222224VDC

Finder 22 Series Modular Monostable Relay 20A 24V DC Coil 2 Normally Open Contacts

GENERAL PURPOSE RELAYS



Component type	Installation contactor for distribution board
Range	Modular Contactor
Model	N/A
Product status	Existing

The Finder range of modular contactors are reliable, efficient switching devices for controlling electrical loads in various industrial and commercial applications. Available in 17.5mm, 36mm and 53.5mm width with AC and DC variants as well as 2 and 4 contact versions and a switching range from 25A to 63A.

ELECTRICAL	Rated operation current	20 A
	Rated operating voltage	250-400 V
	Voltage type for actuating	DC
	Rated excitation voltage 2	21.6-24.6 V
	Rated excitation voltage	21.6-26.4 V
	Rated operation current Ie at AC-1	20 A
	Number of contacts as normally open contact	2
	Number of contacts as normally closed contact	0
	Voltage type (operating voltage)	AC
	Voltage type (excitation voltage)	DC
CONSTRUCTION	Hum-free	Yes
	IP rating	IP20
	Additional equipment possible	No
	With day/night function	No
PHOTOMETRIC	Max. incandescent lamp load	1000 W
	Max. load fluorescent lamp	360 VA
DIMENSIONS	Height	84 mm
	Width	17.4 mm
	Depth	58.4 mm
	Width in number of modular spacings	1


Published on 29 October 2026

222224VDC

Finder 22 Series Modular Monostable Relay 20A 24V DC Coil 2 Normally Open Contacts

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

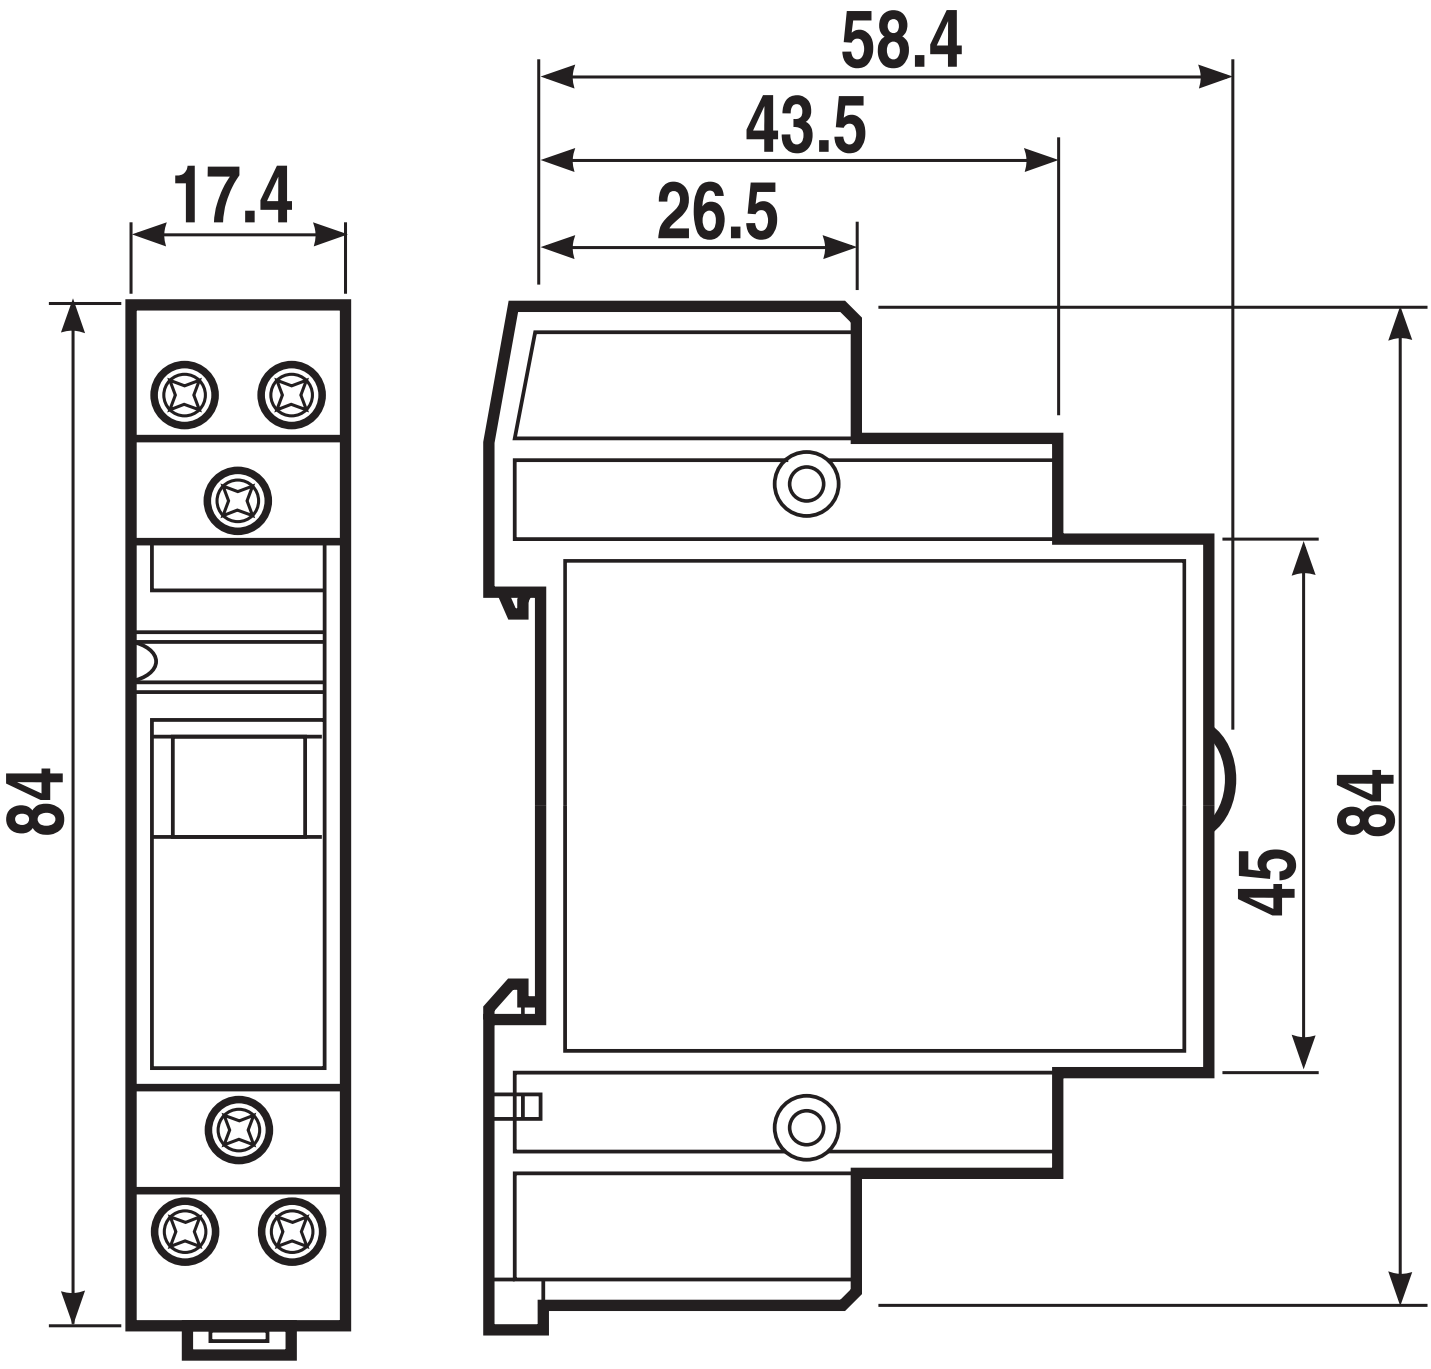

Published on 29 October 2026