# 22BD2P3C104

**Allen-Bradley PowerFlex 40 VSD 3Pole 400V IP66 2.3A 0.37kW ND and HD No EMC**

SMALL AND MID RANGE DRIVES




| | |
|---|---|
| **Component type** | Frequency converter =< 1 kV |
| **Range** | PowerFlex Legacy Compact |
| **Model** | N/A |
| **Product status** | Existing |

The Allen-Bradley PowerFlex Legacy Compact Drivers are a space saving and cost-effective solution with sensorless vector control capability for flexible environmental operating conditions. Fitted with integral keypad, local potentiometer and control keys for fast installation and start-up ensuring maximum productivity. Available with safe torque-off option for enhanced safety.

| | | |
|---|---|---|
| **ELECTRICAL** | Number of phases input | 3 |
| | Nominal input voltage | 415 V |
| | Nominal output power AC | 0.37 kW |
| | Nominal output current I2N | 2.3 A |
| | Dynamic braking transistor | Yes |
| | Control characteristic | PID |
| | EMC-version | No |
| **CONSTRUCTION** | Suitable for safety functions | No |
| | Contains keypad | Yes |
| | Frame size | B |
| | IP rating | IP20 |
| **ENVIRONMENT** | Operating temperature | -10…50 °C |

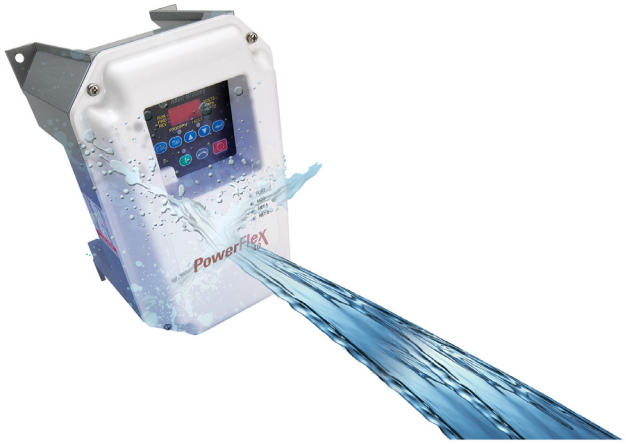

Published on 13 August 2026