32BR3008

Socomec 32BR Load Break Switch kit w/ External Side Op. Handle, 3P 80A

LOAD BREAK SWITCHES

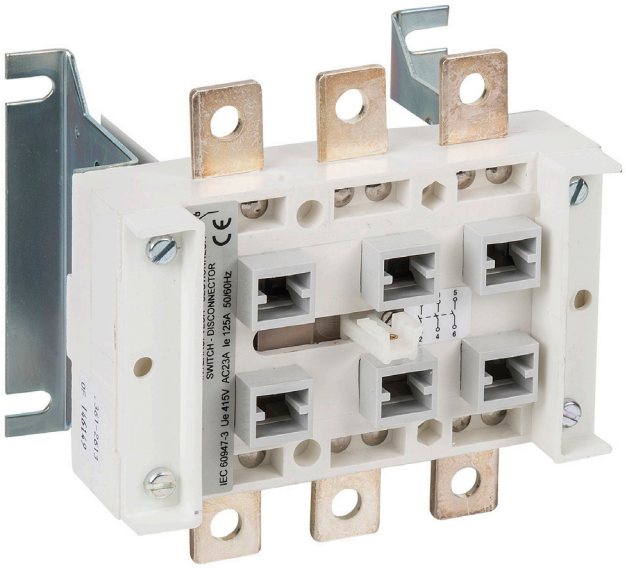

Component type	Switch disconnector
Range	32BR
Model	N/A
Alternative	CALL FOR ALTERNATIVE

The side operated 32BR series of load break switch kits include a red external side mount handle, shaft and additional door interlock from 50 to 800A. Ideal for applications requiring a high degree of safety when isolating supply and equipment. Visible breaking and positive break indication included via gaps on the front of the switch for checking the status of the device during preventive checks.

ELECTRICAL	**Rated permanent current at AC-21, 400 V**	80 A
	Rated uninterrupted current Iu	80 A
	Number of poles	3
	Rated operation power at AC-23, 400 V	30 kW
	Rated operation current Ie at AC-23a, 400 V	63 A
	Rated operation current Ie at AC-23a, 500 V	20 A
	Rated insulation voltage Ui	690 V
	Rated impulse withstand voltage Uimp	6 kV
DIMENSIONS	**Height**	123 mm
	Width	105 mm
	Depth	50.5 mm
	Weight	0.5 kg

Published on 24 July 2026

32BR3008

Socomec 32BR Load Break Switch kit w/ External Side Op. Handle, 3P 80A

LOAD BREAK SWITCHES

DIMENSIONAL DIAGRAM

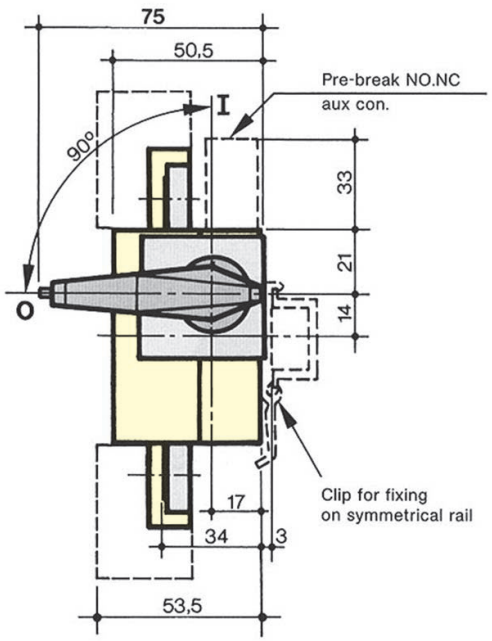

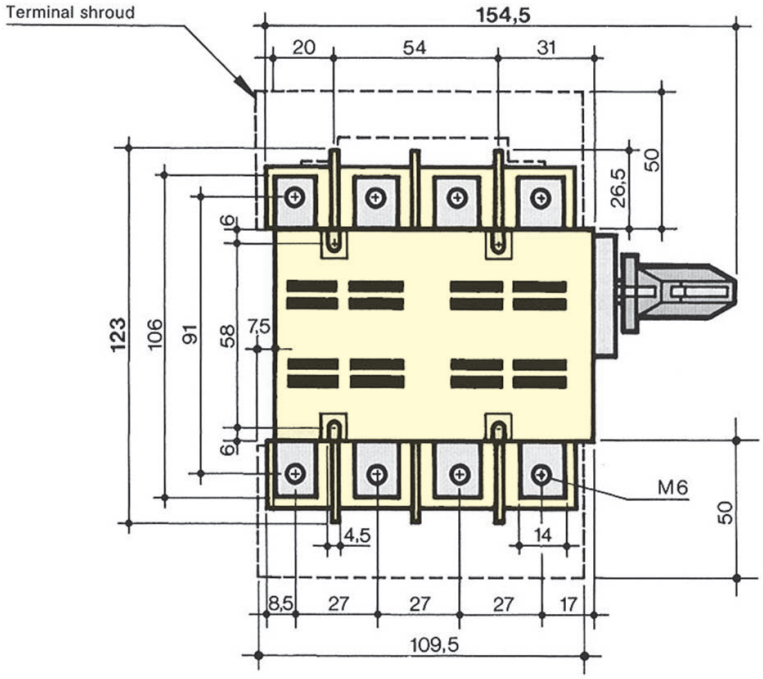



Door drilling

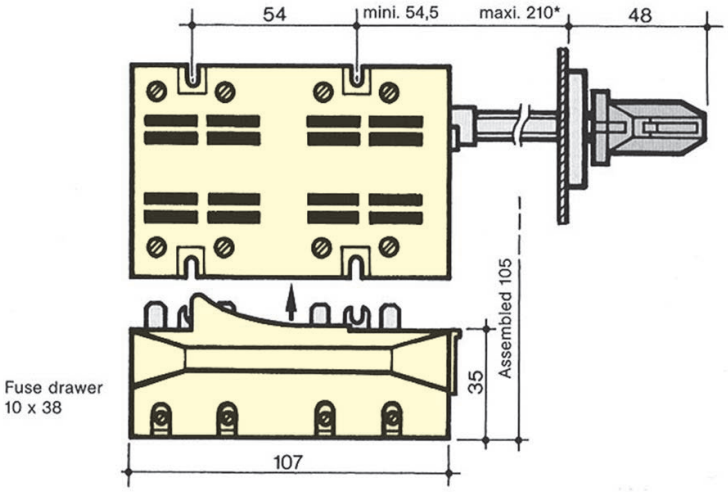

*with shaft extension

Published on 24 July 2026