
39209024125VACDC

Finder 39 Series Master Solid State Relay 2A 1 Normally Open Contact 110V AC DC Coil 24V DC

GENERAL PURPOSE RELAYS

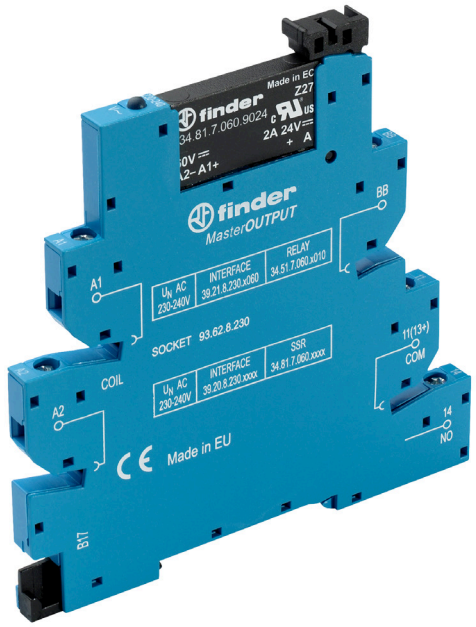

Component type	Switching relay
Range	Solid State Relay
Model	N/A
Product status	Existing

The Finder Solid State PCB and Interface Relays offer reliability and performance for industrial and commercial applications. With advanced semi-conductor technology, high-speed switching, low power consumption and resistance to generating electrical noise. Options include width sizes, AC or DC coil, special coil or input leakage current suppression types, timer version and switching up to 6A.

ELECTRICAL	Nominal current	2 A
	Number of contacts as normally open contact	1
	Breaking capacity at DC-1, 30V	6 A
	Voltage type for actuating	AC/DC
	Control supply voltage Us at AC 50HZ	110 V
	Rated control supply voltage Us at AC 50HZ	110125 V
	Control supply voltage Us at DC	110 V
	Rated control supply voltage Us at DC	110-125 V
	Rated control supply voltage Us at AC 60HZ	110125 V
	Control supply voltage Us at AC 60HZ	110 V
	Type of electric connection	Screw connection
CONSTRUCTION	Material contact	Silver nickel
	Suitable for DIN rail mounting	Yes
	IP rating	IP20
MECHANICAL	Max. shock duration	6 ms
	Max. vibration acceleration	15 m/s²
	Max. vibration frequency, operational	55 Hz
DIMENSIONS	Width	6.2 mm
	Height	87 mm
	Depth	90.7 mm
ENVIRONMENT	Operating temperature	-20…55 °C

Published on 29 October 2026


39209024125VACDC

Finder 39 Series Master Solid State Relay 2A 1 Normally Open Contact 110V AC DC Coil 24V DC

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

39.20
39.21
Screw terminal

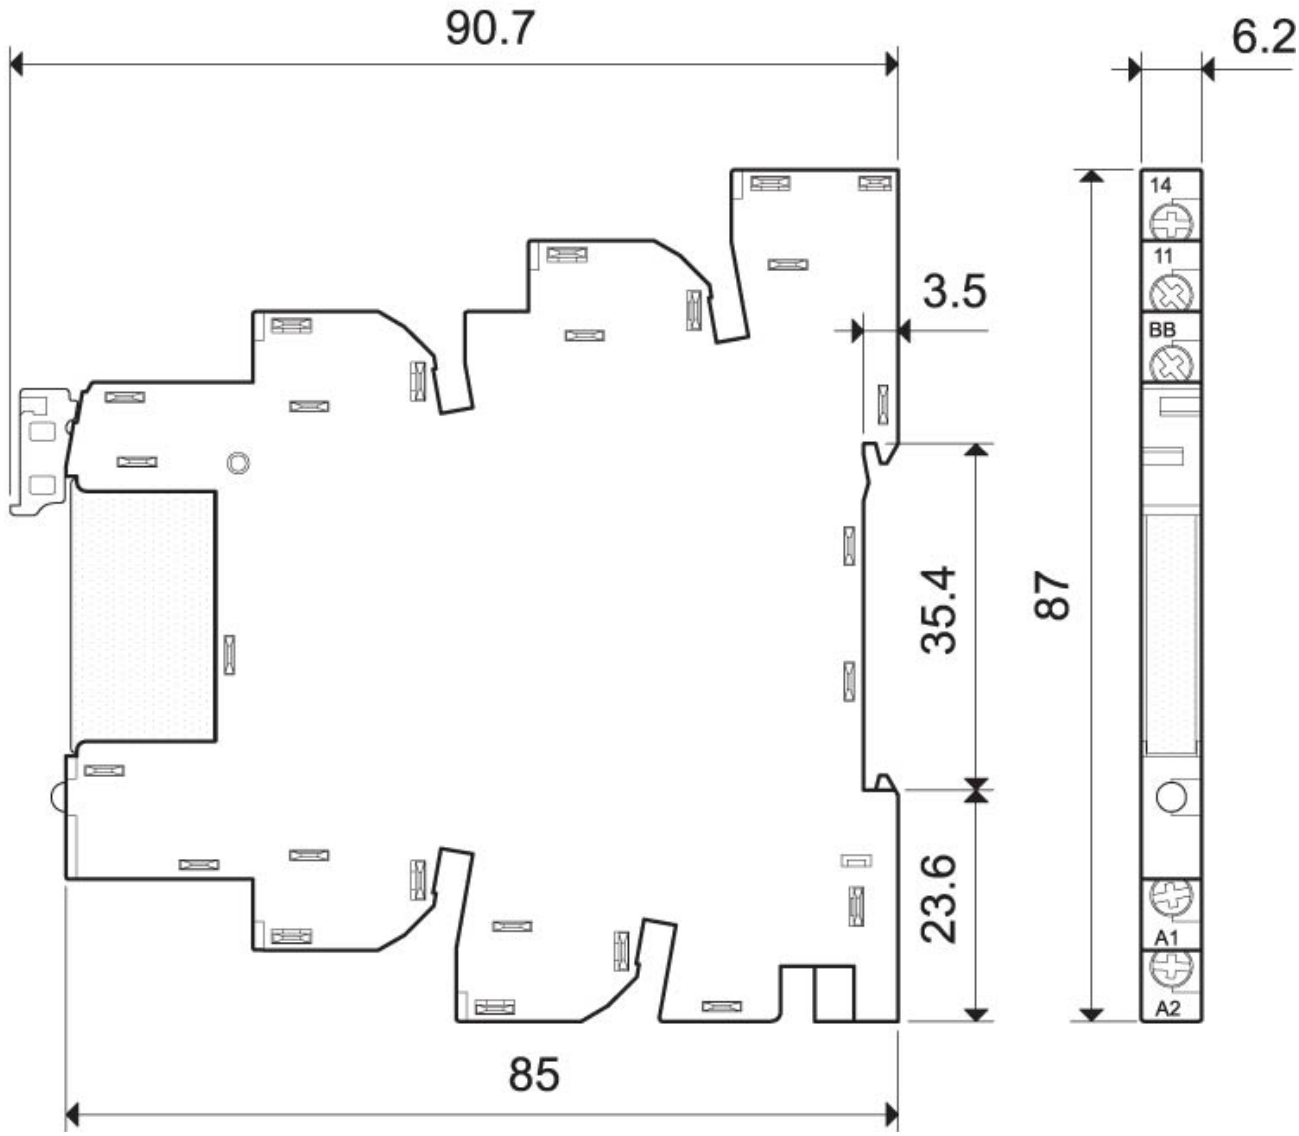

Published on 29 October 2026