39409024125VACDC

Finder 39 Series Master Input Solid State Relay 2A 1 NO Contact 125V AC DC Coil 24V DC Output

GENERAL PURPOSE RELAYS



Component type	Switching relay
Range	Solid State Relay
Model	N/A
Product status	Existing

The Finder Solid State PCB and Interface Relays offer reliability and performance for industrial and commercial applications. With advanced semi-conductor technology, high-speed switching, low power consumption and resistance to generating electrical noise. Options include width sizes, AC or DC coil, special coil or input leakage current suppression types, timer version and switching up to 6A.

ELECTRICAL	Nominal current	2 A
	Number of contacts as normally open contact	1
	Breaking capacity at DC-1, 30V	6 A
	Voltage type for actuating	DC
	Control supply voltage Us at AC 50HZ	125 V
	Control supply voltage Us at DC	125 V
	Control supply voltage Us at AC 60HZ	125 V
	With LED indication	Yes
	Type of electric connection	Screw connection
	Material of contact insert	Thermoplastic
CONSTRUCTION	Material contact	Silver nickel
	Complete with socket	Yes
	Suitable for DIN rail mounting	Yes
	IP rating	IP20
MECHANICAL	Max. shock duration	6 ms
	Max. vibration acceleration	15 m/s²
	Max. vibration frequency, operational	55 Hz
DIMENSIONS	Width	6.2 mm
	Height	94.3 mm
	Depth	90.7 mm
ENVIRONMENT	Operating temperature	-20…55 °C

Published on 29 October 2026

39409024125VACDC

Finder 39 Series Master Input Solid State Relay 2A 1 NO Contact 125V AC DC Coil 24V DC Output

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

39.40
39.41
Screw terminal

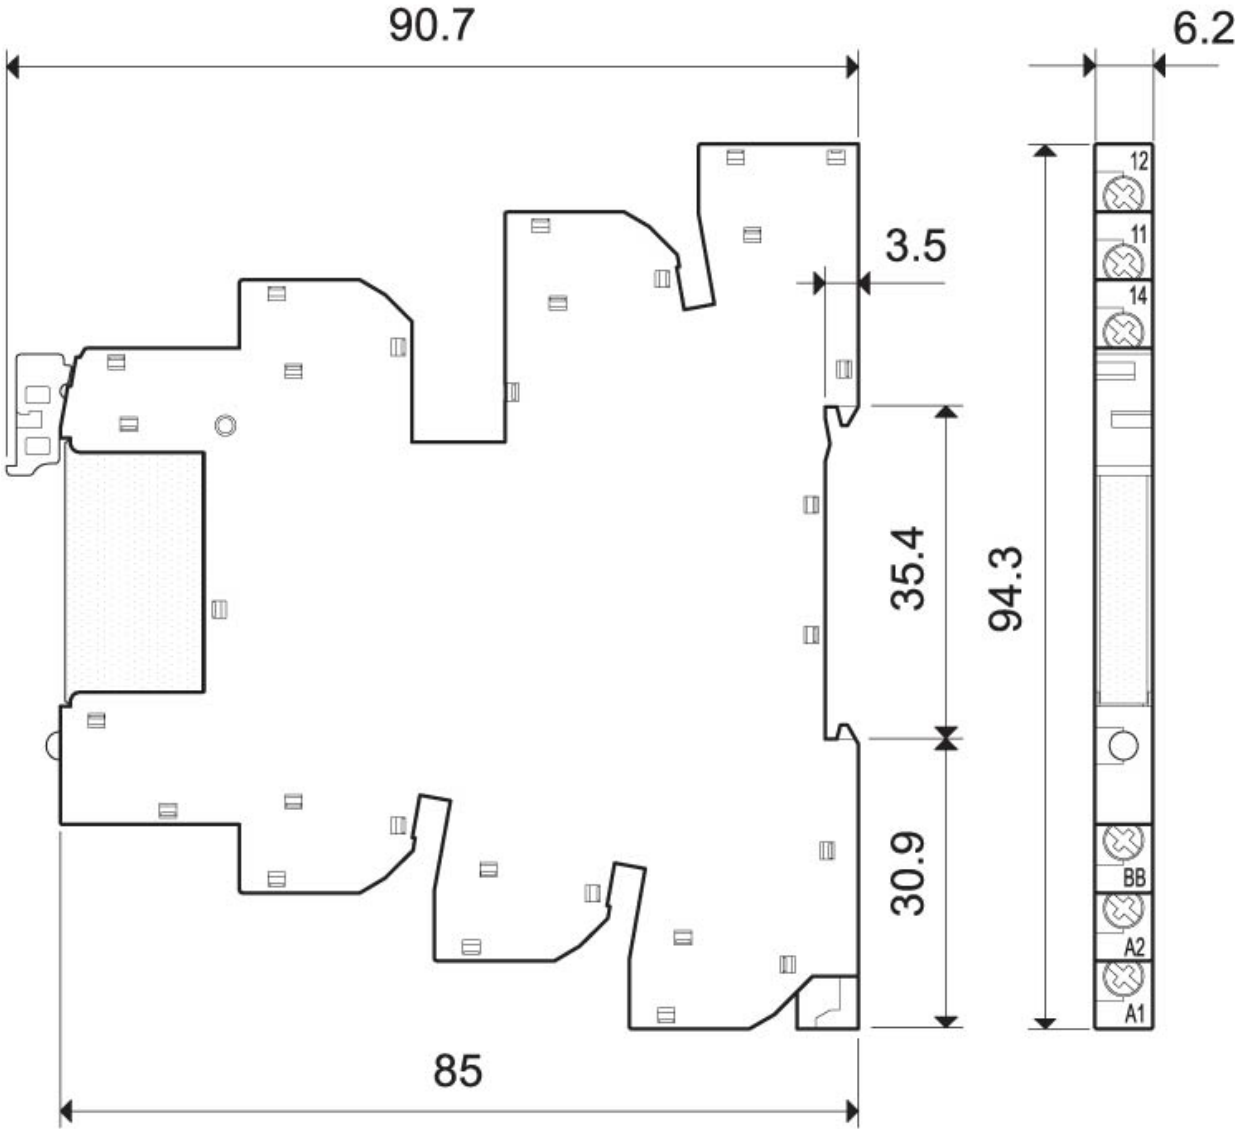

Published on 29 October 2026