
5069IB6F3W

Allen-Bradley Compact 5000 I/O 6 Channel Digital Input 3 Wire 24V DC Fast Module

MID-RANGE CONTROL SYSTEMS

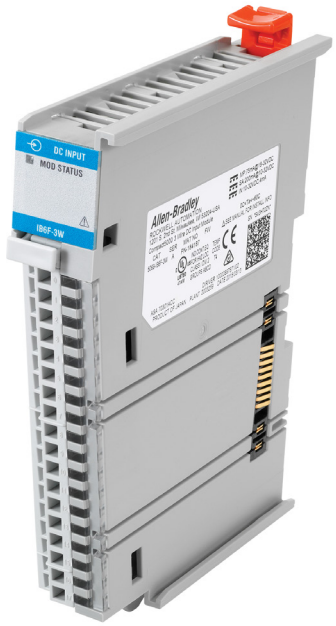

Component type	PLC digital I/O-module
Range	Compact 5000 Safety I/O
Model	N/A
Product status	Existing

Allen-Bradley Compact 5000 I/O Safety Modules provide a flexible, reliable, easy-to-use solution for integrating safety into industrial automation and control systems. Providing distributed I/O to the Compact GuardLogix 5380 and GuardLogix 5580, accessible via a 5069-AEN2TR or 5069-AENTR over an EtherNet/IP and supporting up to 31 I/O modules per controller or adapter.

ELECTRICAL	Permitted voltage at input	10-32 V
	Type of voltage (input voltage)	DC
	Type of digital input	Sinking
	Voltage type of supply voltage	DC
	Digital inputs configurable	No
	Digital outputs configurable	No
	Short-circuit protection, outputs available	No
	Redundancy	No
	Type of electric connection	Screw-/spring clamp connection
CONSTRUCTION	Number of digital inputs	6
	Suitable for safety functions	No
DIMENSIONS	Width	22 mm
	Height	144.57 mm
	Depth	105.42 mm
ENVIRONMENT	Operating temperature	0…60 °C
	Storage temperature	-40…85 °C
	Max. ambient humidity (non-condensing)	95 %

Published on 06 October 2026