

5094IA16


Allen-Bradley FLEX 5000 I/O Digital 16 Input Module 120V AC



IN CABINET DISTRIBUTED IO



Allen-Bradley

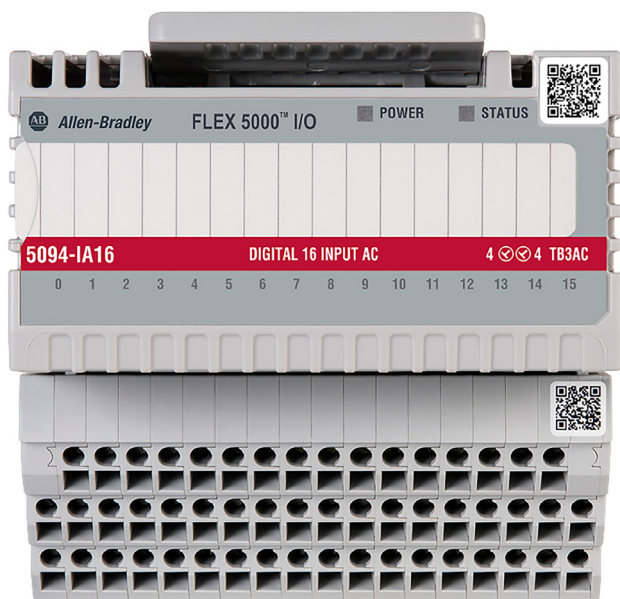

Component type	Fieldbus, decentr. periphery - analogue/digital I/O module
Range	FLEX I/O
Model	N/A
Product status	Existing

The Allen-Bradley FLEX™ I/O system offers a flexible, modular, and cost-effective solution for your industrial automation and control. The space saving design offers rack-based I/O functionality of up to eight modules and provides digital, analogue, HART analogue, and specialty I/O with 4...32 points per module with flexible mounting and wiring options.

ELECTRICAL

Type of voltage (input voltage)	AC
Type of output voltage	AC
Permitted voltage at input	74-132 V
Supply voltage AC 50 Hz	120 V

CONSTRUCTION

Suitable for safety functions	No
Number of digital inputs	16

DIMENSIONS

Width	94 mm
Height	54 mm
Depth	87 mm

ENVIRONMENT

Operating temperature	-40...70 °C
Storage temperature	-40...85 °C
Max. ambient humidity (non-condensing)	95 %

5094IA16

Allen-Bradley FLEX 5000 I/O Digital 16 Input Module 120V AC



IN CABINET DISTRIBUTED I/O



Allen-Bradley

DIMENSIONAL DIAGRAM

