534007

nVent ERIFLEX Flexible Copper Busbar Flexibar Tinned Copper 049.6mm2 4 x 15.5 x 0.8mm Length 2m

FLEXIBLE BUSBARS AND BRAIDS



Component type	Wiring band
Range	Flexible Copper Busbar
Model	N/A
Product status	Existing

The nVent ERIFLEX Flexible Copper Busbar is a high-performance and cost-effective solution for electrical power distribution in industrial and commercial settings. Made of high-quality copper with superior conductivity, available from 125 to 2800A ensuring high current loads whilst minimising energy loss. Offering advanced insulation, a safe, low-smoke, flame-retardant and halogen-free solution.

ELECTRICAL	**Rated operation current**	250 A
	Allowable current rating for deltaT (temp rise), 40K	286 A
	Allowable current rating for deltaT (temp rise), 50K	320 A
	Allowable current rating for deltaT (temp rise), 60K	350 A
	Dielectric strength	20 kV/mm
CONSTRUCTION	**Laminated**	Yes
	Number of lamellas	4
DIMENSIONS	**Length**	2000 mm
	Width	19.1 mm
	Thickness	6.8 mm
	Lamella thickness	1.8 mm


Published on 01 October 2026

534007

nVent ERIFLEX Flexible Copper Busbar Flexibar Tinned Copper 049.6mm2 4 x 15.5 x 0.8mm Length 2m

FLEXIBLE BUSBARS AND BRAIDS

DIMENSIONAL DIAGRAM

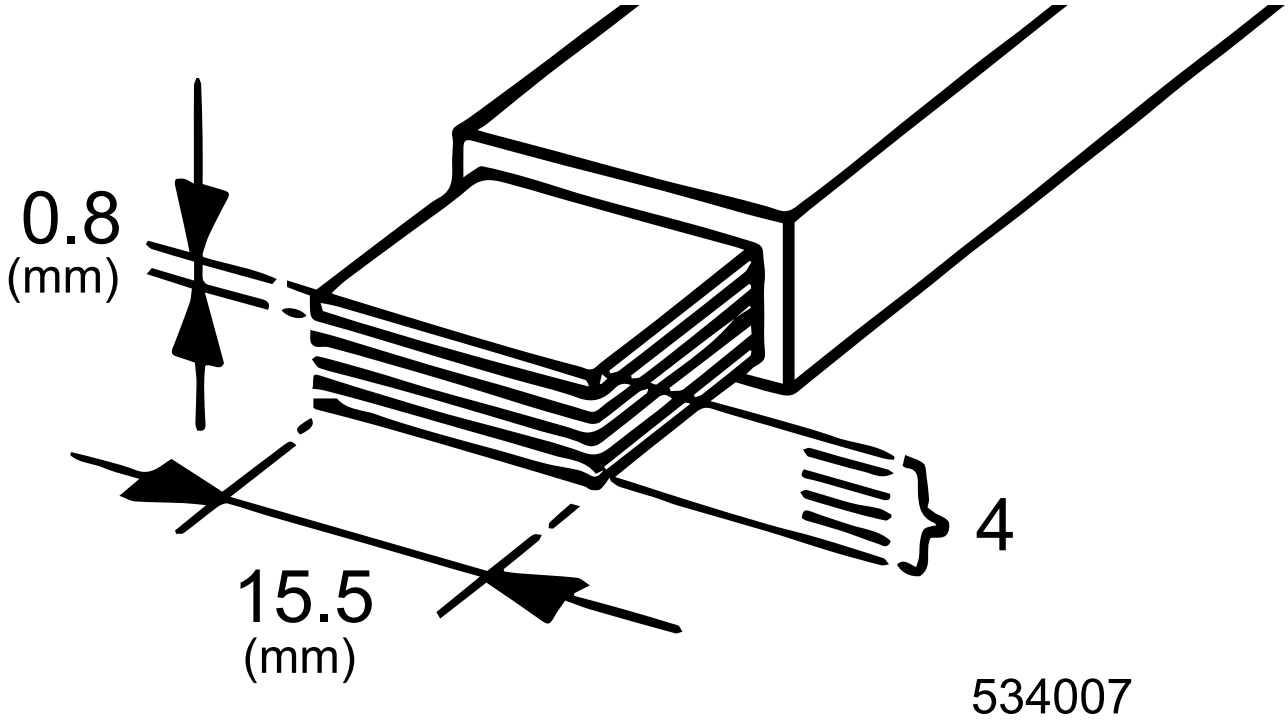

RELATED PRODUCTS

ACCESSORY



Item No: 553550

Required: No

Description: nVent ERIFLEX Flexible Copper Busbar Flexibar Spacer Clamp for up to 24mm Wide Flexible Busbar



Item No: 553590

Required: No

Description: nVent ERIFLEX Flexible Copper Busbar Flexibar Support UFS Kit 24 Retaining Blocks 2M AL Profile



Item No: 559120

Required: No

Description: nVent ERIFLEX Flexible Copper Busbar Flexibar Spare Blade Set for Shearing



Item No: 559145

Required: No

Description: nVent ERIFLEX Flexible Copper Busbar Flexibar Bending Tool MFB

534007

nVent ERIFLEX Flexible Copper Busbar Flexibar Tinned Copper 049.6mm2 4 x 15.5 x 0.8mm Length 2m

FLEXIBLE BUSBARS AND BRAIDS

RELATED PRODUCTS

ACCESSORY



Item No: 559148

Required: No

Description: nVent ERIFLEX Flexible Copper Busbar Flexibar Twisting Tool MFT