# 556690

**nVent ERIFLEX Earth Braids 150A 25mm2 Length 200mm Hole Diameter 10.5mm**

FLEXIBLE BUSBARS AND BRAIDS



| | |
|---|---|
| **Component type** | Earthing strip preassembled |
| **Range** | Earth Braid |
| **Model** | N/A |
| **Product status** | Existing |

The nVent ERIFLEX Earth Braids provide a reliable solution for ensuring safe and efficient electrical grounding in industrial and commercial settings. Made of high-quality materials, such as copper, which provide superior strength, durability, and conductivity, they range from 6-100mm2 in size and are available in pre-cut lengths from 100-500mm or in rolls that can be cut to size.

| | | |
|---|---|---|
| **ELECTRICAL** | **Rated current** | 150 A |
| **CONSTRUCTION** | **Conductor material** | Copper |
| | **Braided** | Yes |
| | **Shape of conductor** | Flat |
| | **Conductor surface** | Tinned |
| | **Conductor category** | Class 5 = flexible |
| | **Cable width approx.** | 22 mm |
| | **Insulated** | No |
| | **With connecting lugs** | Yes |
| | **Connection lugs drilled** | Yes |
| | **With cable lugs** | Yes |
| **DIMENSIONS** | **Nominal cross section conductor** | 25 mm² |
| | **Hole diameter connection** | 10.5 mm |
| | **Length** | 200 mm |
| | **Width** | 22 mm |
| | **Thickness** | 1.5 mm |
| | **Weight** | 0.05 kg |
| | **Cable height approx.** | 1.5 mm |
| **ENVIRONMENT** | **Max. operating temperature** | 105 °C |





Published on 02 October 2026

# 556690

**nVent ERIFLEX Earth Braids 150A 25mm2 Length 200mm Hole Diameter 10.5mm**

FLEXIBLE BUSBARS AND BRAIDS

## DIMENSIONAL DIAGRAM

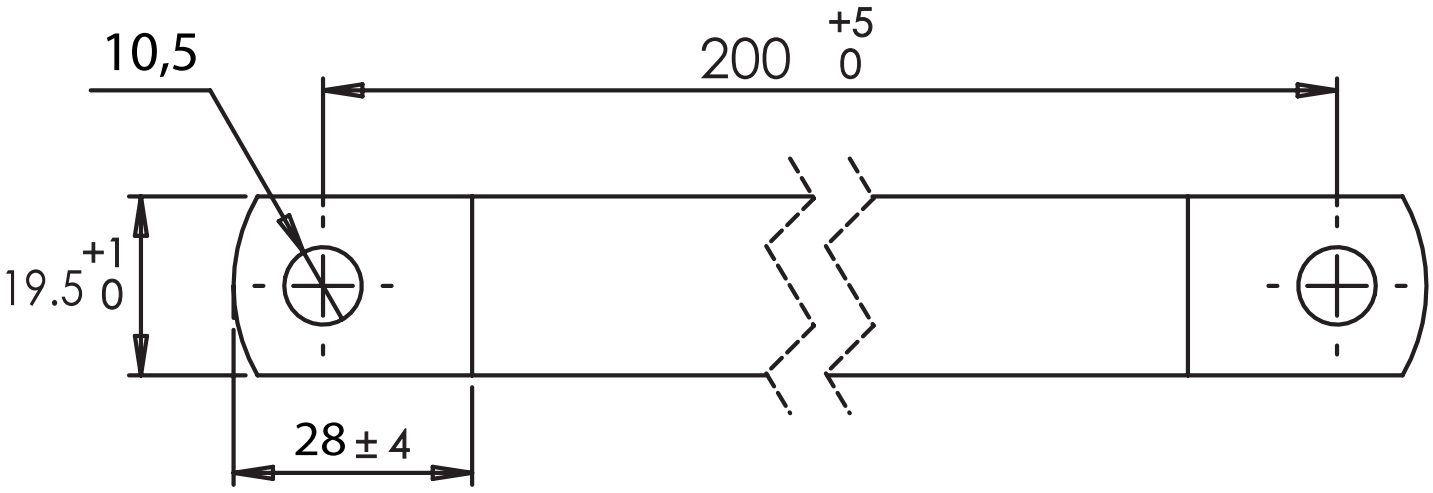




Published on 02 October 2026