561136

nVent ERIFLEX High Current Terminal 1250A In and Out 2 x M10 Lug 25 to 300mm Busbar 20 to 40mm

TERMINALS AND DISTRIBUTION BLOCKS



Component type	Distributor assembly terminal blocks
Range	High Current Terminal
Model	N/A
Product status	Existing

The nVent ERIFLEX range of high current terminals come in current ratings 80A to 1940A and offer connection ratio with 1 or 2 inputs to 1 or 2 output terminals. Terminals are tin plated to cater for copper or aluminium conductors offering IP2X touch protection.

ELECTRICAL	Number of poles	1
	Rated insulation voltage Ui	1000 V
	Short time withstand current Icw, 1 sec	57.6 kA
	Max. rated current	1250 A
CONSTRUCTION	Conductor material	Aluminium/copper
	With PE-rail	No
	With N-rail	No
DIMENSIONS	Height	205.7 mm
	Width	115 mm
	Depth	75 mm


Published on 02 October 2026

561136

nVent ERIFLEX High Current Terminal 1250A In and Out 2 x M10 Lug 25 to 300mm Busbar 20 to 40mm

TERMINALS AND DISTRIBUTION BLOCKS

DIMENSIONAL DIAGRAM

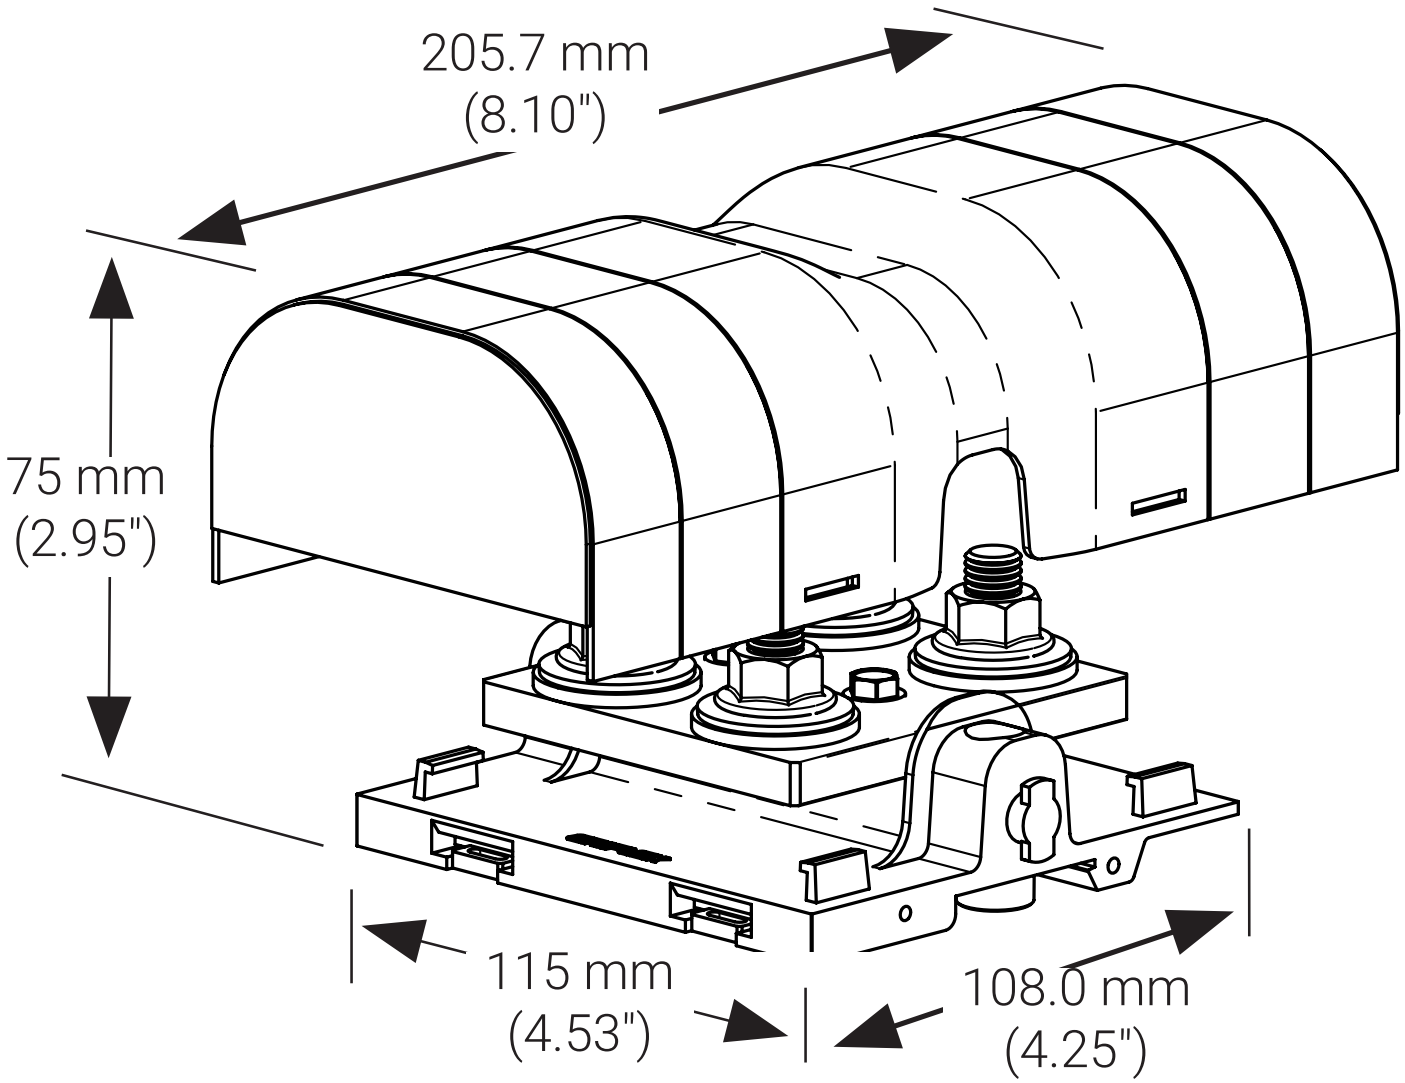

Published on 02 October 2026

RELATED PRODUCTS

ACCESSORY



Item No: 561138

Required: No

Description: nVent ERIFLEX High Current Terminal End Clamp for DIN35 Mount or Panel Mount