561140

nVent ERIFLEX High Current Terminal 350A In 1xM10 Lug 10to120mm Busbar 20to24mm Out 2x10 to 50mm

TERMINALS AND DISTRIBUTION BLOCKS




Component type	Distributor assembly terminal blocks
Range	High Current Terminal
Model	N/A
Product status	Existing

The nVent ERIFLEX range of high current terminals come in current ratings 80A to 1940A and offer connection ratio with 1 or 2 inputs to 1 or 2 output terminals. Terminals are tin plated to cater for copper or aluminium conductors offering IP2X touch protection.

ELECTRICAL	Number of poles	1
	Rated insulation voltage Ui	1000 V
	Short time withstand current Icw, 1 sec	8.4 kA
	Max. rated current	350 A
CONSTRUCTION	Conductor material	Aluminium/copper
	With PE-rail	No
	With N-rail	No
DIMENSIONS	Height	205.7 mm
	Width	52.3 mm
	Depth	65 mm

Published on 02 October 2026

DIMENSIONAL DIAGRAM

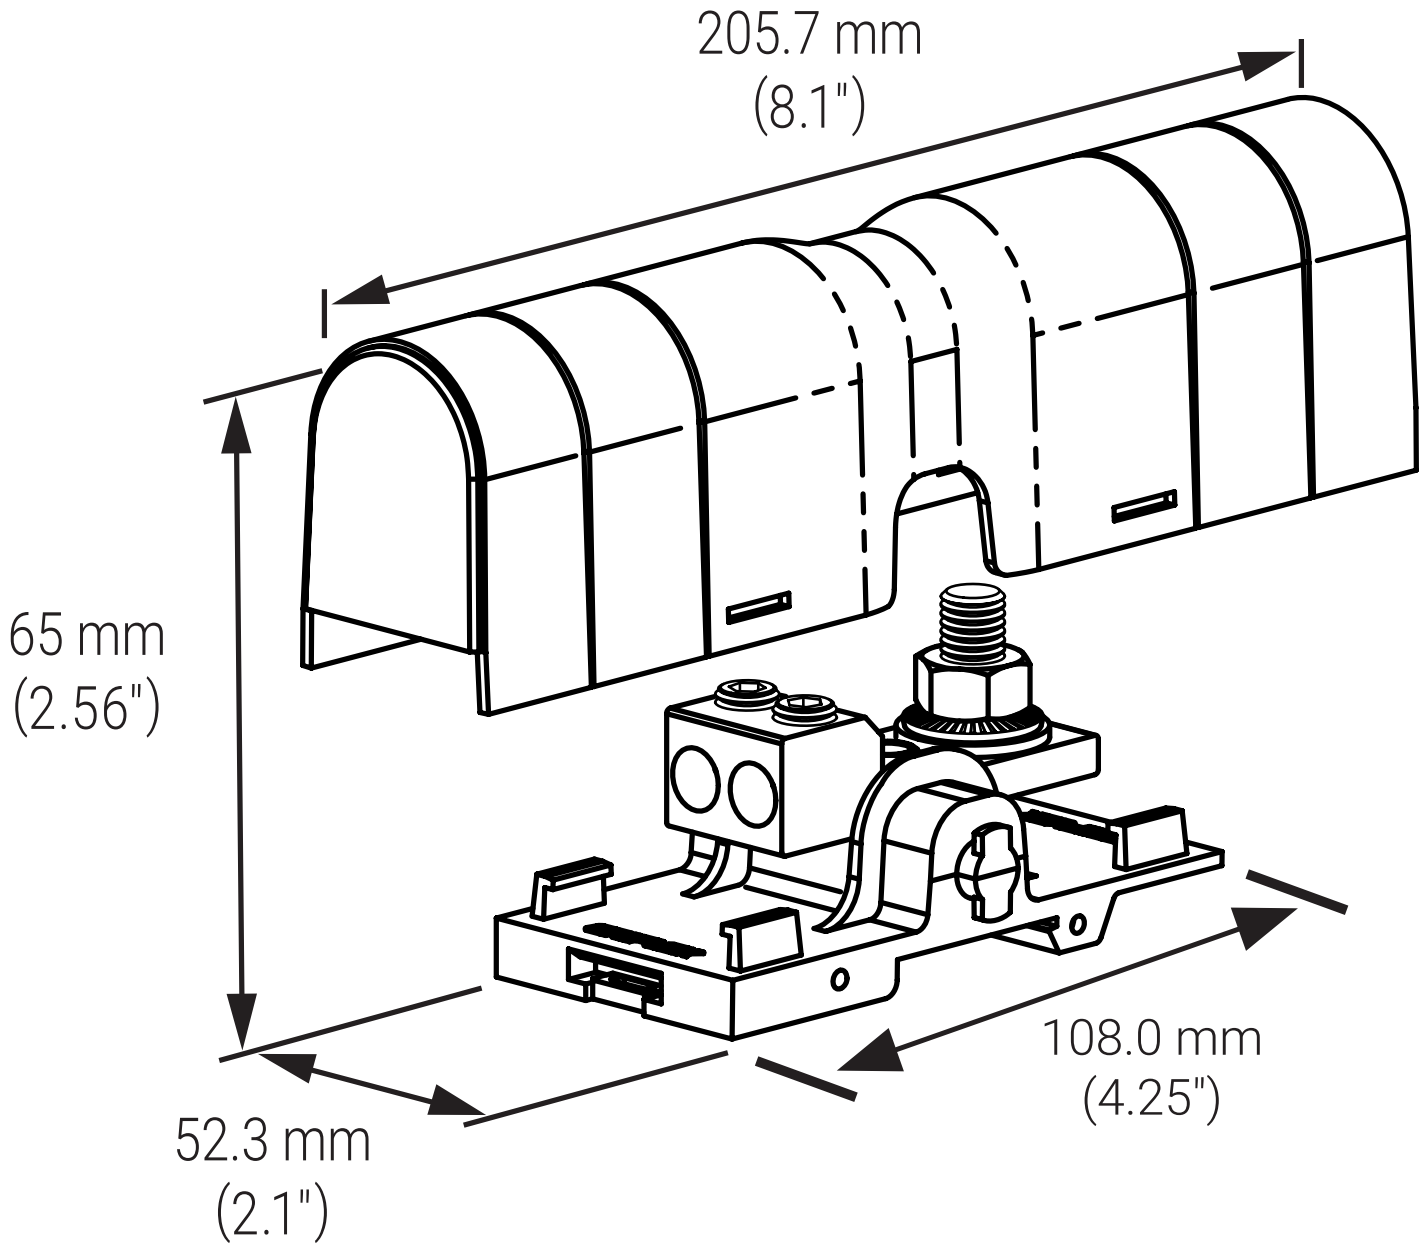

561140

nVent ERIFLEX High Current Terminal 350A In 1xM10 Lug 10to120mm Busbar 20to24mm Out 2x10 to 50mm

RELATED PRODUCTS

ACCESSORY



Item No: 561138

Required: No

Description: nVent ERIFLEX High Current Terminal End Clamp for DIN35 Mount or Panel Mount