
700HA33A234L

Allen-Bradley 700-HA Tube Base Relay 10A 3CO 3PDT 240VAC Coil with Push To Test and Pilotlight

GENERAL PURPOSE RELAYS

NHP | Allen-Bradley

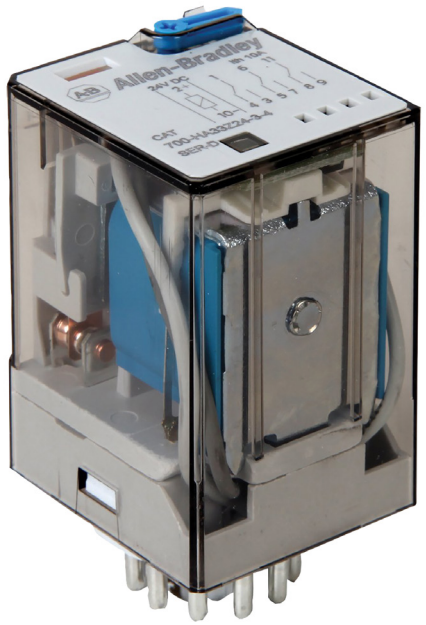

Component type	Switching relay
Range	Panel Mount and Power Relays
Model	N/A
Product status	Existing

ELECTRICAL	**Nominal current**	10 A
	Nominal voltage AC	250 V
	Number of contacts as change-over contact	3
	Rated switching power at AC-1	2500 VA
	Rated switching power at AC-15, 230V	500 VA
	Breaking capacity at DC-1, 30V	10 A
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	240 V
	Control supply voltage Us at AC 60HZ	240 V
	With LED indication	Yes
	Type of electric connection	Plug-in connection
	Electrical life at Un, In (service cycles)	100000 cycles
	Operating voltage	192-264 V
CONSTRUCTION	**Material contact**	Silver nickel
	With latching test button	Yes
	Suitable for plug-in socket mounting	Yes
	IP rating	IP40
MECHANICAL	**Mechanical life (service cycles)**	2.0E7 cycles
	Max. shock acceleration	50 g
	Max. vibration acceleration	5 m/s²
DIMENSIONS	**Width**	32.8 mm
	Height	36.5 mm
	Depth	54.1 mm
ENVIRONMENT	**Operating temperature**	-40…70 °C


Published on 23 October 2026


700HA33A234L

Allen-Bradley 700-HA Tube Base Relay 10A 3CO 3PDT 240VAC Coil with Push To Test and Pilotlight

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

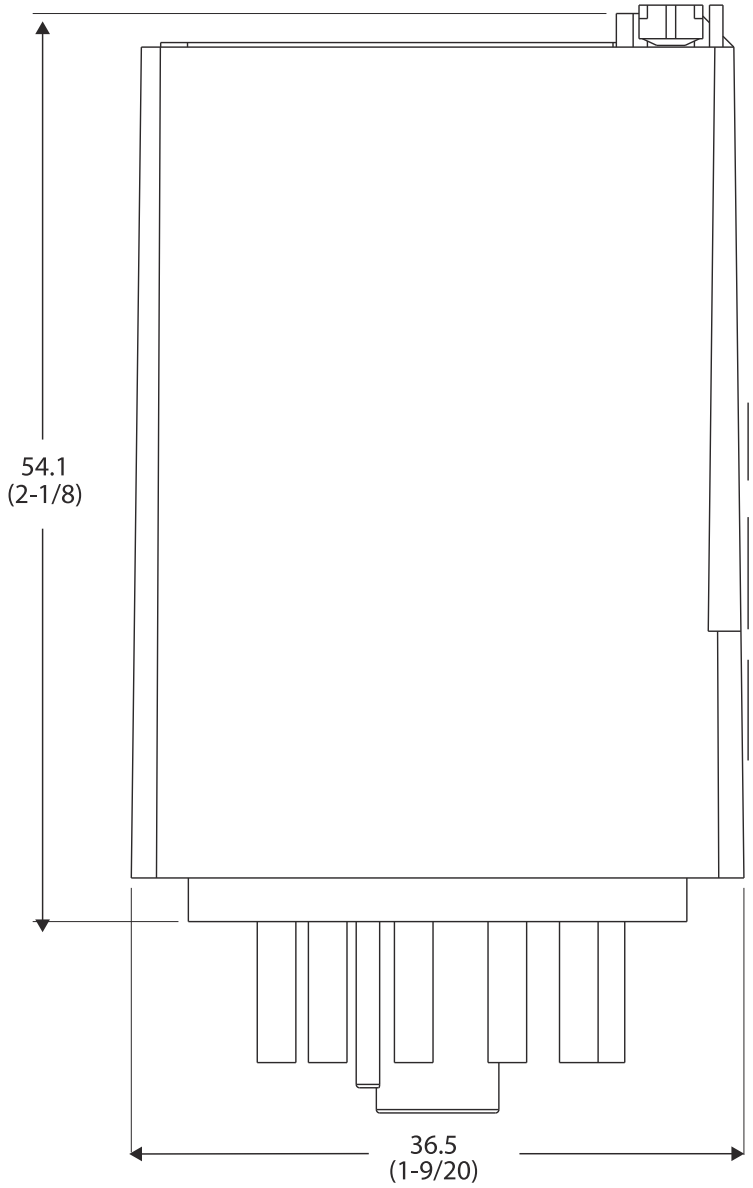

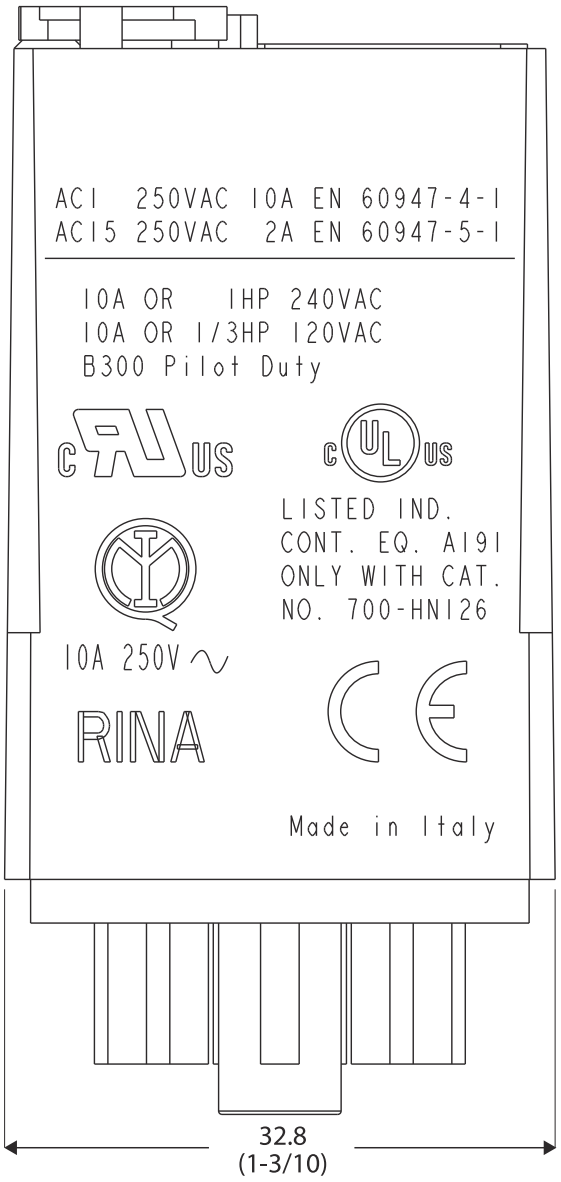

Published on 23 October 2026