
700HC24A24L

Allen-Bradley 700-HC Plug In Relay 7A 4CO 240VAC Silver Contacts Low Energy Rating 10V 10mA with PL

GENERAL PURPOSE RELAYS

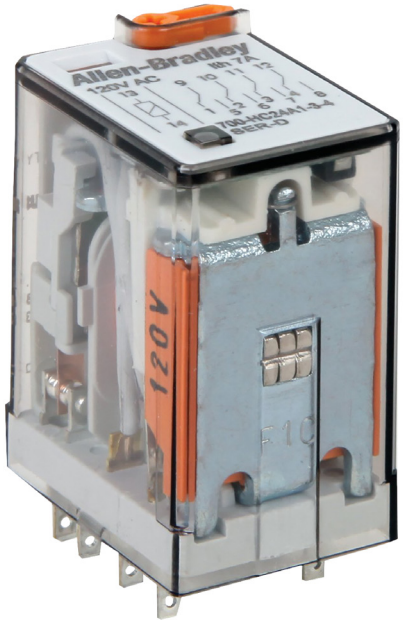

Component type	Switching relay
Range	Panel Mount and Power Relays
Model	N/A
Product status	Existing

ELECTRICAL	Nominal current	7 A
	Nominal voltage AC	250 V
	Max. rated operation voltage Ue AC	277 V
	Number of contacts as change-over contact	4
	Rated switching power at AC-1	1750 VA
	Rated switching power at AC-15, 230V	350 VA
	Breaking capacity at DC-1, 30V	7 A
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	240 V
	Control supply voltage Us at AC 60HZ	240 V
	With LED indication	Yes
	Type of electric connection	Plug-in connection
	Electrical life at Un, In (service cycles)	100000 cycles
	Operating voltage	19.2-26.4 V
CONSTRUCTION	Material contact	Silver nickel
	Suitable for plug-in socket mounting	Yes
	IP rating	IP20
MECHANICAL	Mechanical life (service cycles)	2.0E7 cycles
DIMENSIONS	Width	20.7 mm
	Height	27.7 mm
	Depth	37.2 mm
ENVIRONMENT	Operating temperature	-30…55 °C


Published on 30 September 2026

700HC24A24L

Allen-Bradley 700-HC Plug In Relay 7A 4CO 240VAC Silver Contacts Low Energy Rating 10V 10mA with PL

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

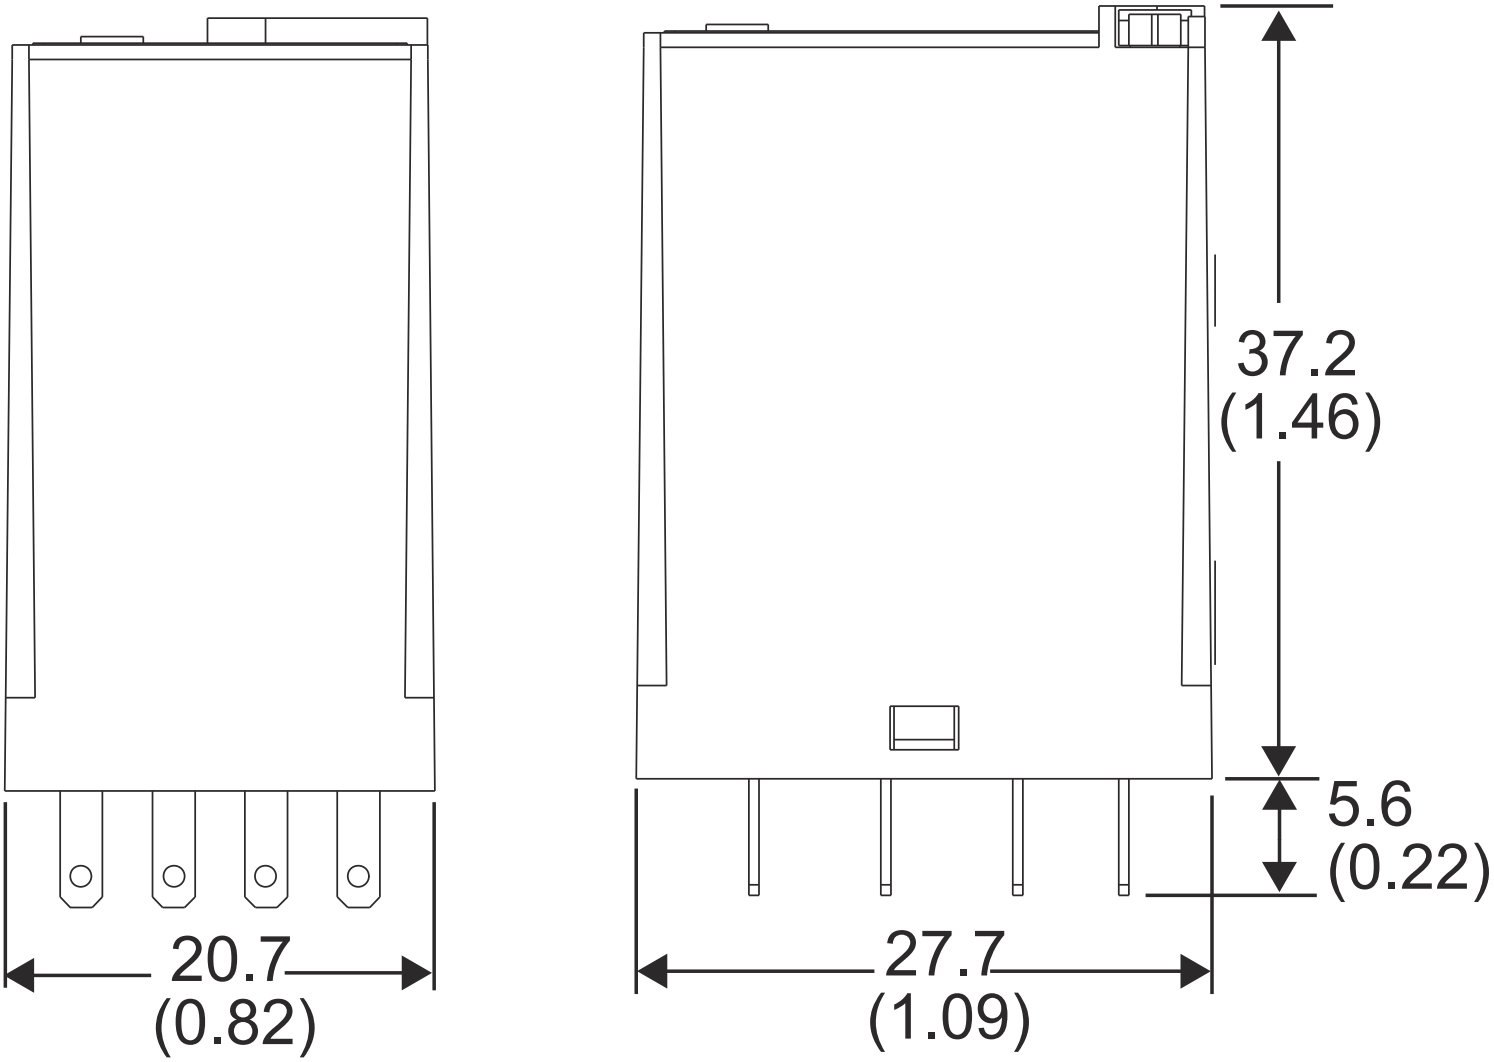

Published on 30 September 2026