
700HC24Z2434

Allen-Bradley 700-HC Plug In Relay 7A 4CO 24V DC Silver Contacts Push To Test and PL

GENERAL PURPOSE RELAYS

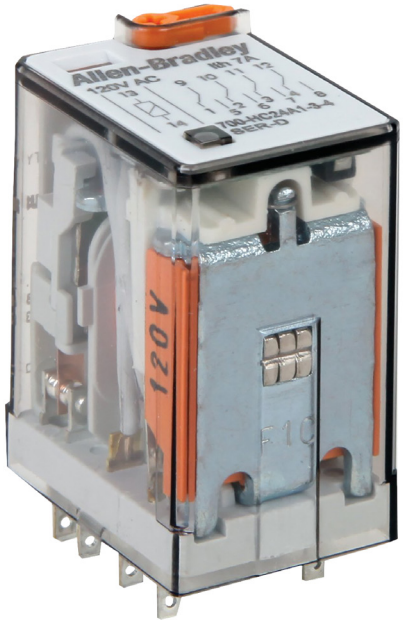

Component type	Switching relay
Range	Panel Mount and Power Relays
Model	N/A
Product status	Existing

ELECTRICAL	Nominal current	7 A
	Nominal voltage AC	250 V
	Max. rated operation voltage Ue AC	277 V
	Number of contacts as change-over contact	4
	Rated switching power at AC-1	1750 VA
	Rated switching power at AC-15, 230V	350 VA
	Breaking capacity at DC-1, 30V	7 A
	Voltage type for actuating	DC
	Control supply voltage Us at DC	24 V
	With LED indication	Yes
	Type of electric connection	Plug-in connection
	Electrical life at Un, In (service cycles)	100000 cycles
CONSTRUCTION	Material contact	Silver nickel
	With latching test button	Yes
	Suitable for plug-in socket mounting	Yes
	IP rating	IP20
MECHANICAL	Mechanical life (service cycles)	5.0E7 cycles
DIMENSIONS	Width	20.7 mm
	Height	27.7 mm
	Depth	37.2 mm
ENVIRONMENT	Operating temperature	-30…55 °C


Published on 29 October 2026

700HC24Z2434

Allen-Bradley 700-HC Plug In Relay 7A 4CO 24V DC Silver Contacts Push To Test and PL

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

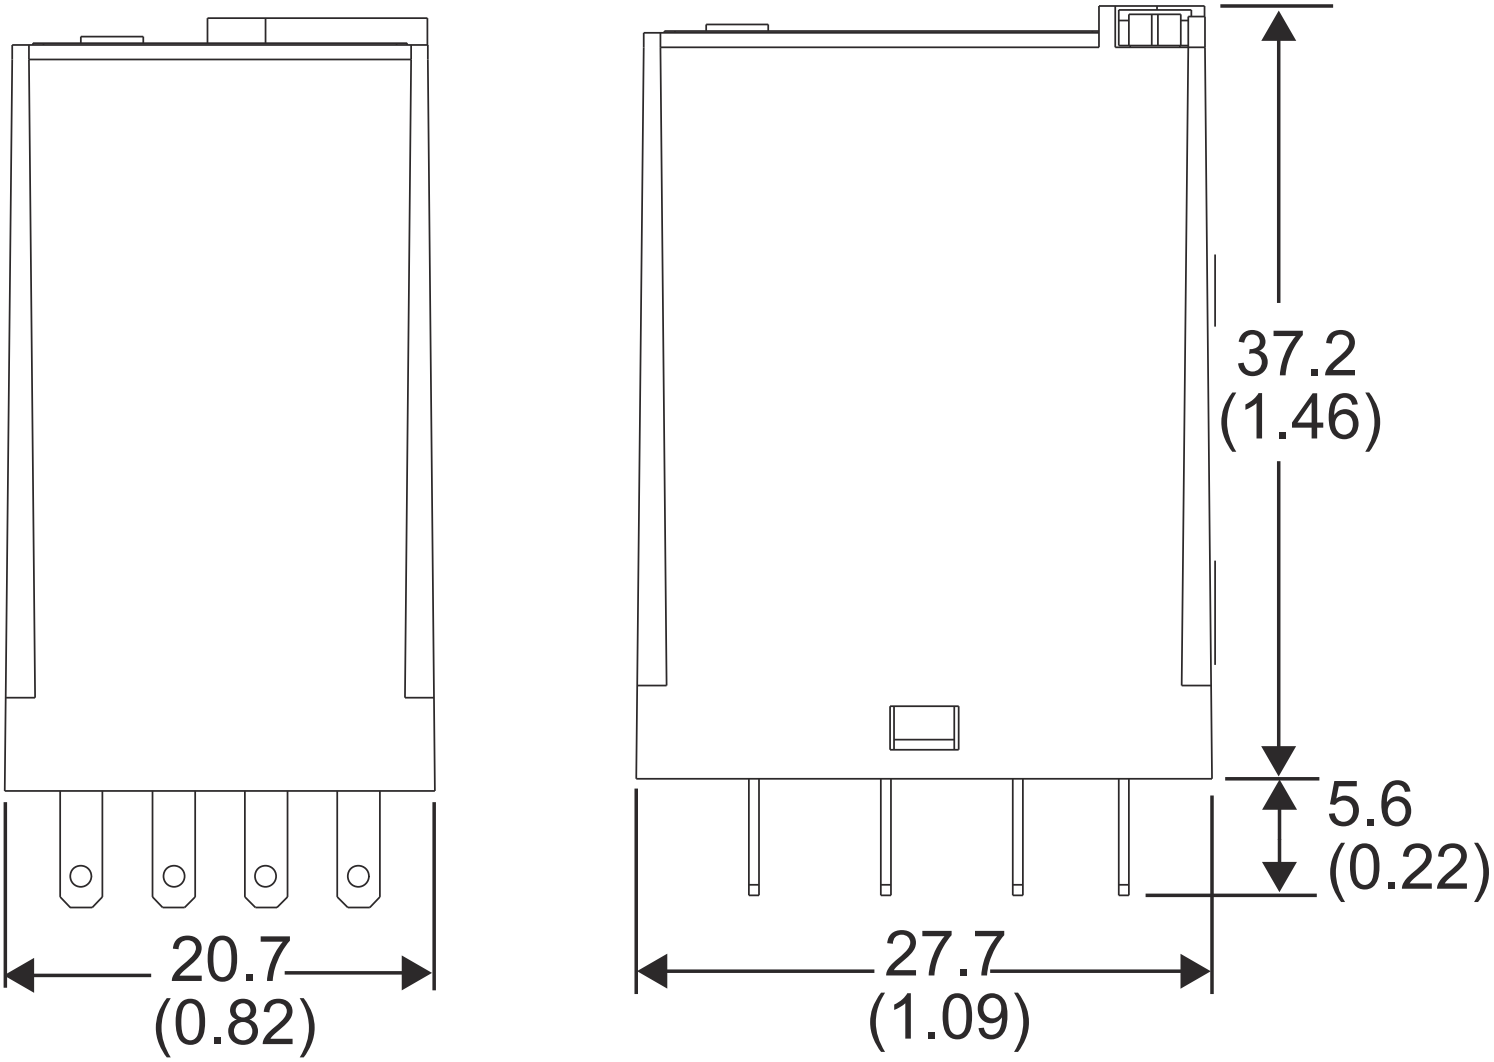

Published on 29 October 2026