
700HK36A2434

Allen-Bradley 700-HK Slim Line Relay 16A 1CO SPDT 24VAC Coil Push ToTest and PL

GENERAL PURPOSE RELAYS

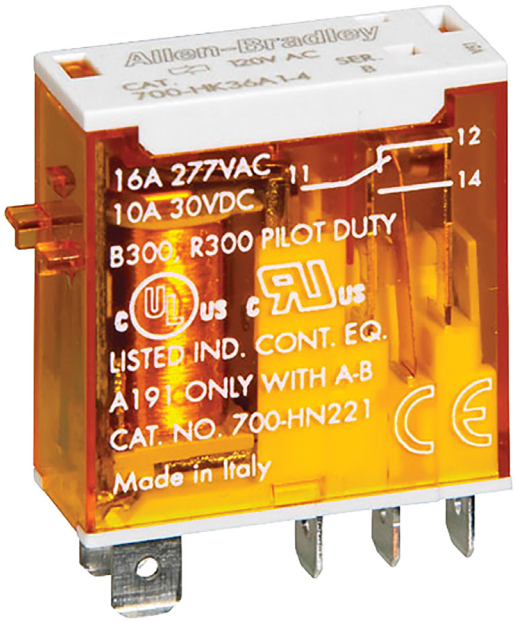

Component type	Switching relay
Range	700HK
Model	N/A
Product status	Existing

The Allen-Bradley 700-HK series of slimline general purpose relays is a reliable and efficient switching solution for use in a wide range of applications. Capable of handling voltages in both 16A SPDT and 8A DPDT configurations. Available with manual override and push-to-test options, slot-to-insert markers and jumpers, gold plated contact options, and able to accommodate plug-in modules.

ELECTRICAL	Nominal current	16 A
	Nominal voltage AC	250 V
	Number of contacts as change-over contact	1
	Rated switching power at AC-1	4000 VA
	Rated switching power at AC-15, 230V	750 VA
	Breaking capacity at DC-1, 30V	12 A
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	24 V
	Control supply voltage Us at AC 60HZ	24 V
	With LED indication	Yes
	Type of electric connection	Plug-in connection
	Electrical life at Un, In (service cycles)	30000 cycles
	Operating voltage	192-264 V
CONSTRUCTION	Material contact	Silver nickel
	With latching test button	Yes
	Suitable for plug-in socket mounting	Yes
	IP rating	IP20
MECHANICAL	Mechanical life (service cycles)	1.0E7 cycles
	Max. shock acceleration	50 g
	Max. vibration acceleration	5 m/s²
	Max. vibration frequency, operational	2000 Hz
DIMENSIONS	Width	12.4 mm
	Height	29 mm
	Depth	39.3 mm
ENVIRONMENT	Operating temperature	-40…70 °C


Published on 23 October 2026


700HK36A2434

Allen-Bradley 700-HK Slim Line Relay 16A 1CO SPDT 24VAC Coil Push ToTest and PL

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

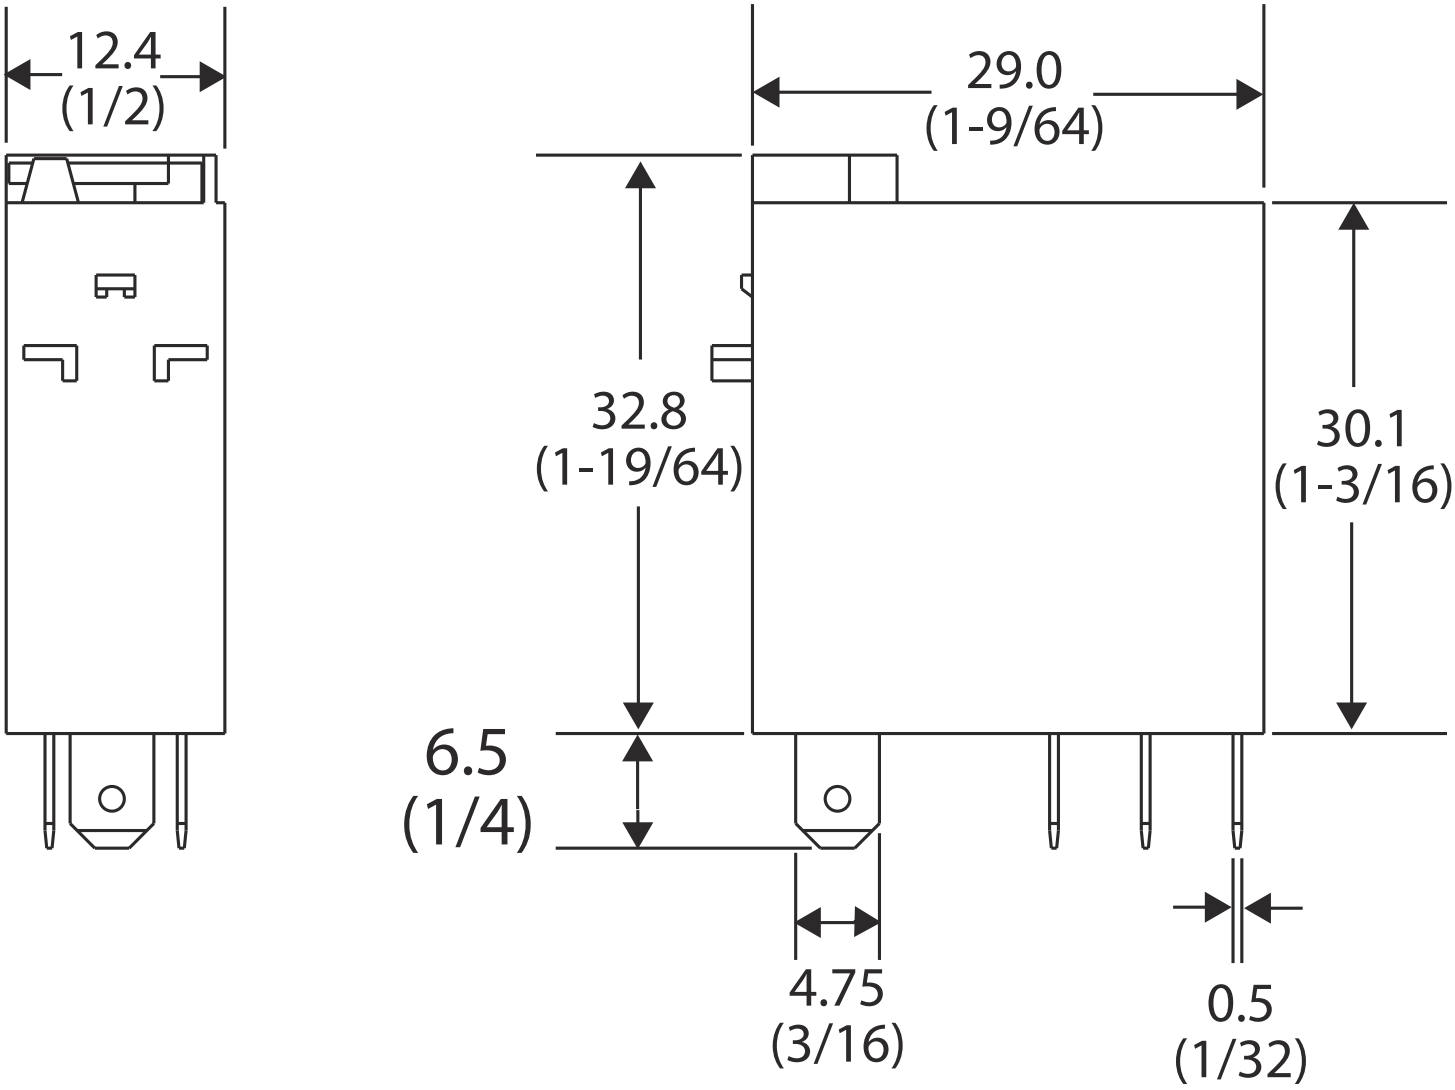

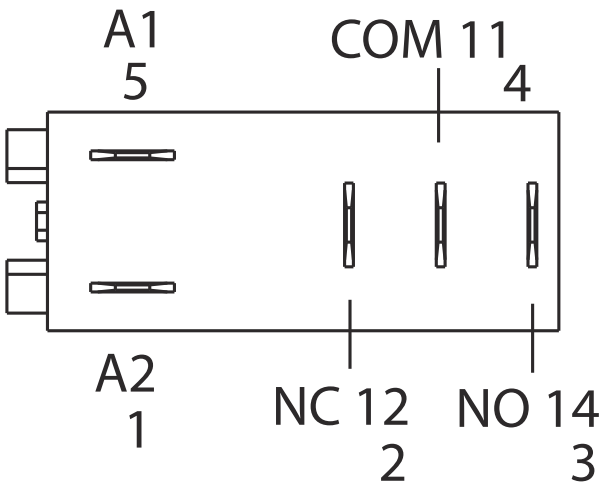

Published on 23 October 2026