


CA71201240VACU

S+S CA7 Contactor 5.5kW 3Pole 240VAC Coil 1NC Contact
Auxiliary



CONTACTORS

sprecher+schuh

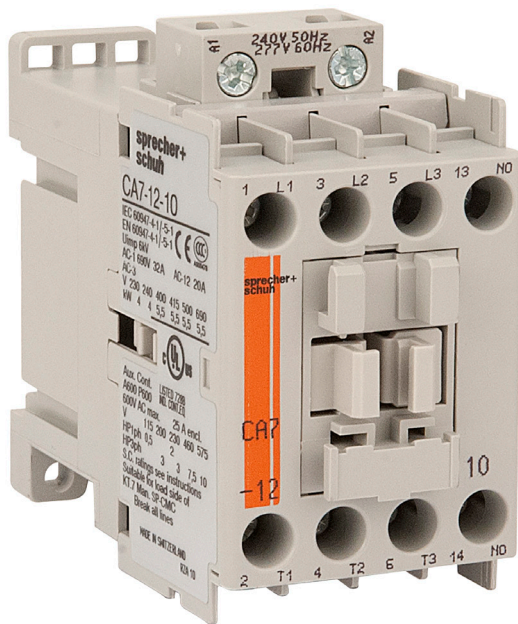

Component type	Power contactor, AC switching
Range	CA7
Model	N/A
Product status	Existing

The Sprecher + Schuh CA7 contactors are the ideal solution for reliable and durable electrical components. It is a modern and flexible IEC power contactor for DOL starting needs with up to 100A AC3 and wide range selection covering from 4kW up to 63kW (400V).

ELECTRICAL

Number of normally open contacts as main contact	3
Number of normally closed contacts as main contact	0
Rated operation current I_e at AC-3, 400 V	12 A
Rated operation power at AC-3, 400 V	5.5 kW
Rated operation current I_e at AC-1, 400 V	32 A
Max. rated operation voltage U_e AC	690 V
Voltage type for actuating	AC
Control supply voltage U_s at AC 50HZ	24 V
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as normally closed contact	1
Rated operation current I_e at AC-3, 690 V	7 A
Rated operation power at AC-3, 690 V	5.5 kW
Rated operation power at AC-4, 400 V	3 kW
Control supply voltage U_s at AC 60HZ	24 V
Power consumption, AC coil pickup	75 VA
Power consumption, AC coil hold-in	9.5 VA
Type of electrical connection of main circuit	Screw connection
Rated operation current I_e at AC-4, 400 V	6.6 A

CONSTRUCTION

IP rating	IP2X
Mounting method	DIN-rail/screw

DIMENSIONS

Height	81 mm
Width	45 mm
Depth	86.5 mm
Weight	0.39 kg

CA71201240VACU

S+S CA7 Contactor 5.5kW 3Pole 240VAC Coil 1NC Contact
Auxiliary



CONTACTORS

sprecher+schuh

DIMENSIONAL DIAGRAM

