
CPTBNV110

Cirprotec BNV Surge Protection Device KNX Bus 2 Wire IO Imax 5kA 110VAC DIN Mount

SURGE PROTECTION DEVICES

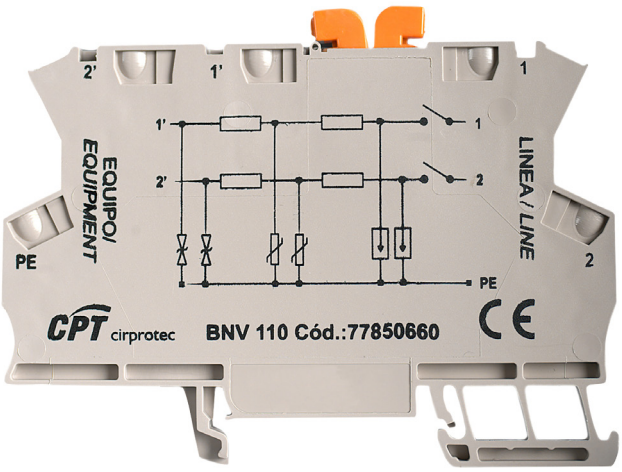

Component type	Surge protection device for data networks/ MCR-technology
Range	Final Diverter
Model	N/A
Product status	Existing

ELECTRICAL	Nominal voltage AC	110 V
	Max. continuous voltage AC	130 V
	Nominal discharge surge current (8/20)	5 kA
	Max. discharge surge current (8/20)	5 kA
	Nominal load current	0.3 A
	Voltage protection level core/earth	45 V
	Frequency	3000000 MHz
	Number of protected wires	2
CONSTRUCTION	Mounting method	DIN rail (top hat rail) 35 mm
	IP rating	IP20
DIMENSIONS	Max. conductor cross section	2.5 mm²
	Height	91.6 mm
	Width	6 mm
	Depth	63.2 mm
	Weight	0.03 kg


Published on 22 March 2025

CPTBNV110

Cirprotec BNV Surge Protection Device KNX Bus 2 Wire IO Imax 5kA 110VAC DIN Mount

SURGE PROTECTION DEVICES

DIMENSIONAL DIAGRAM

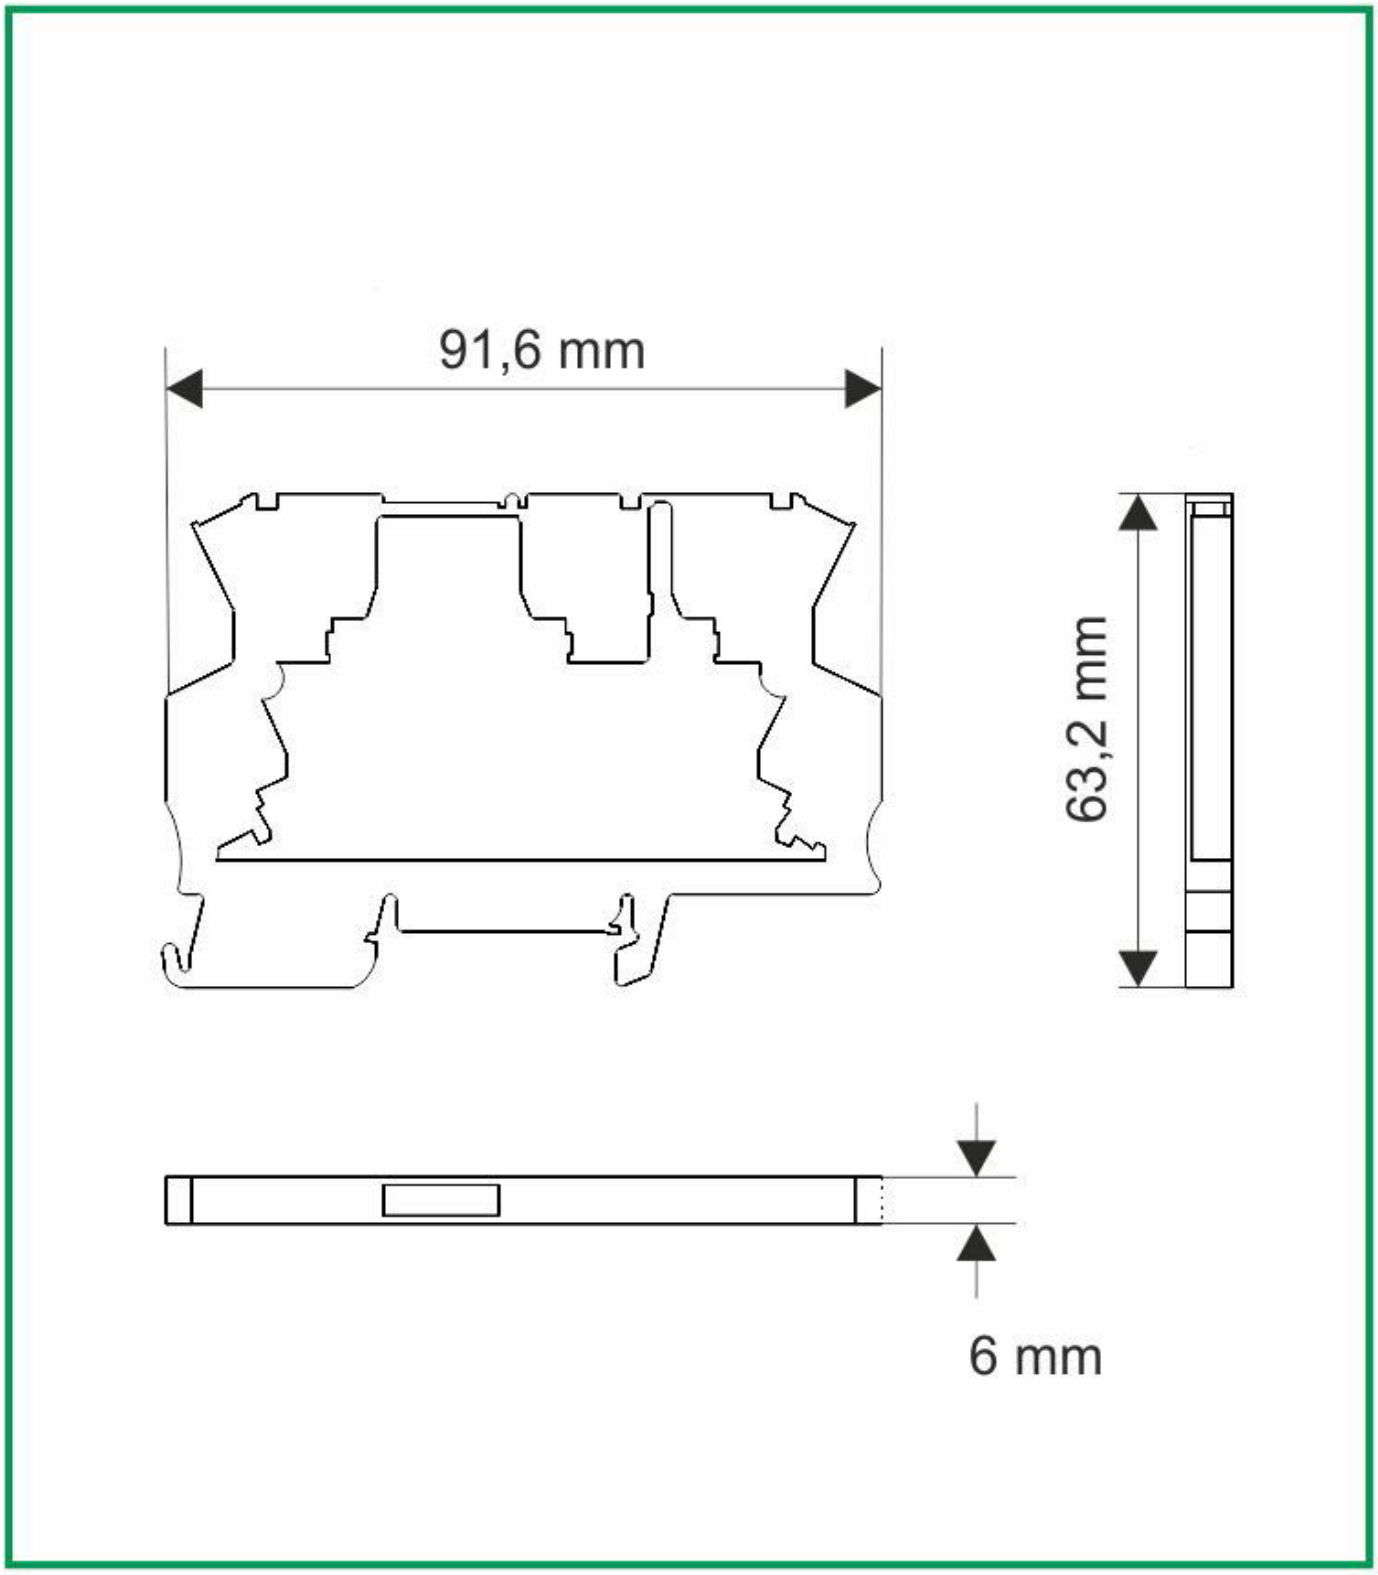

Published on 22 March 2025