GH15LN22240VAC

Ghisalba Contactor 45kW 4Pole 240VAC Coil 2NO 2NC Contact Auxiliary

NHP ELECTRICAL ENGINEERING PRODUCTS



Component type	Power contactor, AC switching
Range	Contactors
Model	N/A
Product status	Existing

Ghisalba's range of contactor families are available in a wide variety of contactor sizes, offering both economy and choice. Specialising in 3 and 4 pole contactors, with ranges from 4kW up to 710kW at 415V AC and 280kW up to 500kW at 1000V AC and additional DC switching contactors for up to 1000V DC.

ELECTRICAL	Number of normally open contacts as main contact	2
	Number of normally closed contacts as main contact	2
	Rated operation current Ie at AC-3, 400 V	95 A
	Rated operation power at AC-3, 400 V	45 kW
	Rated operation current Ie at AC-1, 400 V	135 A
	Max. rated operation voltage Ue AC	1000 V
	Voltage type for actuating	AC
	Rated control supply voltage Us at AC 50HZ	220-240 V
	Control supply voltage Us at AC 50HZ	240 V
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as normally closed contact	0
	Rated operation current Ie at AC-3, 1000 V	25 A
	Rated control supply voltage Us at AC 60HZ	220-240 V
	Type of electrical connection of main circuit	Screw connection
CONSTRUCTION	IP rating	IP20
	Mounting method	DIN-rail/screw
DIMENSIONS	Height	142 mm
	Width	106 mm
	Depth	130 mm
	Weight	1.3 kg


Published on 30 May 2026


GH15LN22240VAC


Ghisalba Contactor 45kW 4Pole 240VAC Coil 2NO 2NC Contact Auxiliary

ELECTRICAL ENGINEERING PRODUCTS

DIMENSIONAL DIAGRAM

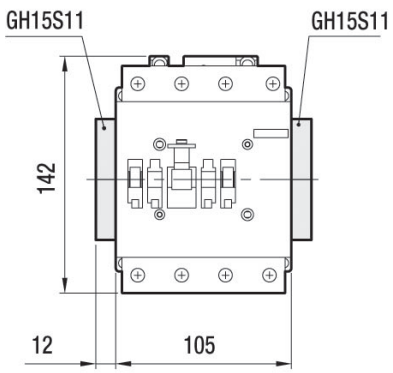

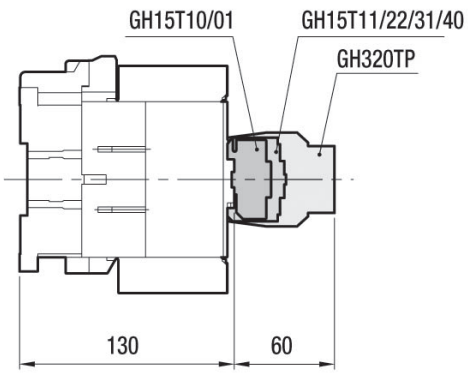

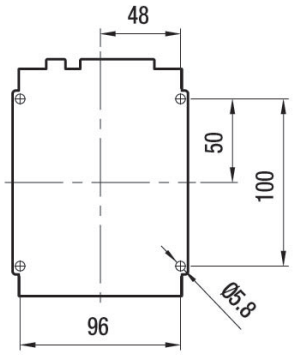

Published on 30 May 2026