
LE2253503

Sprecher and Schuh L2 Cam Switch Switch Body 3 Pole Changeover with Off 25A Panel Mount

CAM SWITCHES

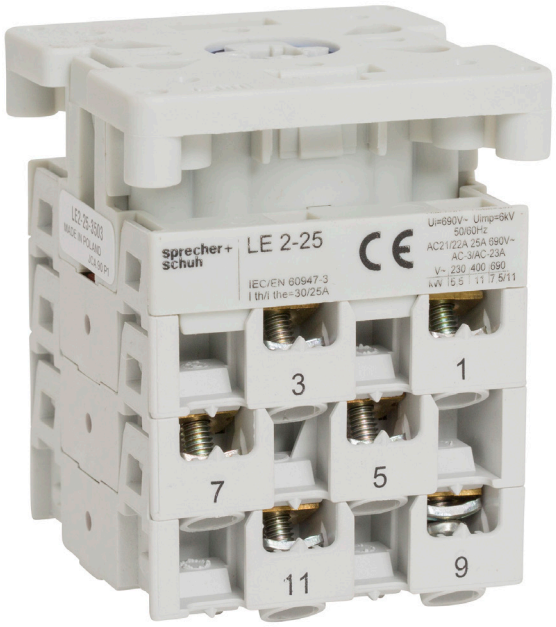

Component type	Off-load switch
Range	L2 Cam Switch
Model	N/A
Product status	Existing

The Sprecher + Schuh L2 range of rotary cam switches is designed for use in control and load switching-based applications rated up to 25A. Available in a wide range of faceplate designs, frame sizes, and switch body designs with accessories to suit various switching configurations. The modular construction allows for quick and easy assembly and installation while providing reliable operation.

ELECTRICAL	Number of poles	3
	Rated operation power at AC-3, 400 V	11 kW
	Rated operation current Ie at AC-15, 230 V	8 A
	Rated operation current Ie at AC-15, 400 V	6 A
	Rated operation current Ie at AC-22a, 690 V	25 A
	Rated operation current Ie at AC-22a, 220-500 V	25 A
	Rated operation current Ie at AC-21a, 690V	25 A
	Rated operation current Ie at AC-1, 690V	25 A
	Ithe, thermal current (enclosed)	25 A
	Ith, thermal current (open)	30 A
	Number of auxiliary contacts as normally closed contact	0
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as change-over contact	0
	Type of electrical connection of main circuit	Screw connection
CONSTRUCTION	Mounting method	Front mounting
	Material housing	Plastic
	Wire/conductor size, rigid cable	1.5-6 mm²
	Wire/conductor size, flex cable	1.5-4 mm²
	Degree of protection (IP), front side	IP20
	Suitable for front mounting	Yes
	Complete device in housing	No
MECHANICAL	With zero (off) position	Yes
	Mechanical life (service cycles)	1000000 cycles
	Number of switch positions	3

Published on 02 November 2026


LE2253503

Sprecher and Schuh L2 Cam Switch Switch Body 3 Pole Changeover with Off 25A Panel Mount

CAM SWITCHES

MECHANICAL	With retraction in 0-position	No
DIMENSIONS	Depth	69.5 mm
	Width	55 mm
	Height	55 mm
ENVIRONMENT	Operating temperature	-25…60 °C

ELECTRICAL CONNECTION DIAGRAM

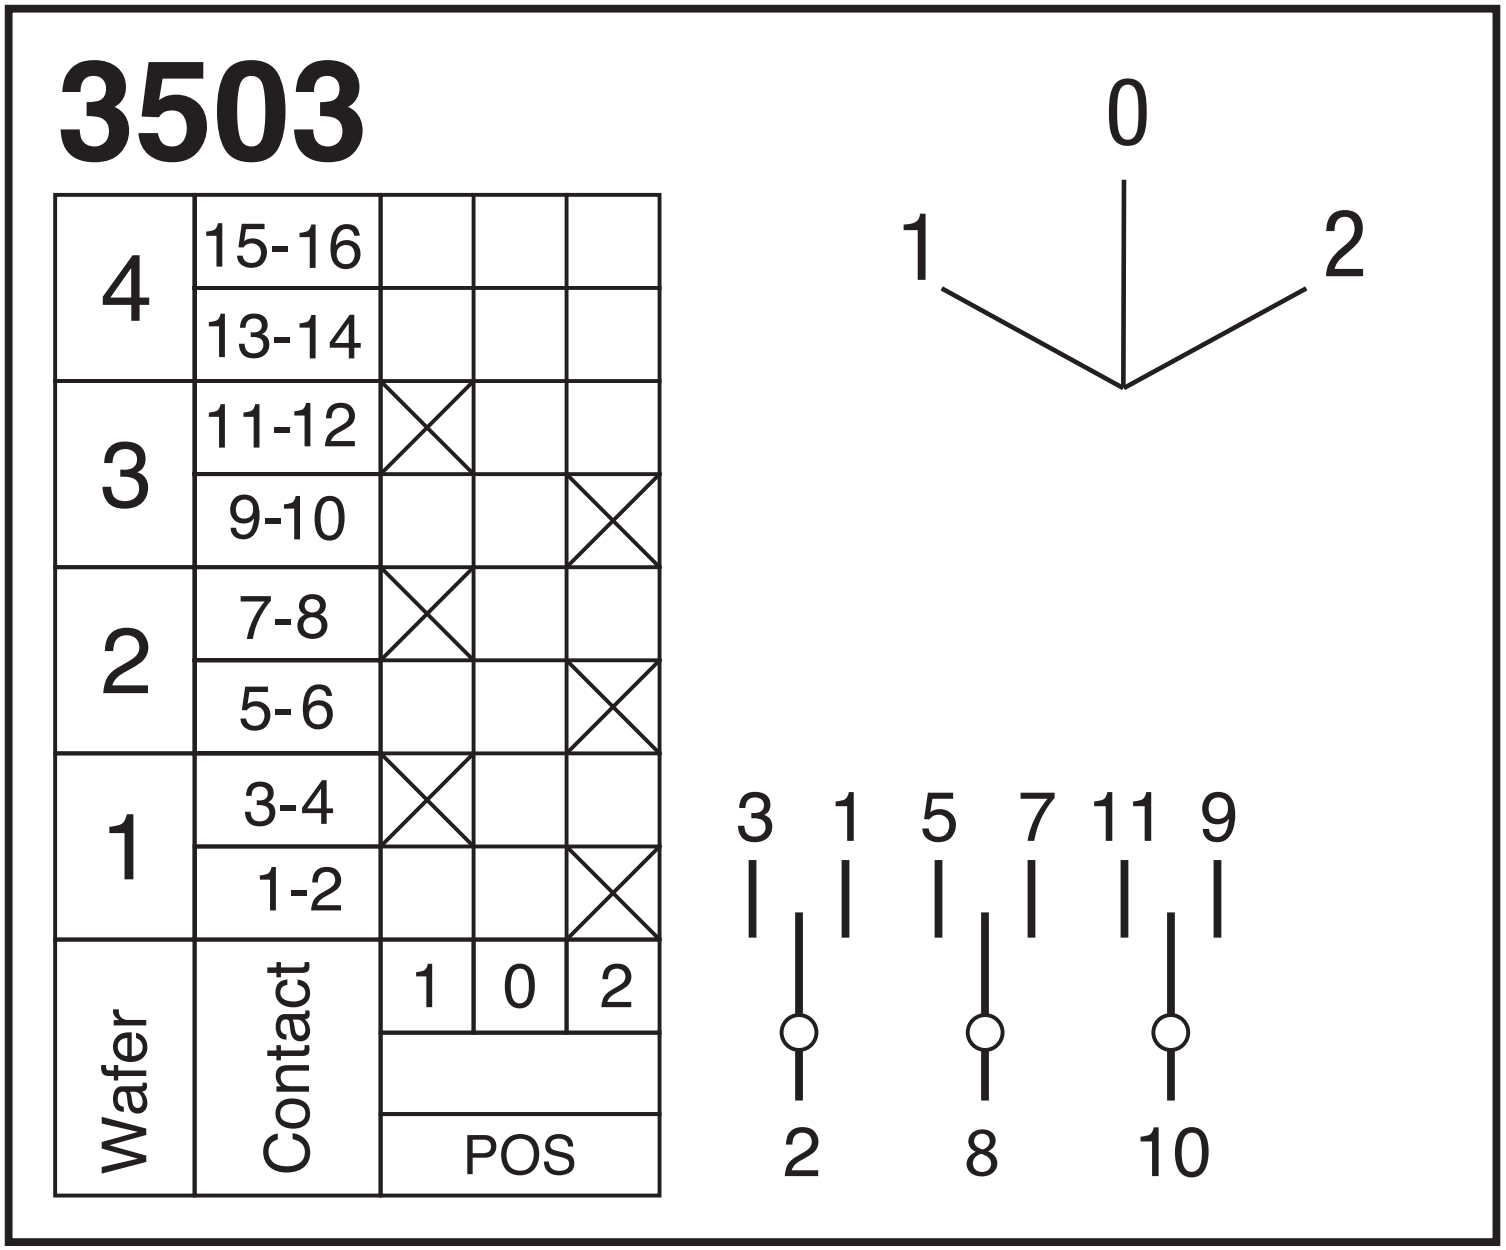

Published on 02 November 2026