
LTCS250P411250V

Microelettrica Contactor 4Pole 250VDC Coil 2NO 2NC Contact Auxiliary

ELECTRICAL ENGINEERING PRODUCTS

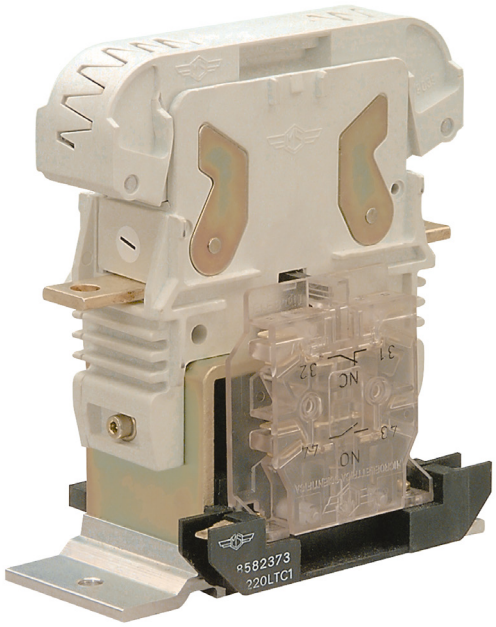

Component type	Power contactor, DC switching
Range	Contactor
Model	N/A
Product status	Existing

The Microelettrica contactors are designed for railway rolling stock and fixed applications offering high reliability and low maintenance. High performance is achieved through a strongly optimised design, ensuring a robust dimensioning of components with reduced weight and cost savings while fully containing the electric arc inside the arc-chute.

ELECTRICAL	Number of normally open contacts as main contact	4
	Max. rated current (Ith) at rated voltage DC	250 A
	Voltage type for actuating	DC
	Control supply voltage Us at DC	250 V
	Number of auxiliary contacts as normally open contact	2
	Number of auxiliary contacts as normally closed contact	2
DIMENSIONS	Height	140 mm
	Width	199.5 mm
	Depth	156 mm
	Weight	5.5 kg

Published on 24 June 2026