MC30

Steute Non-contact Interlocks Actuator Magnet Metal M30 for RCSI Safety Sensors

NON-CONTACT INTERLOCKS

.steute



Component type	Limit switch
Range	Non-contact Interlock
Model	N/A
Product status	Existing

Steute safety sensors safeguard sliding, hinged and removable protective doors that are required to be closed to secure operators safety. They can be retro-fitted onto existing equipment and safety sensors are used as an alternative to mechanically operated limit switches. Safe switching is ensured through the encapsulation of contacts, even in the presence of aggressive materials.

ELECTRICAL	Type of control element	Other
	Type of electric connection	None
	Rated operation current Ie at AC-15, 230 V	0 A
	Rated operation current Ie at DC-13, 230 V	0 A
	Forced opening	No
COMMUNICATION	Type of interface	None
	Type of interface for safety communication	None
CONSTRUCTION	Material housing	Metal
	Construction type housing	Other
	Coating housing	Nickel-plated
	Alignment of the control element	Other
	Suitable for safety functions	Yes
MECHANICAL	Switching function latching	No
	With status indication	No
DIMENSIONS	Length of sensor	16 mm
	Diameter sensor	30 mm
ENVIRONMENT	Rated temperature	-40…60 °C
CERTIFICATES/APPROVALS	Explosion safety category for gas	Other
	Explosion safety category for dust	Other

Published on 19 May 2026


MC30

Steute Non-contact Interlocks Actuator Magnet Metal M30 for RCSI Safety Sensors

NON-CONTACT INTERLOCKS

.steute

DIMENSIONAL DIAGRAM

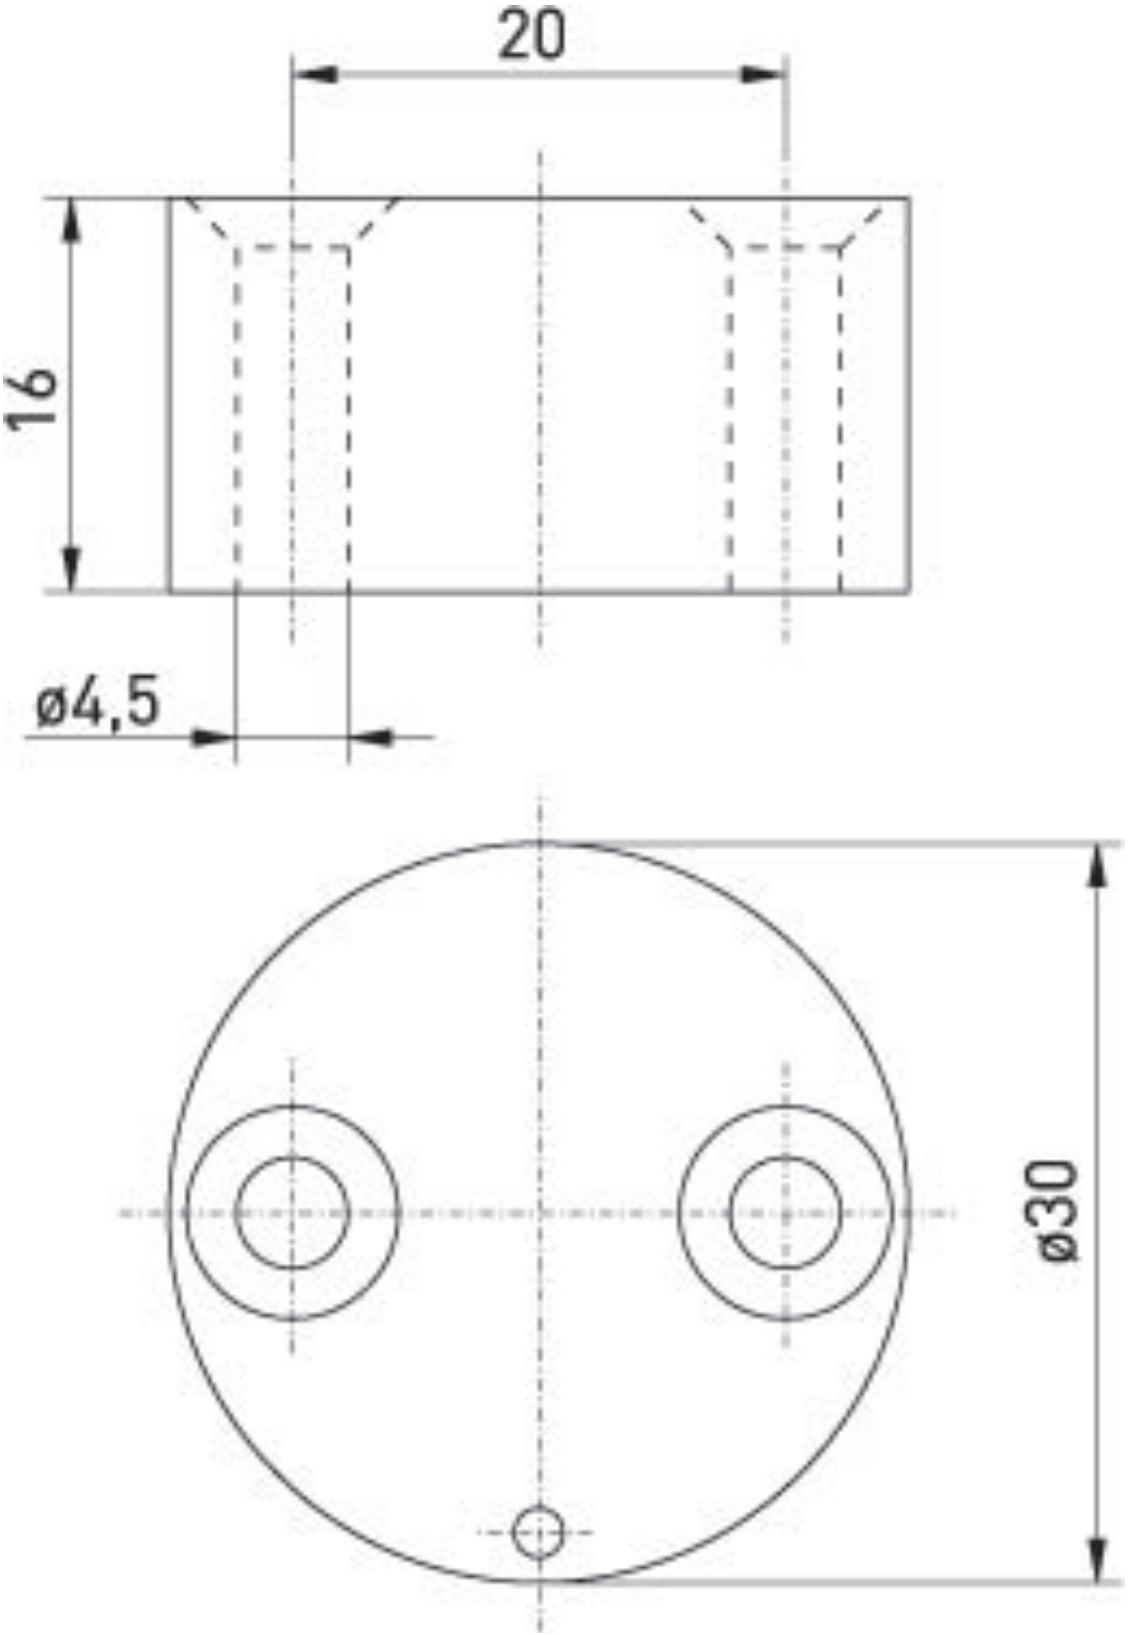


Published on 19 May 2026


MC30

Steute Non-contact Interlocks Actuator Magnet Metal M30 for RCSI Safety Sensors

NON-CONTACT INTERLOCKS

.steute

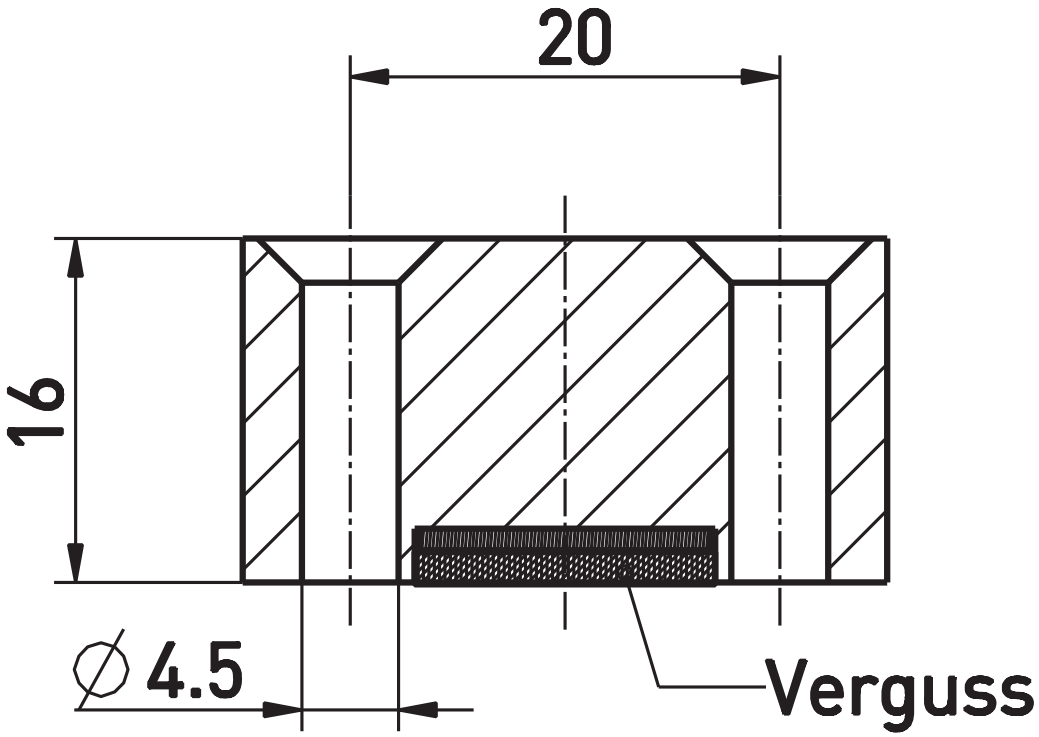

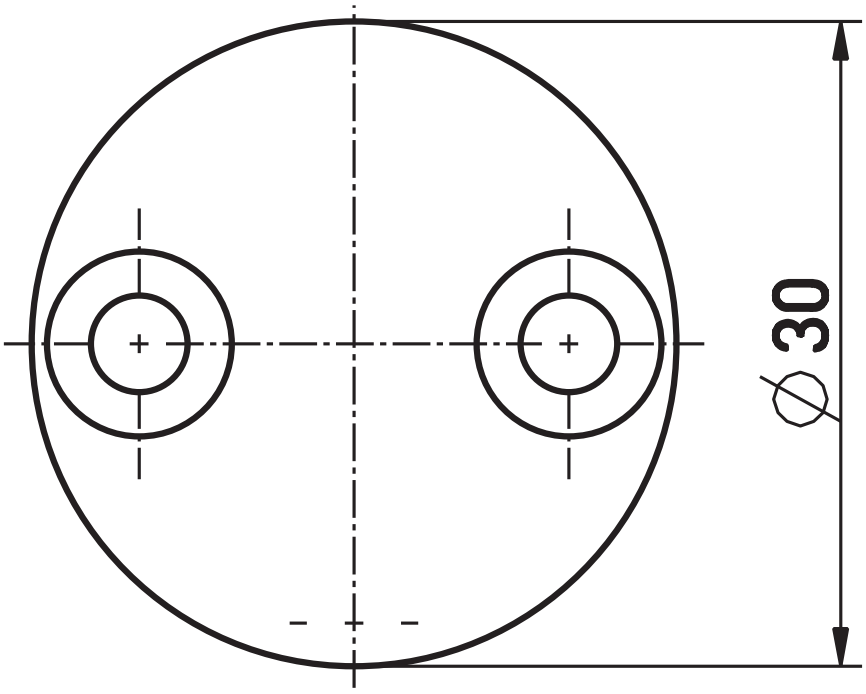

Published on 19 May 2026