PBLWEM35LMDALI

Stanilite Single Point Platinum Batten IP65 1200mm 3500 Lumens Maintained DALI

Stanilite®



Component type	Emergency luminaire
Range	Single Point Platinum Batten
Model	N/A
Product status	Existing

The Stanilite single point platinum batten range features larger terminals for faster installation, efficient lithium power and retrofittable to previous T8 profile installations.

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	30.5 W
	Nominal operation time	75000 h
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall/ceiling/suspension
	With pictogram	No
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	Grey
	Material cover	Polycarbonate (PC)
	IP rating	IP65
MECHANICAL	Impact strength	IK08
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D80
	Photometric classification	D63
	Dimmable	Yes
DIMENSIONS	Width	140 mm
	Height/depth	90 mm
	Length	1260 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes
	Compliant to AS/NZS 2293.3:2018	Yes

Published on 17 April 2026


PBLWEM35LMDALI

Stanilite Single Point Platinum Batten IP65 1200mm 3500 Lumens Maintained DALI

Stanilite®

CERTIFICATES/APPROVALS		
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

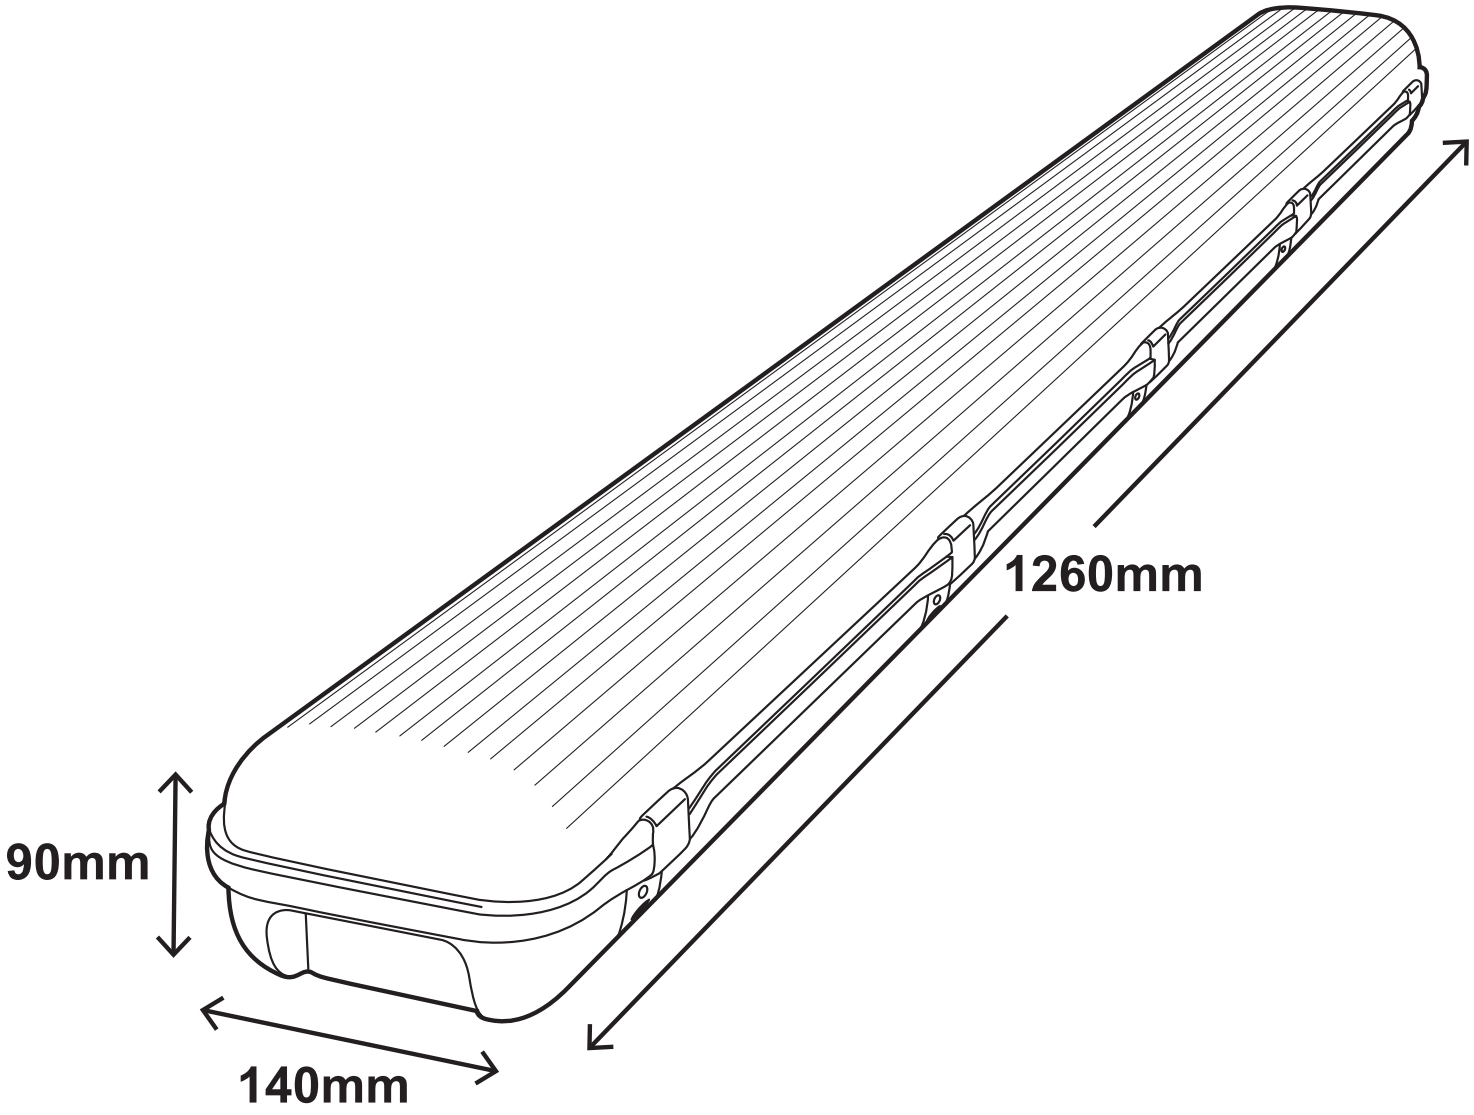

RELATED PRODUCTS

ACCESSORY



Item No: 0301307P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 Side By Side Bracket 2C 6.4V 3.2Ah 3WR



Item No: 26PBMD001

Required: No

Description: Stanilite Emergency Accessories Wall Mount Bracket Pair 45 Degree

Published on 17 April 2026