PEJLWRF1

Stanilite Nexus RF Platinum Exit Lighting LED Jumbo Weather Proof Pictograph



Component type	Emergency luminaire
Range	Nexus RF Platinum Exit Lighting
Model	N/A
Product status	Existing

The Stanilite NexusRF Platinum exit lighting range features energy saving LED light source, efficient lithium power and is fully retrofittable to previous generations of Quickfits.

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	9 W
	Viewing distance	40 m
	Nominal operation time	100000 h
	Driver type	LED
COMMUNICATION	Monitoring equipment	Radio frequency (RF)
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall surface mounted
	With pictogram	Yes
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	Grey
	Material cover	Polycarbonate (PC)
	IP rating	IP67
MECHANICAL	Impact strength	IK09
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D6.3
	Photometric classification	C2
DIMENSIONS	Width	130 mm
	Height/depth	280 mm
	Length	558 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes


Published on 17 April 2026

PEJLWRF1

Stanilite Nexus RF Platinum Exit Lighting LED Jumbo Weather Proof Pictograph

CERTIFICATES/APPROVALS	Compliant to AS/NZS 2293.3:2018	Yes
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

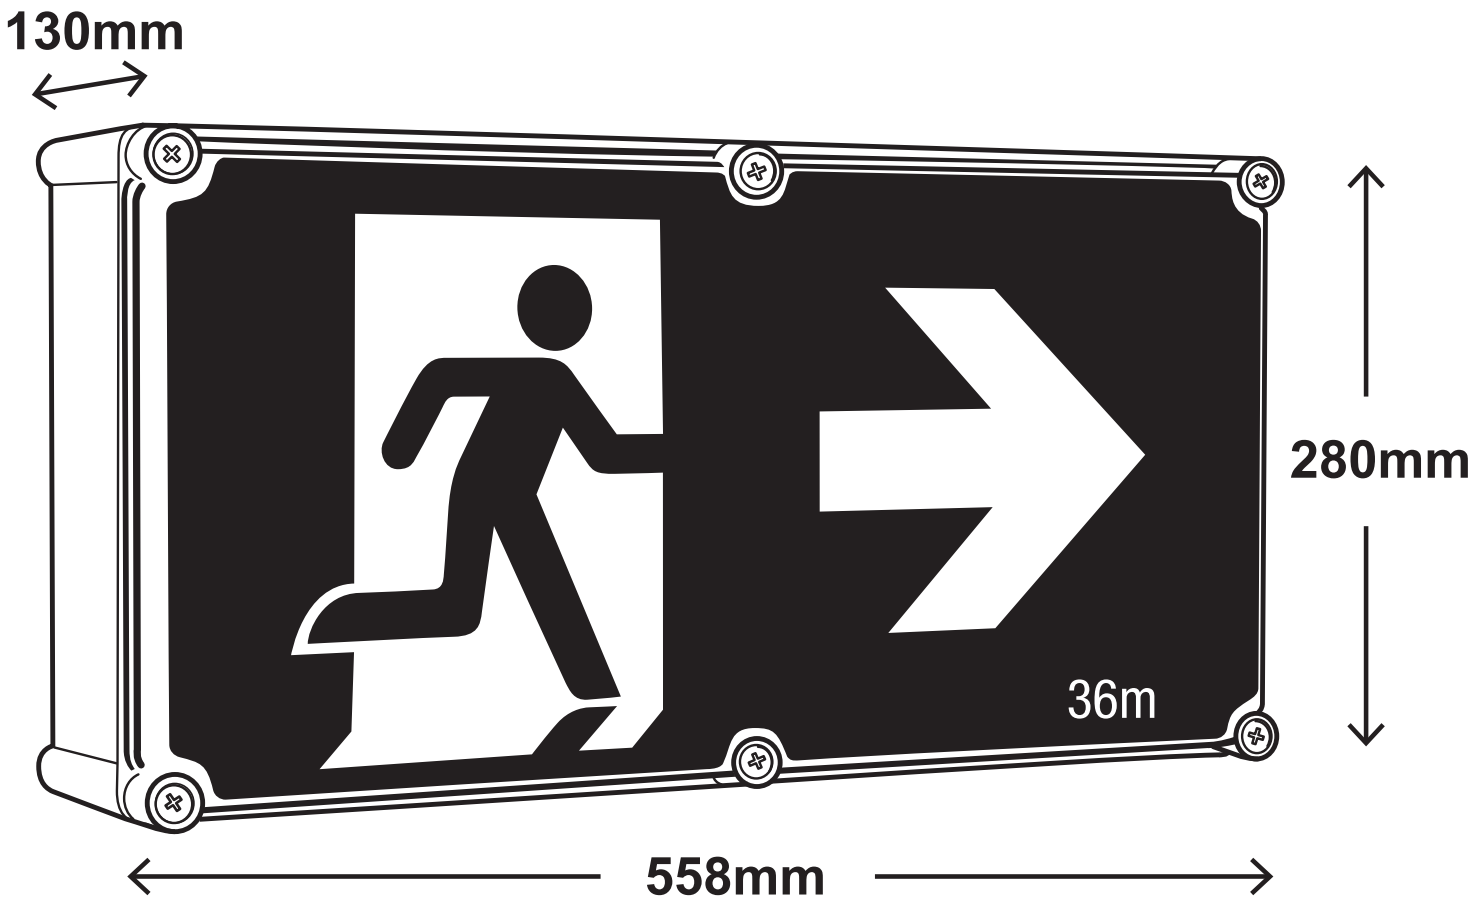

RELATED PRODUCTS

ACCESSORY



Item No: 0301307P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 Side By Side Bracket 2C 6.4V 3.2Ah 3WR

Item No: 31PWJE1

Required: No

Description: Stanilite Emergency Diffuser Jumbo Weather Proof 36W Picto including Lid

Published on 17 April 2026