PLRNRFLEDP

Stanilite Nexus RF Platinum Exit Lighting LED Edgelit Recessed Pictograph



Component type	Emergency luminaire
Range	Nexus RF Platinum Exit Lighting
Model	N/A
Product status	Existing

The Stanilite NexusRF Platinum exit lighting range features energy saving LED light source, efficient lithium power and is fully retrofittable to previous generations of Quickfits.

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	2.4 W
	Viewing distance	24 m
	Nominal operation time	100000 h
	Driver type	LED
COMMUNICATION	Monitoring equipment	Radio frequency (RF)
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Recessed
	With pictogram	Yes
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	White
	Material cover	Plastic
	IP rating	IP20
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D2
	Photometric classification	E1.6
DIMENSIONS	Width	120 mm
	Height/depth	164 mm
	Length	370 mm
	Length of cutout	348 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes

Published on 17 April 2026


PLRNRFLEDP

Stanilite Nexus RF Platinum Exit Lighting LED Edgelit Recessed Pictograph

Stanilite®

CERTIFICATES/APPROVALS	**Compliant to AS/NZS 2293.3:2018**	Yes
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

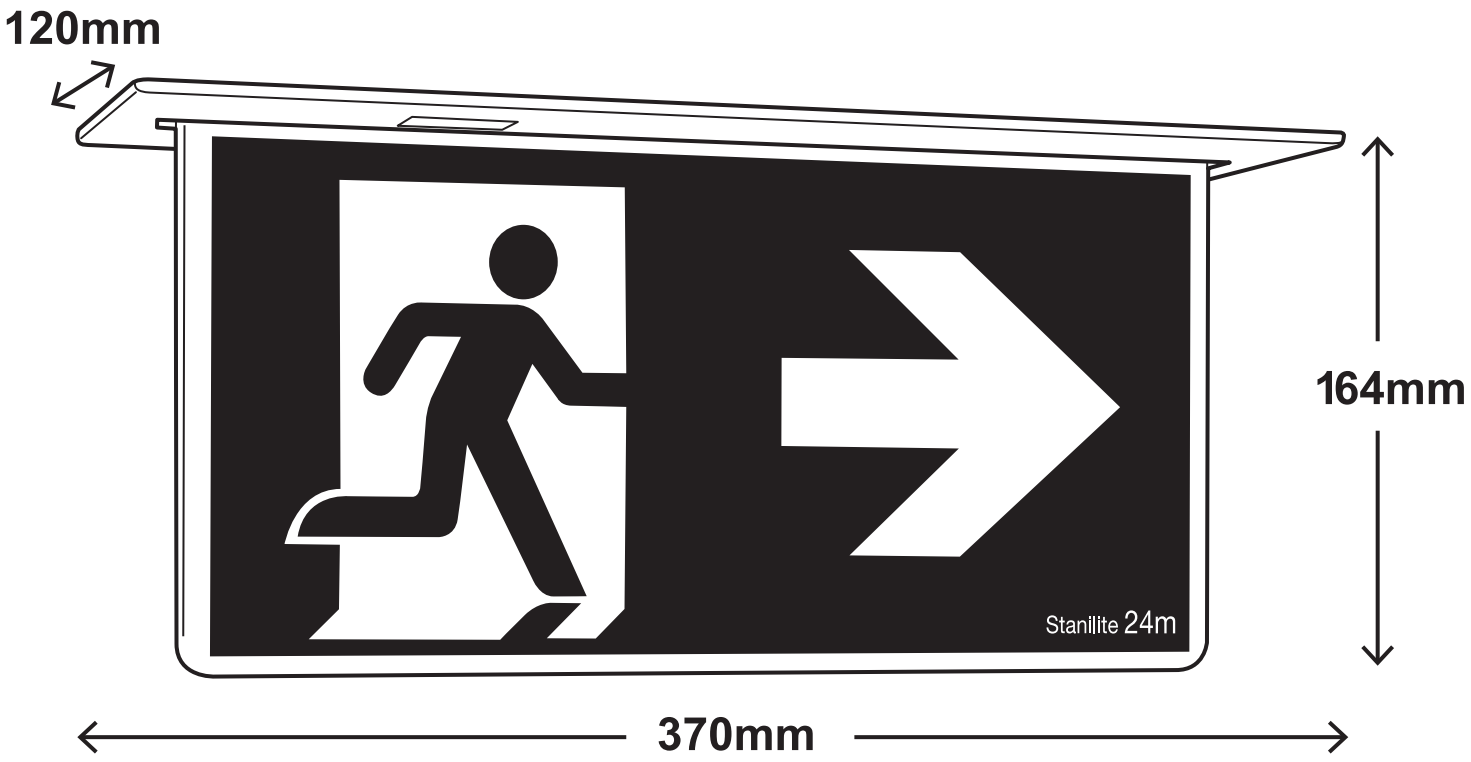

RELATED PRODUCTS

ACCESSORY



Item No: 0301304P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 3.2V 1.5Ah

Item No: PLRLEDADAPTOR

Required: No

Description: Stanilite Single Point Platinum Exit Lighting Adaptor kit PLRO Cover Plate

Item No: 29PLRINSPK

Required: No

Description: Stanilite Emergency Diffuser Picto Insert Pack Legend LED Square

Published on 17 April 2026