RD3AF14

IME Earth Leakage Relay DIN Mount 2Pole 1 Changeover Contact 240V AC



Component type	Residual current monitoring relay
Range	Earth Leakage Relay
Model	N/A
Product status	Existing

NHP's IME Earth Leakage Relays offer an efficient, reliable solution for earth leakage protection in industrial and mining applications. Easy mounting solutions on either DIN rail or panel mount and a wide range of features ensure long-lasting and reliable performance.


ELECTRICAL	Voltage type for actuating	AC
	Rated control supply voltage Us at AC 60HZ	204-264 V
	Rated frequency	47-63 Hz
	Number of contacts as change-over contact	1
	Rated burden	2.5 VA
	Rated voltage	204-264 V
	Type of electric connection	Screw connection
	Adjustable current range	0.03-30 A
	Max. permitted delay-on energization time	5 s
	Power consumption	2 W
	Reset function automatic	Yes
	Transformer connection	Yes
CONSTRUCTION	With alarm function	Yes
	Mounting method	DIN rail
	Housing material	Polycarbonate (PC)
	Degree of protection (IP), rear side	IP20
DIMENSIONS	Width	35 mm
	Height	89 mm
	Depth	65.6 mm
ENVIRONMENT	Operating temperature	-10…55 °C

Published on 16 July 2025

RD3AF14

IME Earth Leakage Relay DIN Mount 2Pole 1 Changeover Contact 240V AC

DIMENSIONAL DIAGRAM

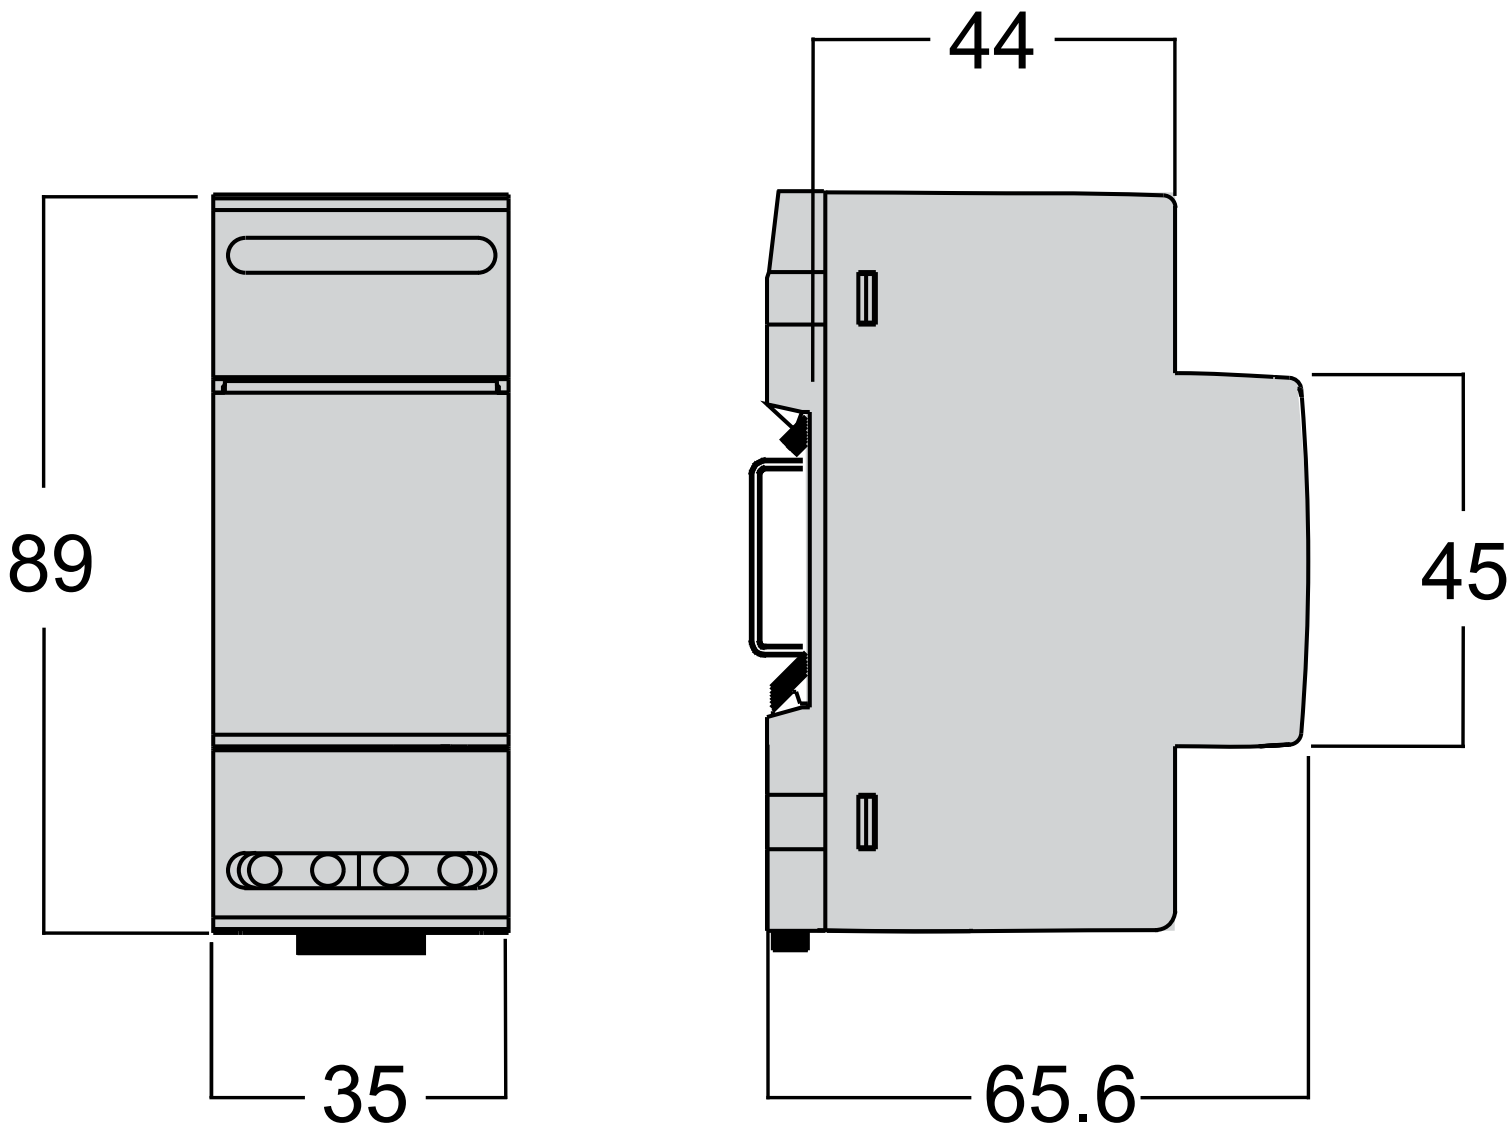

Published on 16 July 2025