


SLB32004P

Socomec SLB Load Break Switch kit, w/ External Handle, 4P
3200A



LOAD BREAK SWITCHES

socomec
Innovative Power Solutions

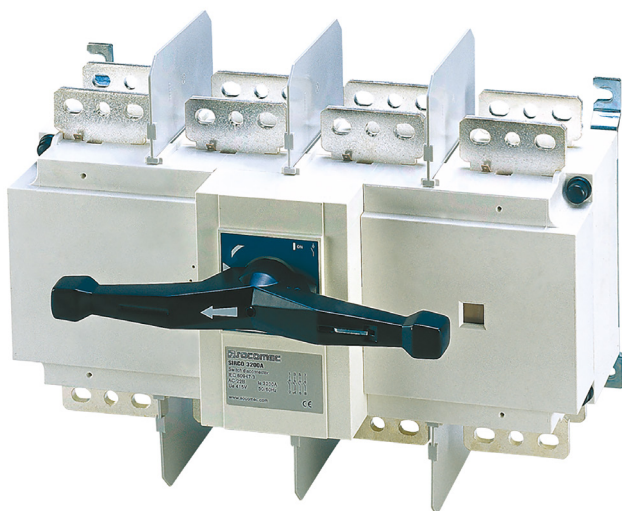

Component type	Switch disconnecter
Range	SLB
Model	N/A
Product status	Existing

Compact switching solutions from 125A up to 5000A, the SLB range of load break switches are a proven, reliable design. Severe load duty categories (AC-22 and AC-23) are well suited to the arduous switching of motors, main switch isolation and disconnection of other loads.

ELECTRICAL

Max. rated operation voltage Ue AC	12000 V
Rated permanent current at AC-21, 400 V	3200 A
Rated uninterrupted current Iu	3200 A
Number of poles	4
Rated operation power at AC-23, 400 V	710 kW
Rated operation current Ie at AC-23a, 400 V	1600 A
Rated operation current Ie at AC-23a, 500 V	1000 A
Rated operation current Ie at AC-23a, 690 V	800 A
Rated operation current Ie at DC-23, 220 V	1250 A
Rated operation current Ie at DC-23a, 500 V	1250 A
Rated short-time withstand current Icw	110 kA
Rated insulation voltage Ui	1000 V
Rated impulse withstand voltage Uimp	12 kV
Type of control element	Long turning handle
Rated permanent current at AC-23, 400 V	1600 A
Number of auxiliary contacts as normally closed contact	0
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as change-over contact	0
Degree of protection (IP), front side	IP65
Version as main switch	Yes
Version as reversing switch	No
Number of switches	1
Suitable for front mounting 4-hole	No
Suitable for front mounting centre	No

CONSTRUCTION

SLB32004P

Socomec SLB Load Break Switch kit, w/ External Handle, 4P
3200A



LOAD BREAK SWITCHES

socomec
Innovative Power Solutions

CONSTRUCTION

Suitable for distribution board installation	Yes
Suitable for intermediate mounting	No
Interlockable	No

MECHANICAL



Padlock locking	Yes
-----------------	-----

DIMENSIONS


Height	235 mm
Width	492 mm
Depth	110 mm

DIMENSIONAL DIAGRAM

Direct front operation

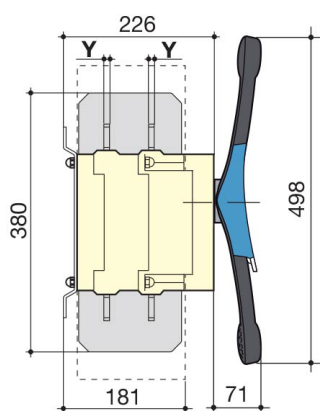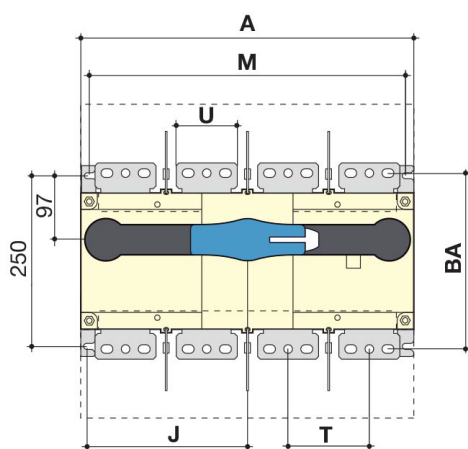

External front operation

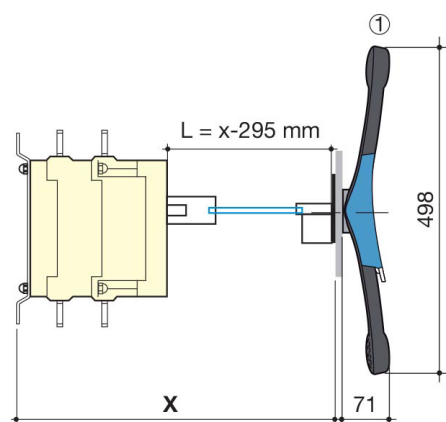

1. Double lever S5 type handle

Rating (A) SIRCO	SIRCO AC rating (A)	Overall dimensions		Switch body		Switch mounting		Connection			
		A 3p.	A 4p.	J 3p.	J 4p.	M 3p.	M 4p.	T	U	Y	BA
2000...3200	2000	372	492	173.5	233.5	347	367	120	90	8	258