
SSFBS2502P

Socomec SSF Fuse Switch Kit, with External Handle, suits BS fuses, 2P 250A

BS FUSE HOLDERS AND SWITCHES

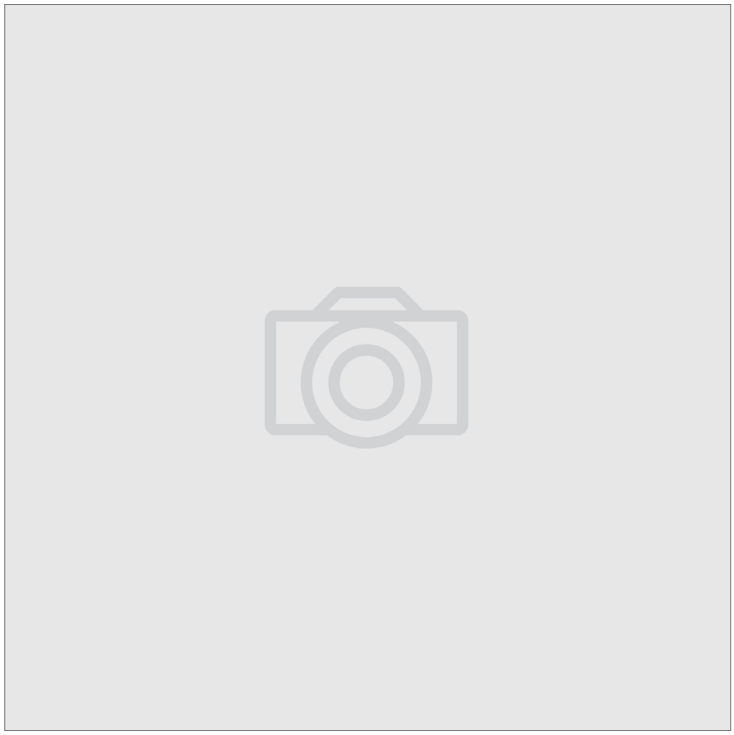

Component type	Fuse switch disconnector
Range	Fuse Switch
Model	N/A
Product status	Phased Out

The Socomec SSF standard fuse switches boast IP 30 protection on all fuse terminals in a compact yet effective design. These fuse switches feature a test position and double-break contacts per phase, allowing the safe isolation of AC or DC circuits as well as the added short circuit protection offered by DIN/BS type HRC fuses.

ELECTRICAL	Rated current	250 A
	Max. rated operation voltage Ue AC	690 V
	Max. rated operation voltage Ue DC	440 V
	Rated permanent current at AC-21, 400 V	250 A
	Rated permanent current at AC-23, 400 V	250 A
	Rated operation current Ie at DC-21, 220 V	250 A
	Rated operation current Ie at DC-21, 440 V	250 A
	Rated operation current Ie at DC-22, 220 V	250 A
	Rated operation current Ie at DC-22, 440 V	250 A
	Rated operation current Ie at DC-23, 440 V	200 A
	Short time withstand current Icw, 1 sec	80 kA
	Rated impulse withstand voltage Uimp	8 kV
	Rated insulation voltage Ui	750 V
	Rated operation power at AC-23, 400 V	132 kW
CONSTRUCTION	Degree of protection (IP), front side	IP30
MECHANICAL	Suitable for fuses	Other
	Mechanical life (service cycles)	10000 cycles

Published on 21 July 2026