
SSPC77P5240VAC

S+S SPC Soft Starter Enclosed 3 Wire 7.5kW 240VAC

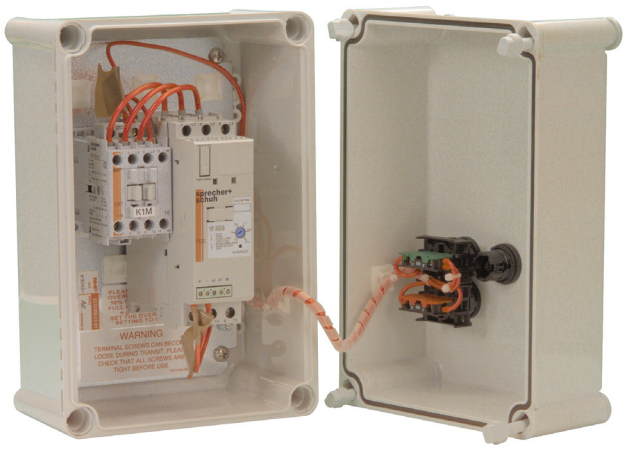

Component type	Motor starter/Motor starter combination
Range	Soft Starter
Model	N/A
Product status	Existing

The Sprecher + Schuh PCS Softstarter Controller is specifically designed to start 3-phase motors (up to 460V / 575V), in a compact, easy to use and DIN-rail mountable for models up to 85A.

ELECTRICAL	**Type of motor starter**	Other
	Rated operation power at AC-3, 400 V	7.5 kW
	Rated operation current Ie	16 A
	Long time overload protection adjustment range	5.3-16 A
	Release class	Adjustable
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	240 V
CONSTRUCTION	**Device construction**	Enclosed
	Material	Plastic
	IP rating	IP66
DIMENSIONS	**Depth**	180 mm
	Height	280 mm
	Width	280 mm

Published on 29 May 2026