
TA4322005A

IME TA432 Solid Core Current Transformer 200A/5A 32mm 5VA Class 1, 3VA Class 0.5

CURRENT TRANSFORMERS AND TRANSDUCERS

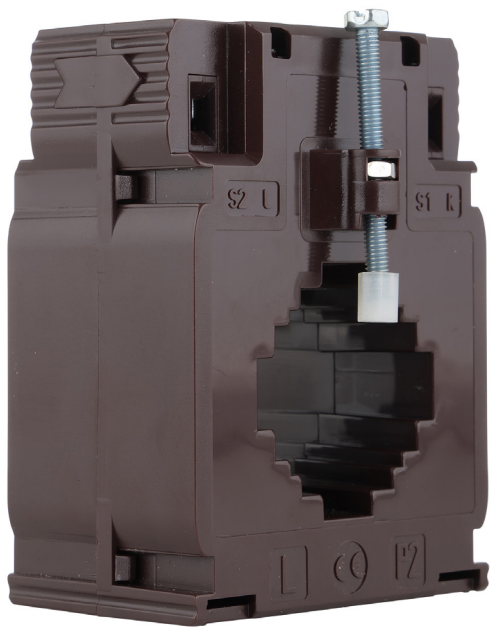

Component type	Current transformer
Range	Solid Core CT
Model	N/A
Product status	Existing

The IME solid core current transformers are highly accurate and cover a broad range of sizes and form factors that suit busbar, cable or protection class applications.

ELECTRICAL	**Primary rated current**	200 A
	Secondary current on CT	5 A
	Rated operating frequency	47-63 Hz
	Max. operating voltage (Umax)	0.72 V
	Rated short time thermal current Ith (x primary current)	12 kA
	Rated continuous thermal current Icth (x primary current)	12 kA
	Accuracy class	0.5
	Insulation class (IEC 61869-1, 61869-2)	B
	Security factor	5
	Rated burden, class 0.5	3 VA
	Rated burden, class 1	5 VA
	Power loss	9 W
	Over current limiting factor	FS 5
	Secondary rated apparent power	3 VA
	Calibrated	No
CONSTRUCTION	**Current transformer type**	Solid core
	Material housing	Polycarbonate (PC)
	Model	Through-feed current converter
	With shock protection	Yes
	Snap mounting	Yes
	Secondary connection	Screw connection
	Number of primary inputs	1
DIMENSIONS	**Opening diameter**	32 mm
ENVIRONMENT	**Storage temperature**	-40…85 °C

Published on 01 December 2025


TA4322005A


IME TA432 Solid Core Current Transformer 200A/5A 32mm 5VA Class 1, 3VA Class 0.5


CURRENT TRANSFORMERS AND TRANSDUCERS

DIMENSIONAL DIAGRAM


***Opzione / Option**

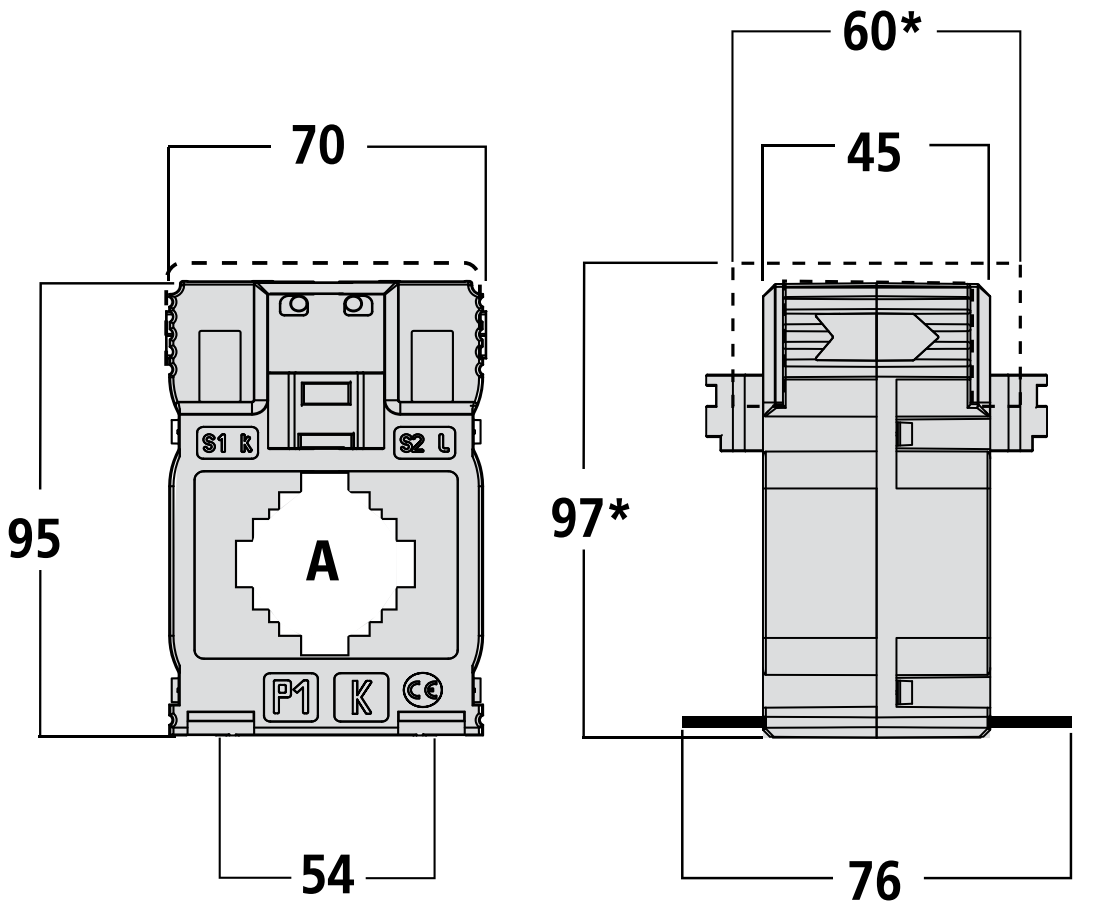

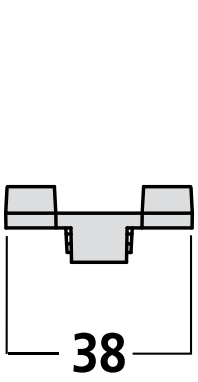



Fissaggio per binario DIN
DIN rail mounting

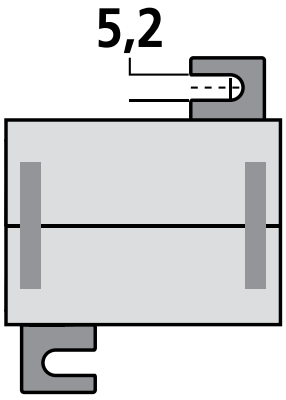

Fissaggio a vite
Screw type mounting

Published on 01 December 2025