TM8P02120

IME TM8 Programmable Transducer Input 5A Output 0 to 500V Auxiliary 115V AC

CURRENT TRANSFORMERS AND TRANSDUCERS

IME



Component type	Current transformer
Range	Programmable Transducer
Model	N/A
Alternative	CALL FOR ALTERNATIVE

ELECTRICAL	Primary rated current	5 A
	Rated operating frequency	45-65 Hz
	Accuracy class	0.5
	Power loss	4.8 W
	Calibrated	Yes
CONSTRUCTION	Material housing	Polycarbonate (PC)
	Model	Other
	With shock protection	Yes
	Number of primary inputs	1
ENVIRONMENT	Storage temperature	-25…70 °C


Published on 16 February 2026

TM8P02120

IME TM8 Programmable Transducer Input 5A Output 0 to 500V Auxiliary 115V AC

CURRENT TRANSFORMERS AND TRANSDUCERS

DIMENSIONAL DIAGRAM

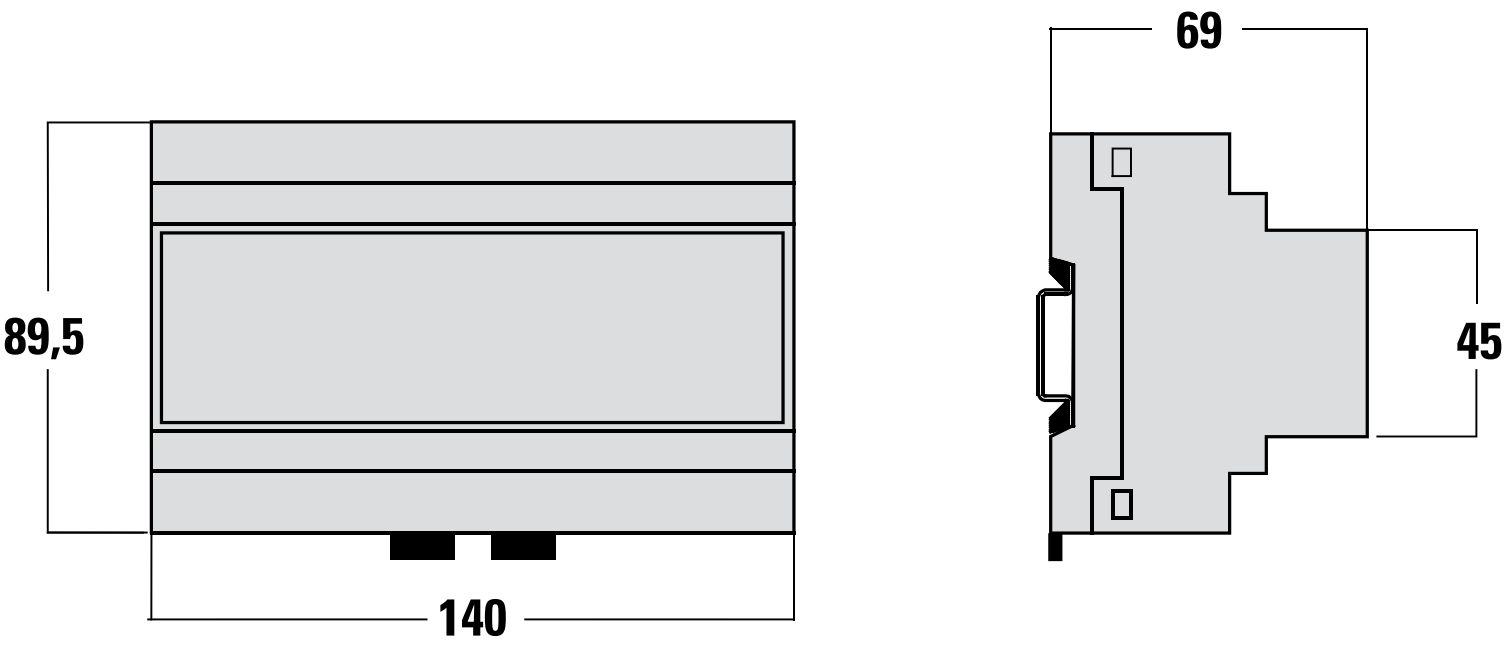

Published on 16 February 2026