
X4DE470

PROCONECT 3PX4 Socket Outlet, 3P+N+E+2p, 250A, suits 70mm2 w/ Crimp Terminals

HIGH CURRENT PLUGS

PROCONECT®

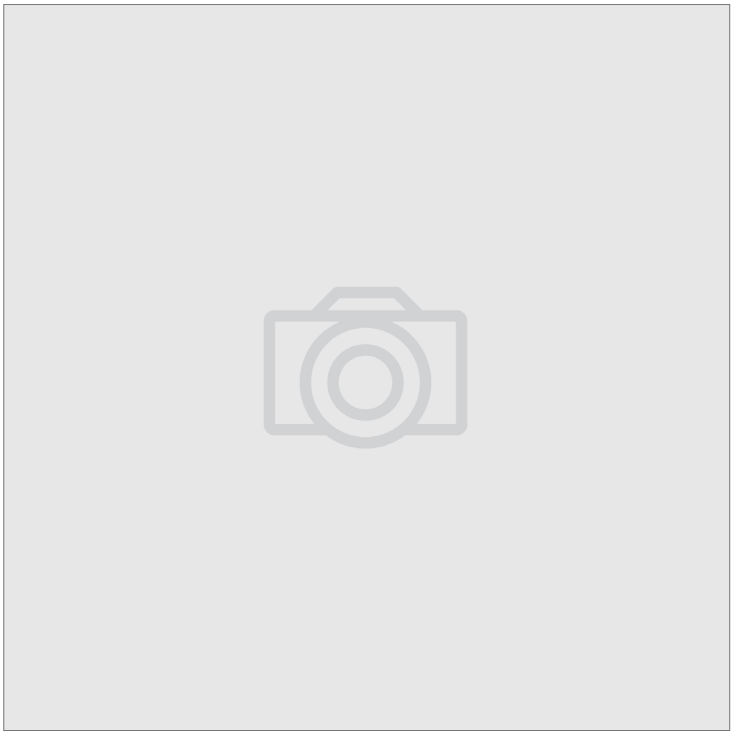

Component type	Round socket/plug for high currents
Range	3PX/3PV
Model	N/A
Product status	Existing

The Proconect 3PX and 3PV range of high-current plugs and sockets suit a variety of industries including mining, marine, transportation, and commercial. Available in either a screw ring (3PV) or push-pull connection (3PX) type. Current ratings of 160A to 660A (at 3.3 kV) and corrosion-proof aluminium construction make it ideal for the harsh Australian environment.

ELECTRICAL	Amperage	250 A
	Voltage	1-3300 V
	Contact configuration	3P+N+E+2P
CONSTRUCTION	Construction type	Outlet
	Material insulation body	Other
	IP rating	IP67
DIMENSIONS	Width	144 mm
	Length	54 mm
	Height	134 mm
	Weight	2.2 kg
ENVIRONMENT	Operating temperature	-30…60 °C

Published on 11 September 2026


X4DE470


PROCONECT 3PX4 Socket Outlet, 3P+N+E+2p, 250A, suits 70mm2 w/ Crimp Terminals

HIGH CURRENT PLUGS

PROCONECT®

DIMENSIONAL DIAGRAM

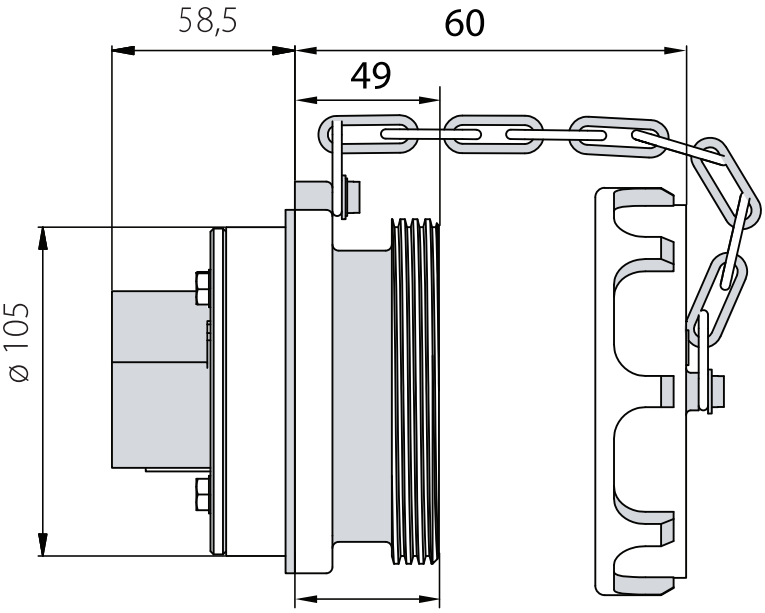

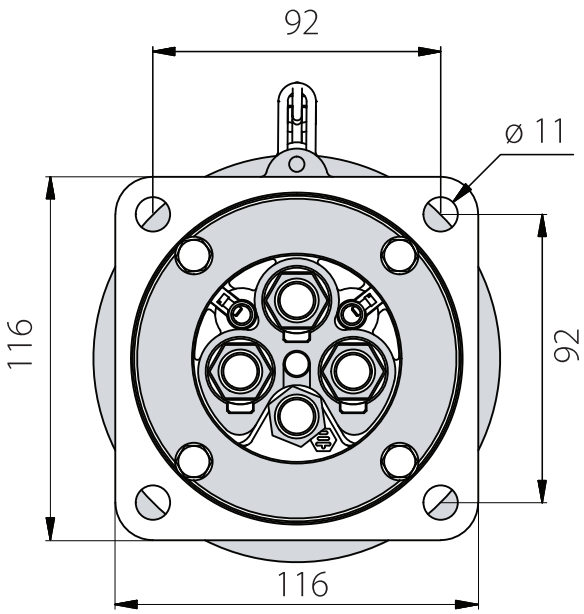

Published on 11 September 2026