100C60KJ10

Allen-Bradley 100C Contactor 30kW 3Pole 24VAC 50 and 60Hz Coil 1NO Contact Auxiliary

CONTACTORS

NHP | Allen-Bradley



Component type	Power contactor, AC switching
Range	100C
Model	N/A
Product status	Existing

The Allen-Bradley 100-C contactor line offers compact, high-performance design in 9 to 97 A contactors. These energy efficient contactors are designed to control motors and other loads. Straightforward wiring and installation process ensure quick and easy setup, reducing downtime and increasing productivity.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-3, 400 V	60 A
	Rated operation power at AC-3, 400 V	32 kW
	Rated operation current Ie at AC-1, 400 V	100 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	24 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	0
	Rated operation current Ie at AC-3, 690 V	34 A
	Rated operation power at AC-3, 690 V	32 kW
	Rated operation power at AC-4, 400 V	13 kW
	Control supply voltage Us at AC 60HZ	24 V
	Power consumption, AC coil pickup	235 VA
	Power consumption, AC coil hold-in	19.6 VA
	Type of electrical connection of main circuit	Screw connection
	Rated operation current Ie at AC-4, 400 V	25.5 A
CONSTRUCTION	IP rating	IP20
	Mounting method	Screw mounting
DIMENSIONS	Height	122 mm
	Width	81 mm
	Depth	125.5 mm
	Weight	1.47 kg


Published on 29 October 2026


100C60KJ10

Allen-Bradley 100C Contactor 30kW 3Pole 24VAC 50 and 60Hz Coil 1NO Contact Auxiliary

CONTACTORS

DIMENSIONAL DIAGRAM

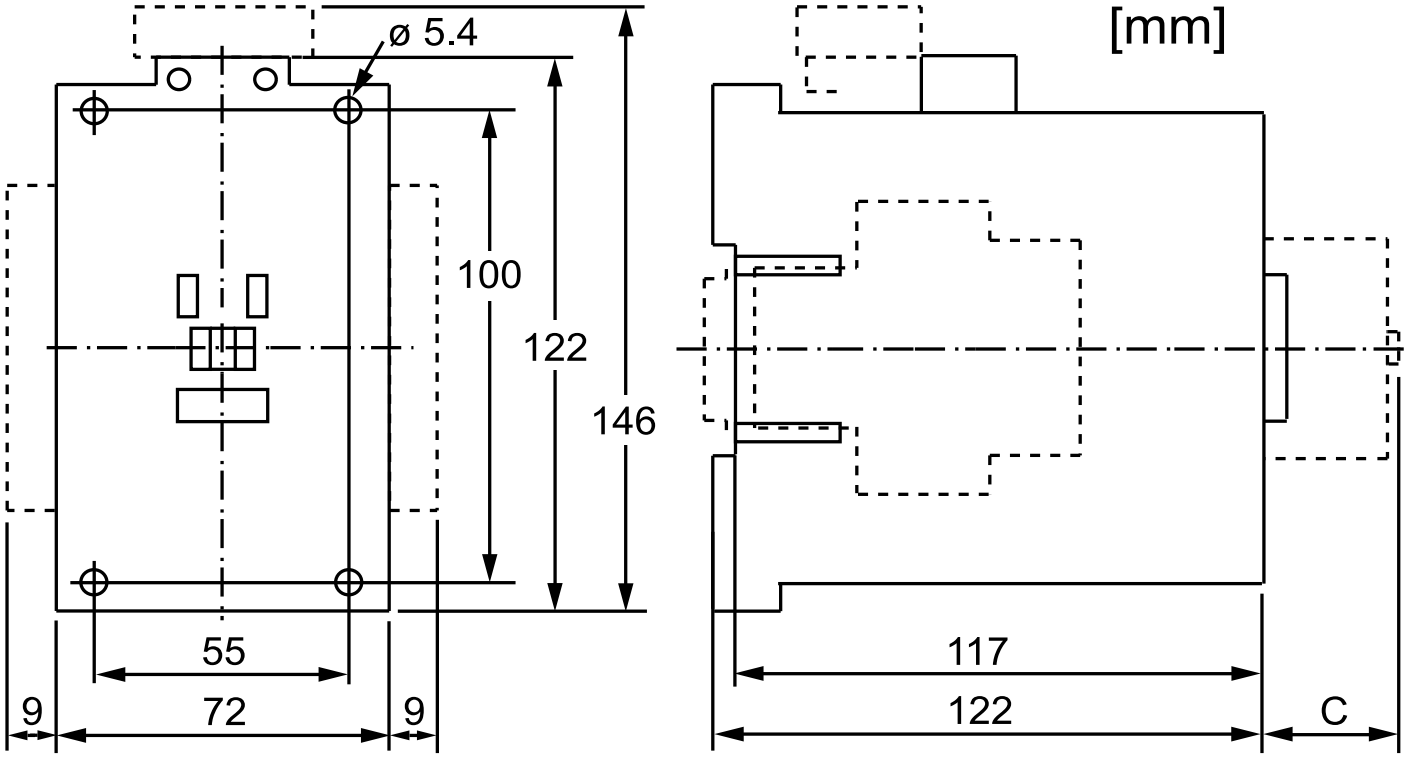



C [mm]

Published on 29 October 2026