100K05DJ300

Allen-Bradley 100K Contactor Mini 2.2kW 4Pole 24VDC Coil with Diode 3NO 1NC Contacts Auxiliary

CONTACTORS



Component type	Power contactor, AC switching
Range	100K
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 100-K miniature contactors are ideal for commercial and light industrial applications where panel space is at a premium. Measuring only 45 mm wide, they are shallower and have less panel depth requirements than standard IEC contactors.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	1
	Rated operation current Ie at AC-3, 400 V	4.9 A
	Rated operation power at AC-3, 400 V	2.2 kW
	Rated operation current Ie at AC-1, 400 V	20 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	DC
	Control supply voltage Us at DC	24 V
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as normally closed contact	0
	Rated operation current Ie at AC-3, 690 V	2.8 A
	Rated operation power at AC-3, 690 V	2.2 kW
	Rated operation power at AC-4, 400 V	0.55 kW
	Power consumption, DC coil pickup	3 W
	Power consumption, DC coil hold-in	3 W
	Type of electrical connection of main circuit	Screw connection
	Rated operation current Ie at AC-4, 400 V	2 A
CONSTRUCTION	IP rating	IP20
	Mounting method	DIN-rail/screw
DIMENSIONS	Height	56 mm
	Width	44.9 mm
	Depth	53 mm
	Weight	0.2 kg

Published on 14 October 2026

100K05DJ300


Allen-Bradley 100K Contactor Mini 2.2kW 4Pole 24VDC Coil with Diode 3NO 1NC Contacts Auxiliary

CONTACTORS

DIMENSIONAL DIAGRAM

100-K Miniature Contactor with 193-K Overload Relay

.

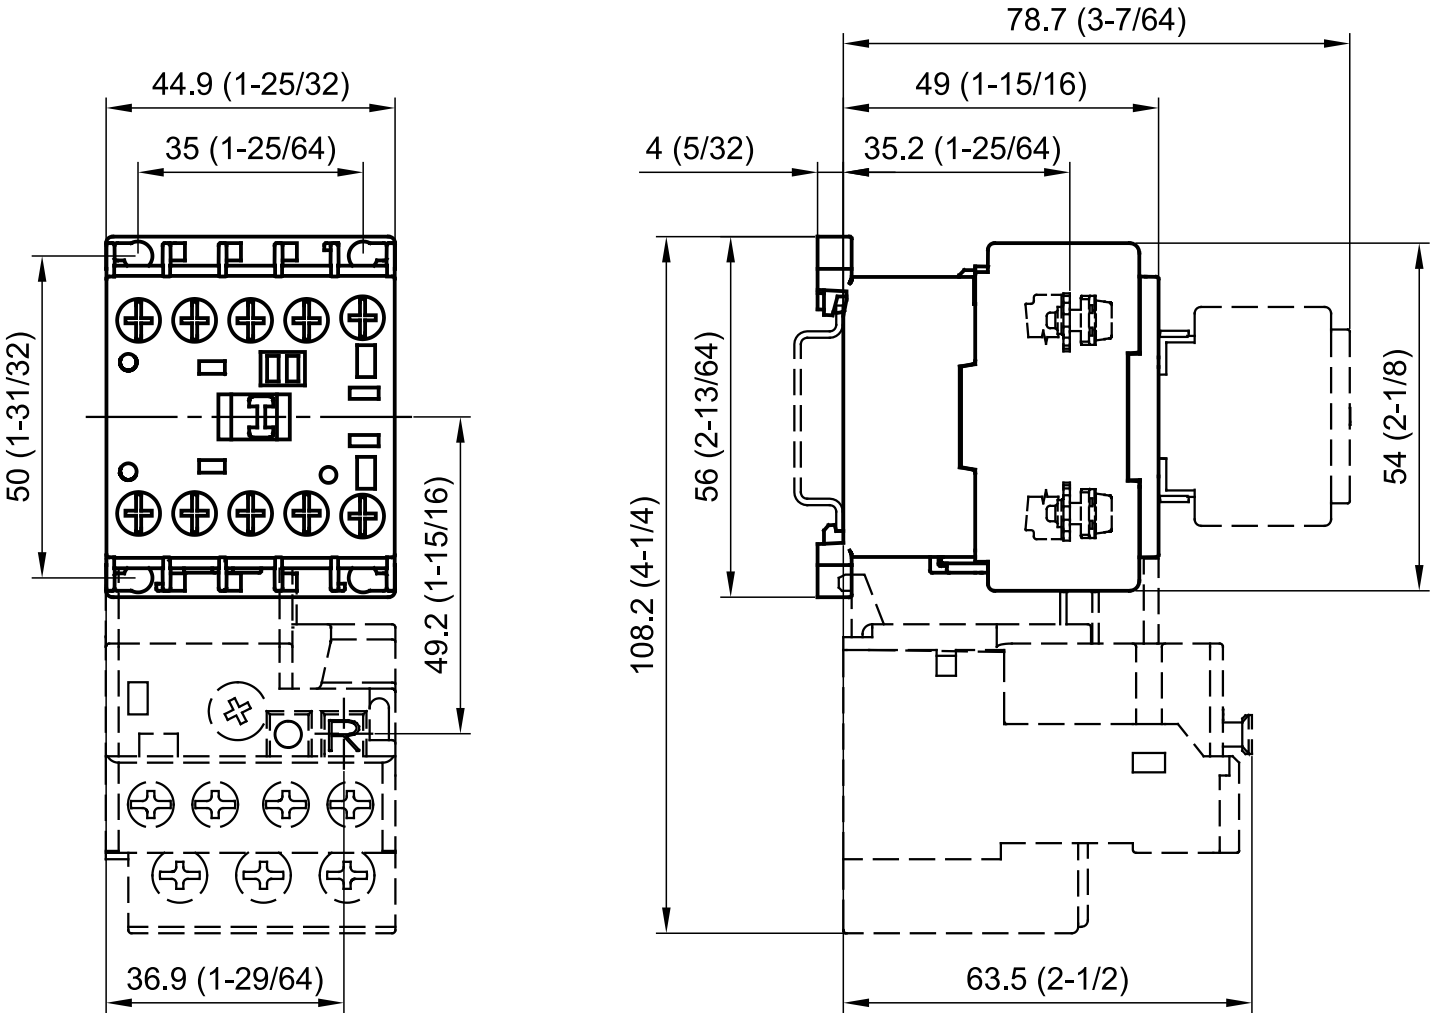

Dimensions are shown in millimeters (inches).

Published on 14 October 2026