
100SC72K14BC

Allen-Bradley 100SC Safety Contactor 37kW 3Pole 24VAC Coil 1NO 4NC Contact Auxiliary

SAFETY CONTACTORS

NHP Allen-Bradley

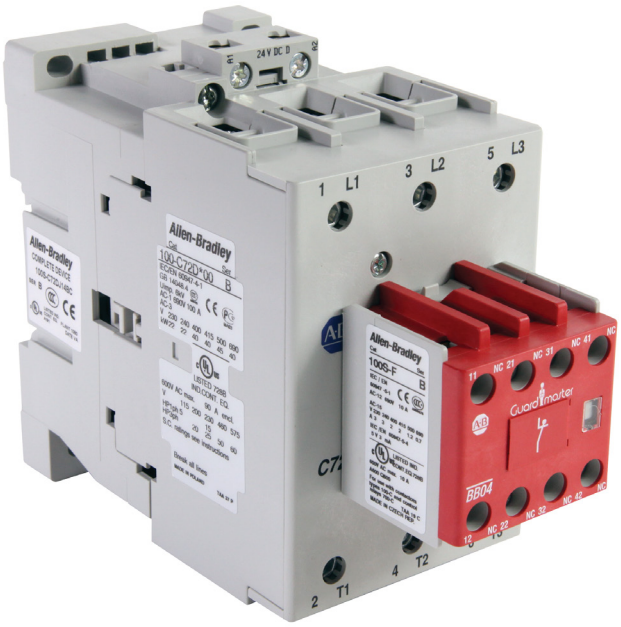

Component type	Power contactor, AC switching
Range	100SC
Model	N/A
Alternative	100SC72KJ14BC

The Allen-Bradley Bulletin 100S-C safety contactors provide mechanically linked positively guided or mirror contact performance, required in the feedback circuits of modern safety applications.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-3, 400 V	72 A
	Rated operation power at AC-3, 400 V	40 kW
	Rated operation current Ie at AC-1, 400 V	100 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	24 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	4
	Rated operation current Ie at AC-3, 690 V	42 A
	Rated operation power at AC-3, 690 V	40 kW
	Rated operation power at AC-4, 400 V	15 kW
	Control supply voltage Us at AC 60HZ	28 V
	Power consumption, AC coil pickup	235 VA
	Power consumption, AC coil hold-in	19.6 VA
	Type of electrical connection of main circuit	Screw connection
	Rated operation current Ie at AC-4, 400 V	31 A
CONSTRUCTION	IP rating	IP20
	Mounting method	Screw mounting
DIMENSIONS	Height	122 mm
	Width	81 mm
	Depth	164.5 mm
	Weight	1.53 kg

Published on 30 July 2026