140GH6C3C50

Allen-Bradley 140G MCCB H Frame 70kA 3P 50A Fixed Thermal Magnetic



Component type	Power switching circuit breaker
Range	Moulded Case Circuit Breaker
Model	N/A
Product status	Existing

The Allen Bradley motor protection circuit breakers offer a reliable solution with both short-circuit and overload protection for individual motor loads with high interrupt ratings for 2 and 3 pole devices. Ideal for motor starting and motor protection applications. Connecting modules are available and have been combination short-circuit tested with the Allen Bradley 100-E contactors.

ELECTRICAL	Rated current In	50 A
	Number of poles	3
	Max. rated operation voltage Ue AC	690 V
	Rated ultimate short-circuit breaking capacity Icu at 415 V, 50 Hz	70 kA
	Type of protection trip unit	Thermal/magnetic release
	Trip curve	Fixed thermal, fixed magnetic
	Frame size rating	160 A
	Integrated earth fault protection	No
	Rated frequency	50-60 Hz
	Rated insulation voltage Ui	1000 V
	Suitable for isolation	Yes
	Rated short circuit breaking capacity, Icu 690V AC	15 kA
	Rated short circuit breaking capacity, Ics 690V AC	15 kA
	Rated impulse withstand voltage Uimp	8 kV
	Motor drive integrated	No
	Reverse connection of supply possible	Yes
	Electrical life at Un, In (service cycles)	8000 cycles
	Complete device with protection unit	No
	Power loss	12.3 W
CONSTRUCTION	Air circuit breaker (withdrawable)	No
MECHANICAL	DIN rail (top hat rail) mounting optional	Yes
	Mechanical life (service cycles)	25000 cycles
DIMENSIONS	Height	130 mm
	Width	90 mm

Published on 13 October 2026

140GH6C3C50

Allen-Bradley 140G MCCB H Frame 70kA 3P 50A Fixed Thermal Magnetic


DIMENSIONS	Pole connection pitch	30 mm
	Built-in depth	82.5 mm
	Depth (toggle included)	116 mm
	Weight	1.2 kg
ENVIRONMENT	Rated surrounding temperature without derating	40 °C
	Maximum operating temperature	75 °C
	Storage temperature	-40…80 °C
	Max. altitude before derating	2000 m

Published on 13 October 2026

140GH6C3C50

Allen-Bradley 140G MCCB H Frame 70kA 3P 50A Fixed Thermal Magnetic

DIMENSIONAL DIAGRAM

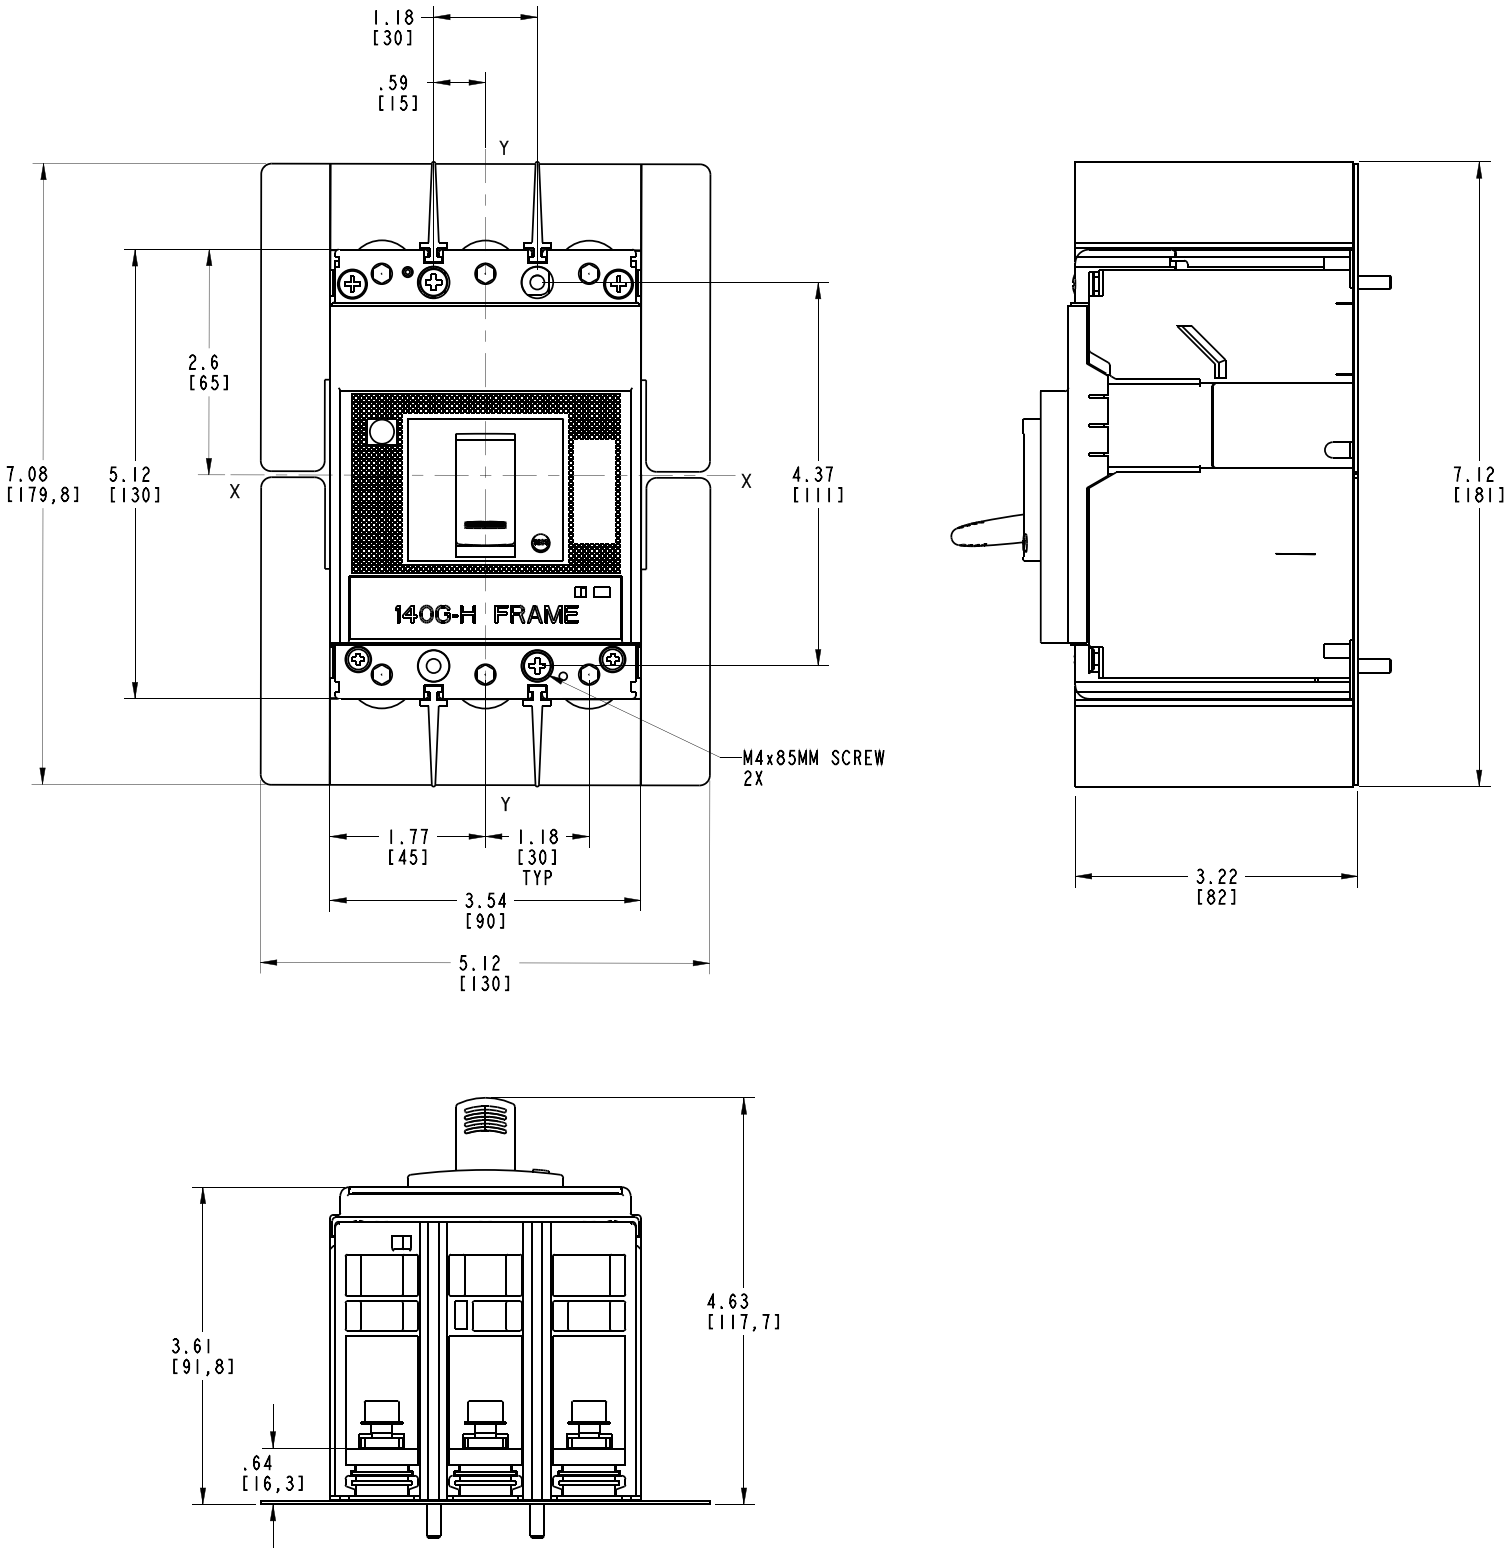

Published on 13 October 2026