140MPA3EA40

Allen-Bradley 140MP Motor Protection Circuit Breaker Frame A 0.25 to 0.4A

MOTOR PROTECTION



Component type	Motor protection circuit-breaker
Range	140MP
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 140MP Motor Protection Circuit Breakers provide magnetic short-circuit and thermal overload protection up to 32 A, with an interrupting rating 400V of up to 100 kA. Available in a range of accessories and tested in combination with Allen-Bradley Bulletin 100-C and 100-K contactors creating two-component motor starters.

ELECTRICAL	**Rated uninterrupted current Iu**	0.4 A
	Switch off technique	Thermomagnetic
	Long time overload protection adjustment range	0.25-0.4 A
	Max. rated operation voltage Ue	690 V
	Rated short-circuit breaking capacity Icu at 400 V, AC	100 kA
	Rated operation power at AC-3, 400 V	0.09 kW
	Type of control element	Turn handle
	Type of electrical connection of main circuit	Screw connection
	Number of poles	3
CONSTRUCTION	**IP rating**	IP2X
MECHANICAL	**Max. tightening torque**	2.5 Nm
DIMENSIONS	**Height**	90 mm
	Width	45 mm
	Depth	85.5 mm
	Weight	0.25 kg


Published on 02 October 2026

140MPA3EA40

Allen-Bradley 140MP Motor Protection Circuit Breaker Frame A 0.25 to 0.4A

MOTOR PROTECTION

DIMENSIONAL DIAGRAM

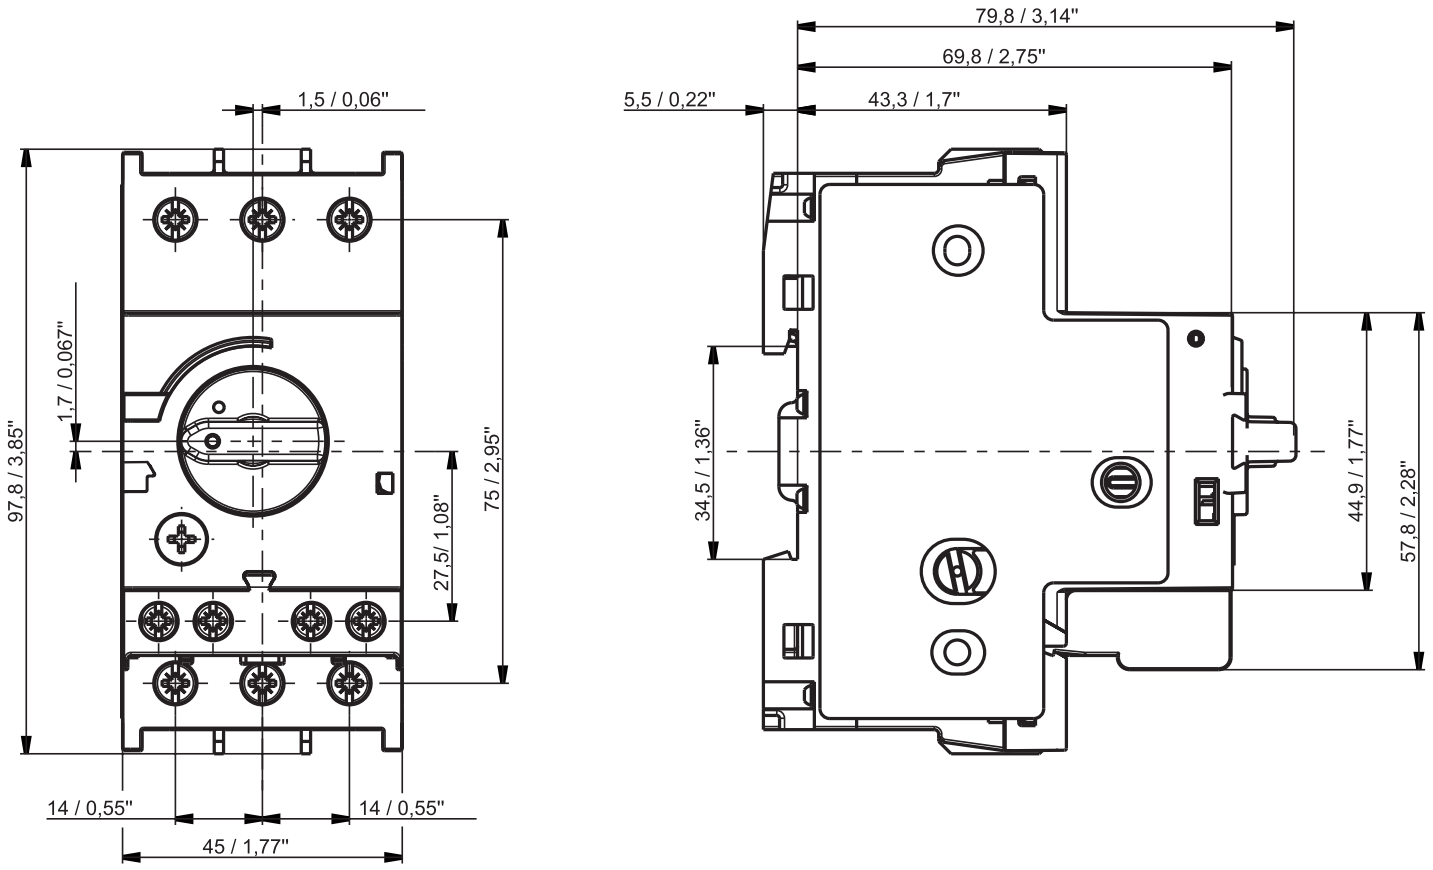

mm / inch

Published on 02 October 2026