
140MPAASA11

Allen-Bradley 140MP Auxiliary Contact with 1NO Contact and 1NC Contact Right Side Mount

MOTOR PROTECTION

NHP Allen-Bradley

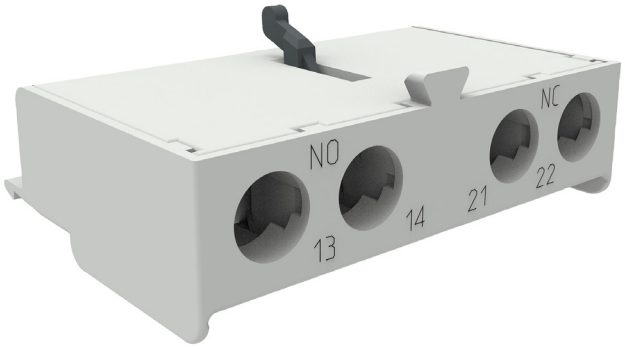

Component type	Auxiliary contact block
Range	140MP
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 140MP Motor Protection Circuit Breakers provide magnetic short-circuit and thermal overload protection up to 32 A, with an interrupting rating 400V of up to 100 kA. Available in a range of accessories and tested in combination with Allen-Bradley Bulletin 100-C and 100-K contactors creating two-component motor starters.

ELECTRICAL	**Number of contacts as normally open contact**	1
	Number of contacts as normally closed contact	1
	Rated insulation voltage Ui	690 V
	Rated operation current Ie at AC-15, 24 V	6 A
	Rated operation current Ie at AC-15, 120 V	6 A
	Rated operation current Ie at AC-15, 240 V	4 A
	Rated operation current Ie at AC-15, 400 V	3 A
	Rated operation current Ie at DC-13, 24 V	2 A
	Rated operation current Ie at DC-13, 125 V	0.55 A
	Rated operation current Ie at DC-13, 250 V	0.27 A
	Min. contact rating current	5 mA
	Min. contact rating voltage	17 V
CONSTRUCTION	**Mounting method**	Side mounting

Published on 25 June 2026