# 20F11ND022JA0NNNNN

**Allen-Bradley PowerFlex 753 VSD 480V IP20 22A 15 HP ND or 14A 10 HP HD Frame 2**

LARGE DRIVES




| | |
|---|---|
| **Component type** | Frequency converter =< 1 kV |
| **Range** | PowerFlex 753 |
| **Model** | N/A |
| **Product status** | Existing |

The Allen-Bradley 753 AC Drives are a cost-effective and simple solution for general-purpose applications. Ideal for machine builders and system integrators wanting to minimise engineering costs while increasing productivity. Features built-in I/O as standard and available with a wide range of card options.

| | | |
|---|---|---|
| **ELECTRICAL** | **Number of phases input** | 3 |
| | **Nominal input voltage** | 480 V |
| | **Nominal output power AC** | 11 kW |
| | **Nominal output current I2N** | 22 A |
| | **kW rating, normal duty** | 11 kW |
| | **kW rating, heavy duty** | 7.5 kW |
| | **Control characteristic** | PID |
| | **EMC-version** | Yes |
| **CONSTRUCTION** | **Suitable for safety functions** | Yes |
| | **Contains keypad** | No |
| | **Frame size** | 2 |
| | **IP rating** | IP20 |



Published on 30 September 2026

# 20F11ND022JA0NNNNN

**Allen-Bradley PowerFlex 753 VSD 480V IP20 22A 15 HP ND or 14A 10 HP HD Frame 2**

LARGE DRIVES

## DIMENSIONAL DIAGRAM

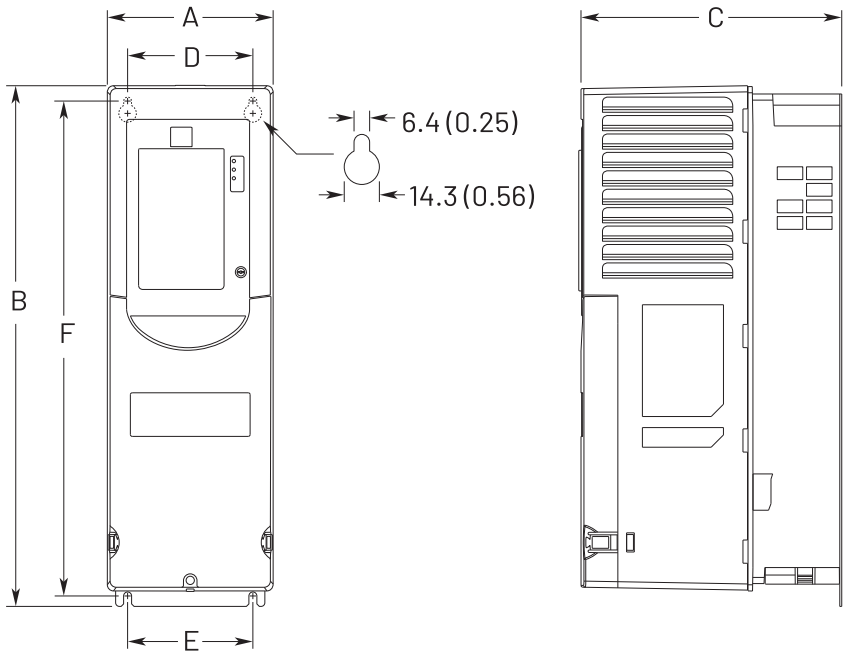


Dimensions are in millimeters and (inches).
Weights are in kilograms and (pounds).

| Frame | A | B | C | D | E | F | Weight, kg (lb) |
|---|---|---|---|---|---|---|---|
| 1 | 110.0 (4.33) | 400.5 (15.77) | 211.0 (8.31) | 68.0 (2.68) | 82.0 (3.23) | 390.4 (15.37) | 6.0 (12.75) |
| 2 | 134.5 (5.30) | 424.2 (16.70) | 212.0 (8.35) | 100.0 (3.94) | 100.0 (3.94) | 404.2 (15.91) | 7.8 (17.2) |
| 3 | 190.0 (7.48) | 454.0 (17.87) | 212.0 (8.35) | 158.0 (6.22) | 158.0 (6.22) | 435.0 (17.13) | 11.8 (26.1) |
| 4 | 222.0 (8.74) | 474.0 (18.66) | 212.0 (8.35) | 194.0 (7.64) | 202.0 (7.95) | 455.0 (17.91) | 13.6 (30.0) |
| 5 | 270.0 (10.63) | 550.0 (21.65) | 212.0 (8.35) | 238.0 (9.37) | 238.0 (9.37) | 531.0 (20.91) | 20.4 (45.0) |



Published on 30 September 2026