20G21GC2P1JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP54 2.1A 0.75kW ND/ HD Frame 2

LARGE DRIVES



Component type	Frequency converter =< 1 kV
Range	PowerFlex 755T
Model	N/A
Product status	Existing

The Allen-Bradley PowerFlex 755T range of variable speed drives are an extension to the PowerFlex 750 drive portfolio providing solutions for harmonic mitigation and regeneration applications. Fitted with TotalFORCE technology they deliver high performance motor control, adaptive control of torque, velocity, position and predictive analytics on the drives health.

ELECTRICAL	kW rating, normal duty	0.75 kW
	kW rating, heavy duty	0.75 kW
	Mains frequency	50/60 Hz
COMMUNICATION	Supporting protocol for EtherNet/IP	Yes
CONSTRUCTION	Frame size	2
	IP rating	IP54
DIMENSIONS	Height	543.2 mm
	Width	225.6 mm
	Depth	216.5 mm
	Weight	8 kg
ENVIRONMENT	Operating temperature	-20…60 °C


Published on 06 November 2026

20G21GC2P1JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP54 2.1A 0.75kW ND/ HD Frame 2

LARGE DRIVES

DIMENSIONAL DIAGRAM

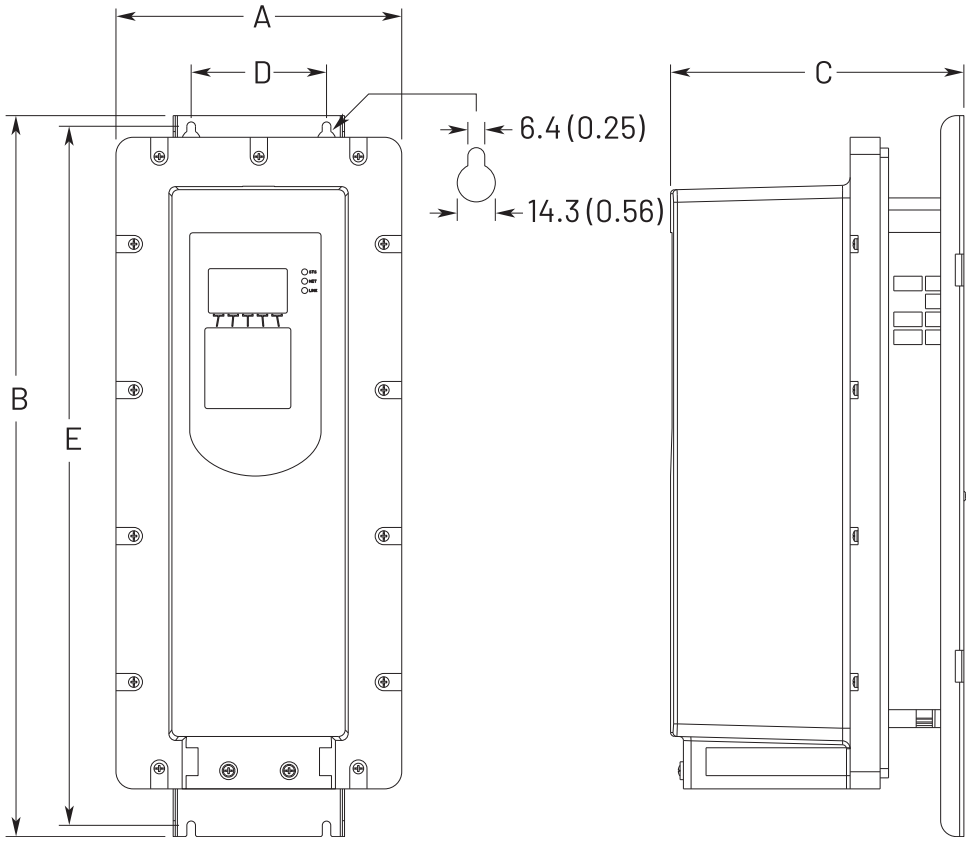

Dimensions are in millimeters and (inches).
Weights are in kilograms and (pounds).

Frame	A	B	C	D	E	Weight, kg (lb)
2	215.3 (8.48)	543.2 (21.39)	222.2 (8.75)	100.0 (3.94)	528.2 (20.80)	7.8 (17.2)
3	268.0 (10.55)	551.0 (21.69)	220.1 (8.67)	158.0 (6.22)	533.0 (20.98)	11.8 (26.1)
4	300.0 (11.81)	571.0 (22.48)	220.1 (8.67)	194.0 (7.64)	553.0 (21.77)	13.6 (30.0)
5	348.0 (13.70)	647.0 (25.47)	220.1 (8.67)	238.0 (9.37)	629.0 (24.76)	20.4 (45.0)

Published on 06 November 2026