20G24NC367JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP20 ND 367A 200kW or HD 160kW Frame 7

LARGE DRIVES



Component type	Frequency converter =< 1 kV
Range	PowerFlex 755T
Model	N/A
Product status	Existing

The Allen-Bradley PowerFlex 755T range of variable speed drives are an extension to the PowerFlex 750 drive portfolio providing solutions for harmonic mitigation and regeneration applications. Fitted with TotalFORCE technology they deliver high performance motor control, adaptive control of torque, velocity, position and predictive analytics on the drives health.

ELECTRICAL	Nominal output current I2N	367 A
	kW rating, normal duty	200 kW
	kW rating, heavy duty	160 kW
CONSTRUCTION	Frame size	7
	IP rating	IP20
DIMENSIONS	Height	881.5 mm
	Width	430 mm
	Depth	349.6 mm
	Weight	82 kg
ENVIRONMENT	Operating temperature	-20…50 °C
	Storage temperature	-40…70 °C


Published on 05 November 2026

20G24NC367JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP20 ND 367A 200kW or HD 160kW Frame 7

LARGE DRIVES

DIMENSIONAL DIAGRAM

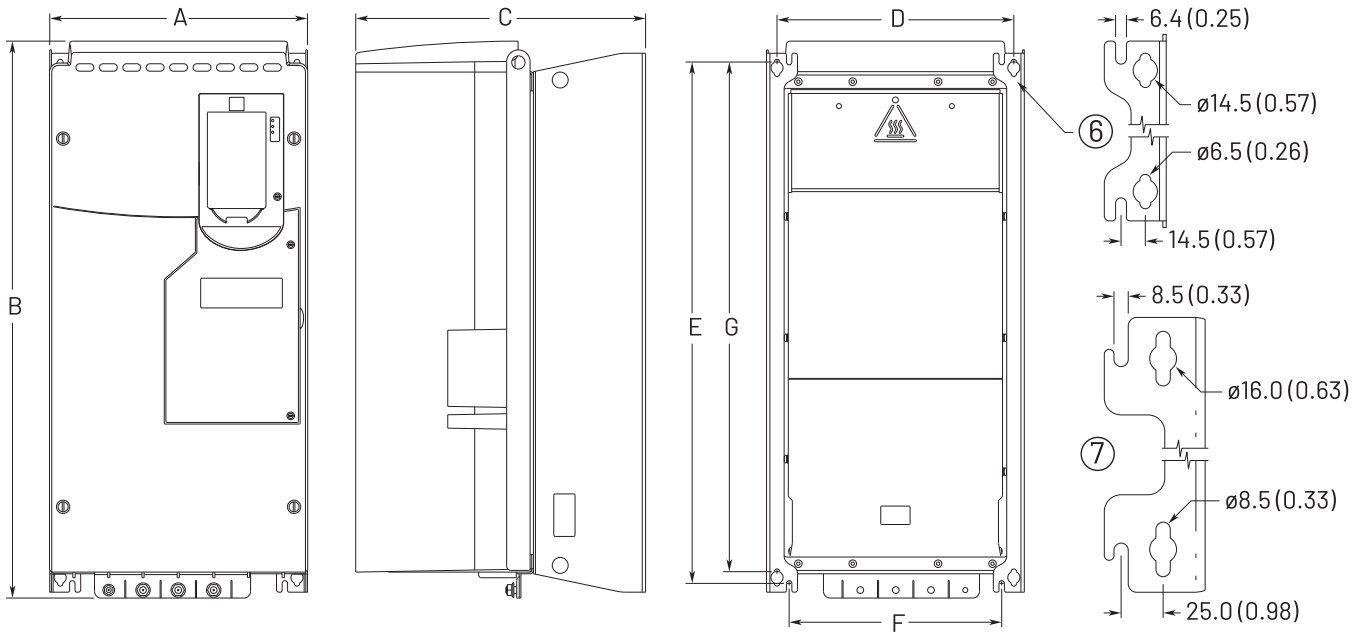

Dimensions are in millimeters and (inches).

Frame	A	B	C	D	E	F	G	Weight kg (lb)
6	308.0 (12.13)	665.5 (26.20)	346.4 (13.64)	283.0 (11.14)	623.0 (24.53)	254.0 (10.00)	609.0 (23.98)	38.6 (85.0)
7	430.0 (16.93)	881.5 (34.70)	349.6 (13.76)	380.0 (14.96)	838.0 (32.99)	330.0 (12.99)	825.0 (32.48)	72.6...108.9 (160.0...240.0)

Published on 05 November 2026