20G2ANC140JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP20 ND 140A 75kW or HD 104A 55kW Frame 6

LARGE DRIVES



Component type	Frequency converter =< 1 kV
Range	PowerFlex 755T
Model	N/A
Product status	Existing

The Allen-Bradley PowerFlex 755T range of variable speed drives are an extension to the PowerFlex 750 drive portfolio providing solutions for harmonic mitigation and regeneration applications. Fitted with TotalFORCE technology they deliver high performance motor control, adaptive control of torque, velocity, position and predictive analytics on the drives health.

ELECTRICAL	Nominal output current I2N	140 A
	kW rating, normal duty	75 kW
	kW rating, heavy duty	55 kW
COMMUNICATION	Supporting protocol for EtherNet/IP	Yes
CONSTRUCTION	Frame size	6
	IP rating	IP20
DIMENSIONS	Height	665.5 mm
	Width	308 mm
	Depth	346.4 mm
	Weight	48 kg

Published on 02 November 2026

20G2ANC140JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP20 ND 140A 75kW or HD 104A 55kW Frame 6

LARGE DRIVES

DIMENSIONAL DIAGRAM

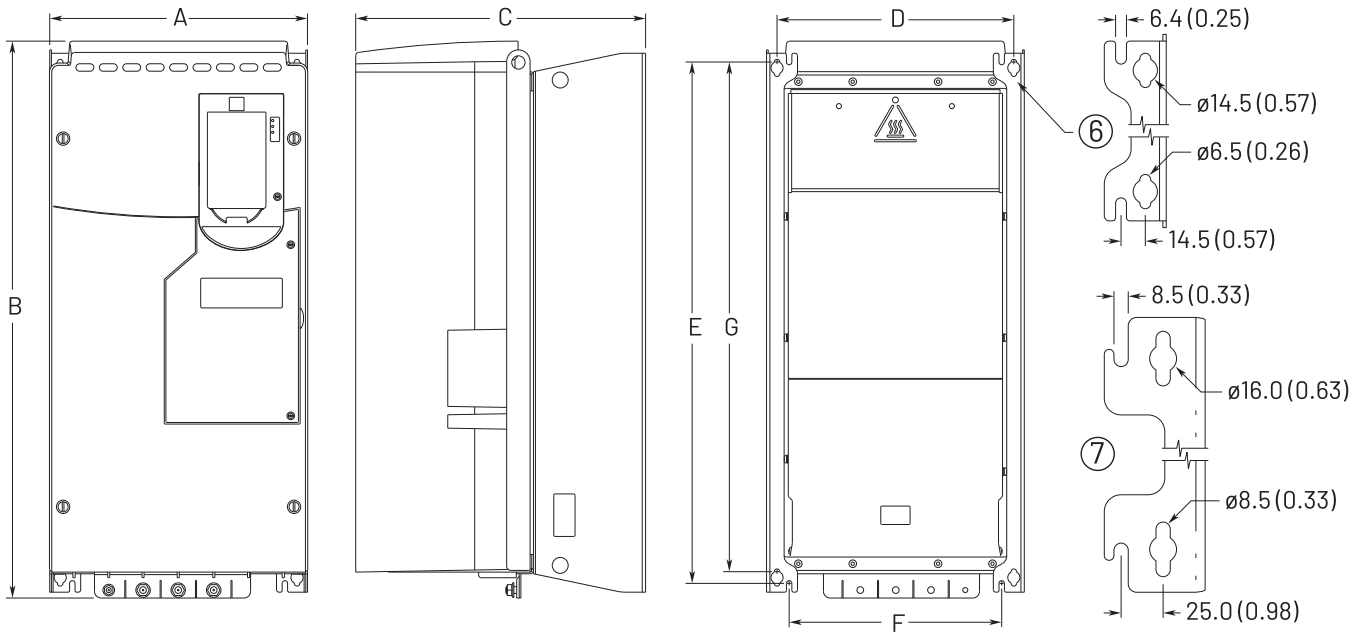

Dimensions are in millimeters and (inches).

Frame	A	B	C	D	E	F	G	Weight kg (lb)
6	308.0 (12.13)	665.5 (26.20)	346.4 (13.64)	283.0 (11.14)	623.0 (24.53)	254.0 (10.00)	609.0 (23.98)	38.6 (85.0)
7	430.0 (16.93)	881.5 (34.70)	349.6 (13.76)	380.0 (14.96)	838.0 (32.99)	330.0 (12.99)	825.0 (32.48)	72.6...108.9 (160.0...240.0)

Published on 02 November 2026