55400GWNBB

NHP Trip Wire Switch Glass Window 2NC 2NO

ELECTRICAL ENGINEERING PRODUCTS



Component type	Emergency stop pull cord switch
Range	NHP Austrol
Model	N/A
Alternative	ZS802O2STWINTP

ELECTRICAL	Number of contacts as normally open contact	2
	Number of contacts as normally closed contact	2
	Rated insulation voltage Ui	600 V
	Rated operation current Ie at AC-15, 240 V	3 A
	Rated operation current Ie at AC-15, 415 V	1.5 A
	Rated operation current Ie at DC-12, 32 V	10 A
	Rated operation current Ie at DC-12, 110 V	5 A
	Rated operation current Ie at DC-12, 240 V	2 A
	Rated operation current Ie at DC-13, 32 V	10 A
	Rated operation current Ie at DC-13, 110 V	2.2 A
	Rated operation current Ie at DC-13, 240 V	1.1 A
CONSTRUCTION	Emergency stop button	No
	Material housing	Aluminium
	Colour	Yellow
	IP rating	IP65/IP67
DIMENSIONS	Height	189 mm
	Width	284 mm
	Depth	124 mm


Published on 01 June 2026

55400GWNBB

NHP Trip Wire Switch Glass Window 2NC 2NO

ELECTRICAL ENGINEERING PRODUCTS

DIMENSIONAL DIAGRAM

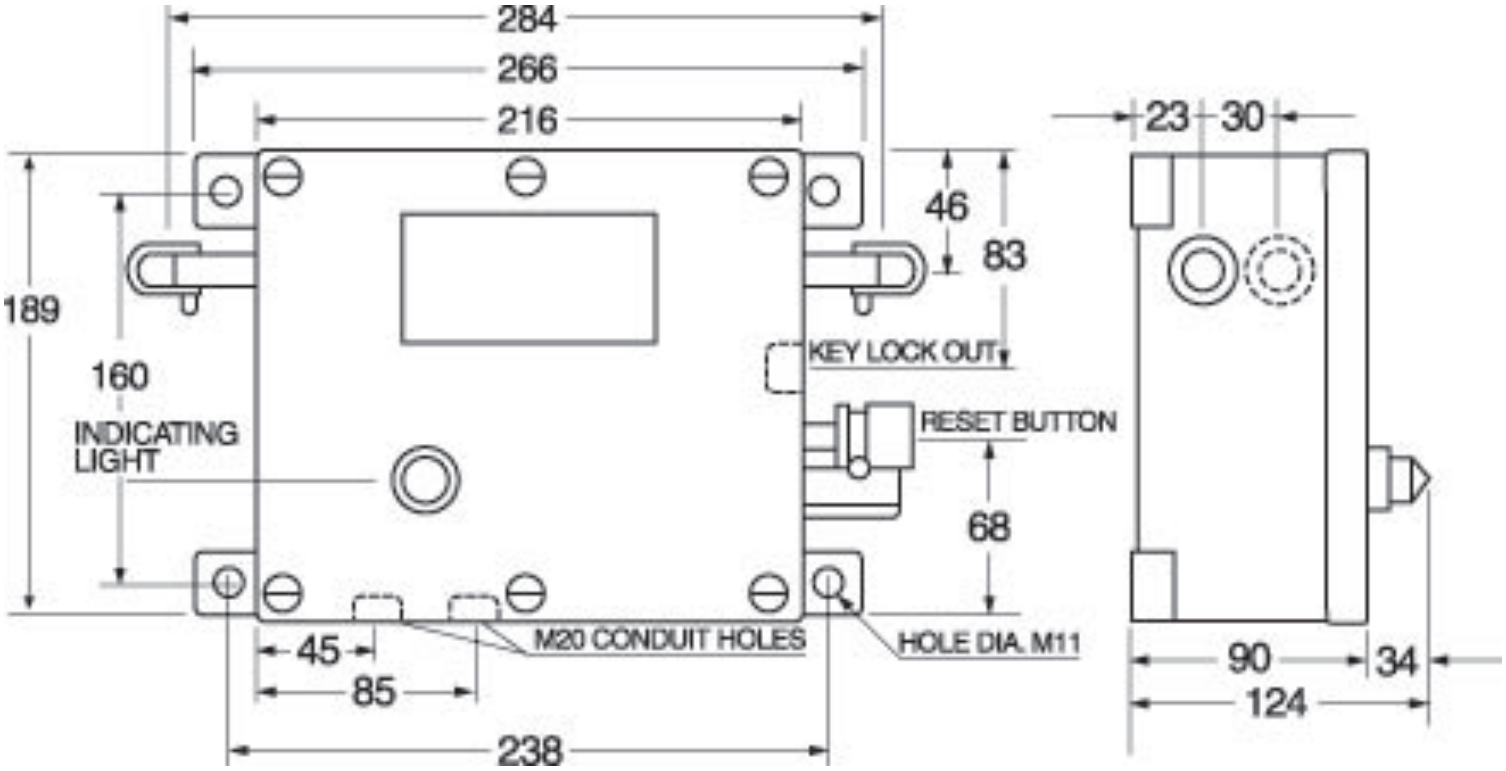

Published on 01 June 2026