800H2HZ4R

Allen-Bradley 800H Enclosure Rosite Glass Poly 2 Holes 3 4 Inch Conduit Entry for 30.5mm Pushbutton

PUSHBUTTON AND PILOT LIGHTS



Component type	Control circuit devices combination in enclosure
Range	800T/H Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

CONSTRUCTION	Number of push buttons	2
	Number of key switches	2
	Number of selector switches	2
	Number of mushroom-shaped push-buttons	2
	Colour housing cover	Grey
	Material housing	Other
MECHANICAL	Max. vibration acceleration	10 m/s²
	Max. vibration frequency, operational	2000 Hz
	Max. shock acceleration	100 g
DIMENSIONS	Height	178.6 mm
	Width	96.8 mm
	Depth	100.8 mm
ENVIRONMENT	Operating temperature	-40-55


Published on 21 September 2026

800H2HZ4R

Allen-Bradley 800H Enclosure Rosite Glass Poly 2 Holes 3 4 Inch Conduit Entry for 30.5mm Pushbutton

PUSHBUTTON AND PILOT LIGHTS

DIMENSIONAL DIAGRAM

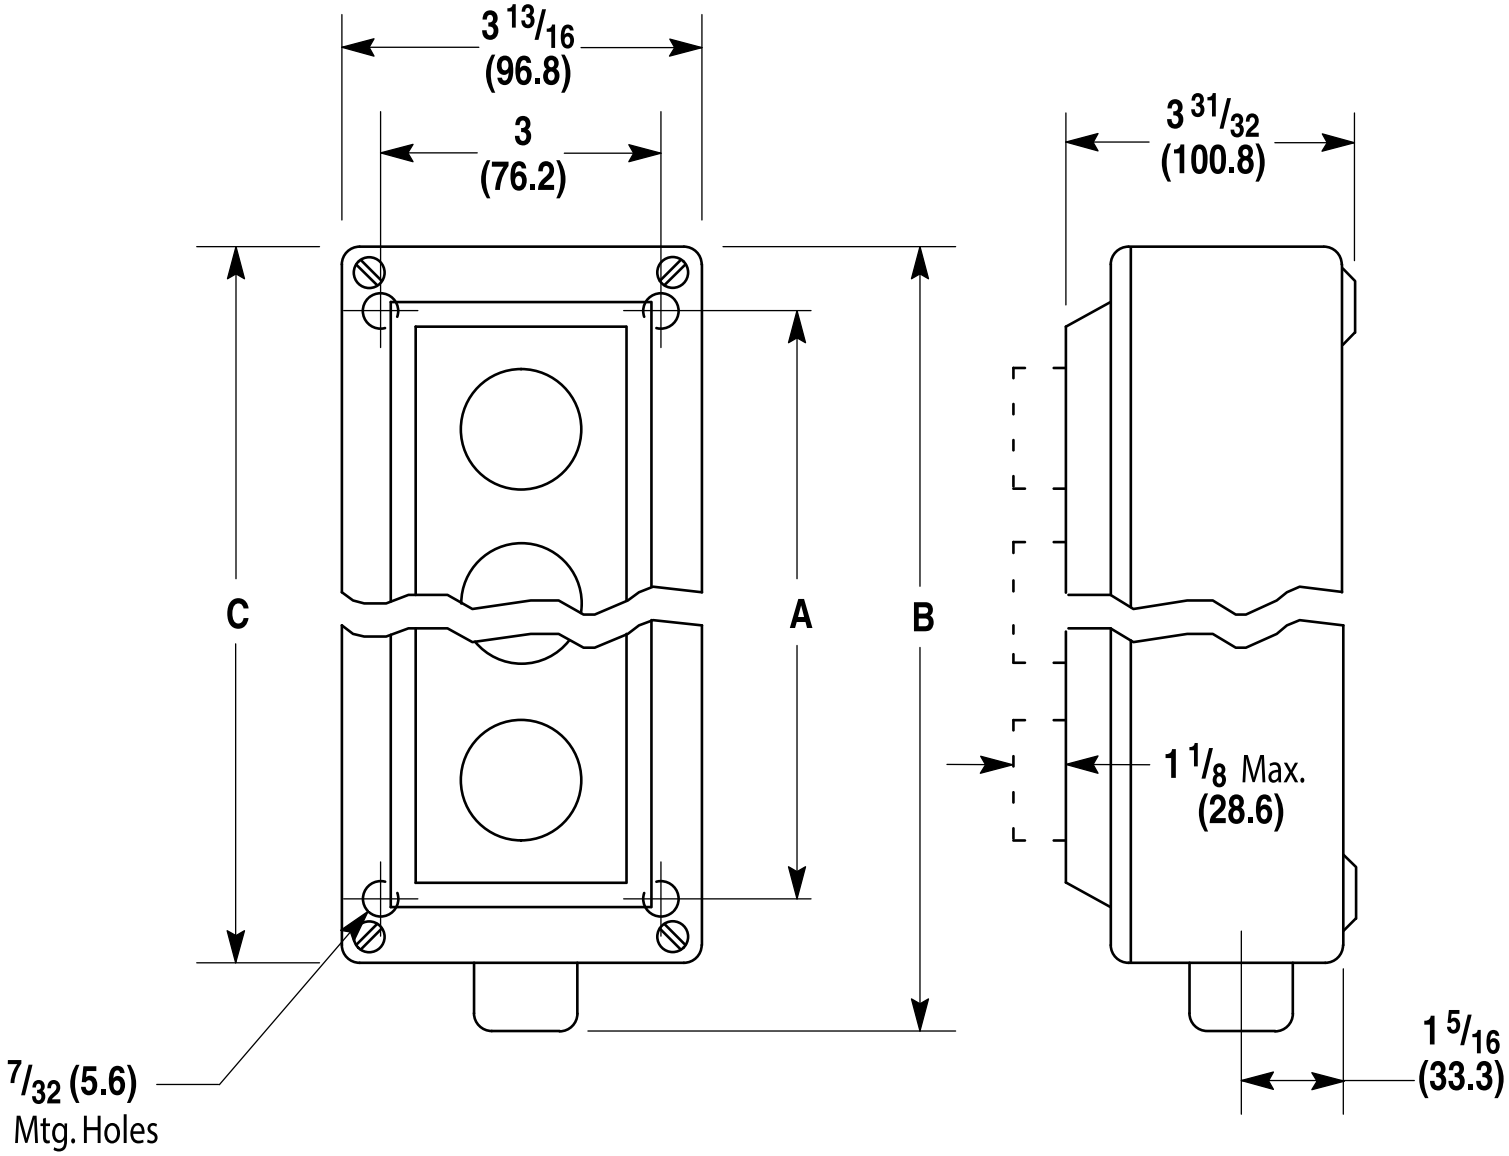

Type 4/4X/13 Rosite Glass Polyester
Watertight, Oiltight, Corrosion Resistant Enclosure

Published on 21 September 2026