# CA914611480WKIT

**S+S CA9 Contactor Kit 75kW 3Pole 250 to 500VAC and VDC Coil 1NO 1NC Contact Auxiliary**

CONTACTORS




| | |
|---|---|
| **Component type** | Power contactor, AC switching |
| **Range** | CA9 |
| **Model** | N/A |
| **Product status** | Existing |

The Sprecher + Schuh CA9 contactors are designed with a smaller footprint and are ideal for harsh environments such as steel mills, rock quarries, mines or for large power applications where a sturdy, durable contactor is required. Combining the basic functionality of the CA7 series and the rugged performance demanded in this larger horsepower range, they are guaranteed to increase productivity.

| | | |
|---|---|---|
| **ELECTRICAL** | Number of normally open contacts as main contact | 3 |
| | Number of normally closed contacts as main contact | 0 |
| | Rated operation current Ie at AC-3, 400 V | 146 A |
| | Rated operation power at AC-3, 400 V | 75 kW |
| | Rated operation current Ie at AC-1, 400 V | 225 A |
| | Max. rated operation voltage Ue AC | 1000 V |
| | Voltage type for actuating | AC/DC |
| | Rated control supply voltage Us at AC 50HZ | 250-500 V |
| | Rated control supply voltage Us at DC | 250-500 V |
| | Number of auxiliary contacts as normally open contact | 1 |
| | Number of auxiliary contacts as normally closed contact | 1 |
| | Rated operation current Ie at AC-3, 690 V | 93 A |
| | Rated operation power at AC-3, 690 V | 90 kW |
| | Rated operation current Ie at AC-3, 1000 V | 60 A |
| | Rated operation power at AC-3, 1000 V | 75 kW |
| | Rated operation power at AC-4, 400 V | 55 kW |
| | Rated control supply voltage Us at AC 60HZ | 250-500 V |
| | Power consumption, AC coil pickup | 205 VA |
| | Power consumption, AC coil hold-in | 16 VA |
| | Power consumption, DC coil pickup | 205 W |
| | Power consumption, DC coil hold-in | 4 W |
| | Type of electrical connection of main circuit | Bolt connection |
| | Rated operation current Ie at AC-4, 400 V | 103 A |
| **CONSTRUCTION** | IP rating | IP00 |

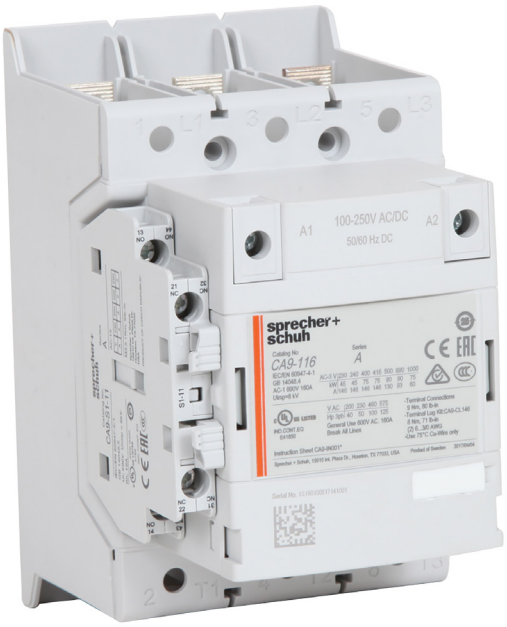

Published on 01 October 2026

# CA914611480WKIT

**S+S CA9 Contactor Kit 75kW 3Pole 250 to 500VAC and VDC Coil 1NO 1NC Contact Auxiliary**

CONTACTORS

| | | |
|---|---|---|
| **CONSTRUCTION** | **Mounting method** | Screw mounting |
| **DIMENSIONS** | **Height** | 150 mm |
| | **Width** | 90 mm |
| | **Depth** | 126 mm |
| | **Weight** | 1.5 kg |





Published on 01 October 2026