CA92650EI11120W

S+S CA9 Contactor 2050A AC1 100 to 250VAC and VDC Electronic Coil 1NO 1NC Contact Auxiliary

CONTACTORS



Component type	Power contactor, AC switching
Range	CA9
Model	N/A
Product status	Existing

The Sprecher + Schuh CA9 contactors are designed with a smaller footprint and are ideal for harsh environments such as steel mills, rock quarries, mines or for large power applications where a sturdy, durable contactor is required. Combining the basic functionality of the CA7 series and the rugged performance demanded in this larger horsepower range, they are guaranteed to increase productivity.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-1, 400 V	2650 A
	Max. rated operation voltage Ue AC	1000 V
	Voltage type for actuating	AC/DC
	Rated control supply voltage Us at AC 50HZ	100-250 V
	Rated control supply voltage Us at DC	100-250 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	1
	Rated control supply voltage Us at AC 60HZ	100-250 V
	Power consumption, AC coil pickup	2450 VA
	Power consumption, AC coil hold-in	48 VA
	Power consumption, DC coil pickup	2290 W
	Power consumption, DC coil hold-in	20.5 W
	Type of electrical connection of main circuit	Bolt connection
CONSTRUCTION	IP rating	IP00
	Mounting method	Screw mounting
DIMENSIONS	Height	392 mm
	Width	438 mm
	Depth	244 mm
	Weight	45 kg

Published on 01 October 2026

CA92650EI11120W


S+S CA9 Contactor 2050A AC1 100 to 250VAC and VDC Electronic Coil 1NO 1NC Contact Auxiliary

CONTACTORS


DIMENSIONAL DIAGRAM


Series CA9-860-EI, CA9-1060-EI, CA9-2050-EI, CA9-2650-EI (Contactors with PLC Interface)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

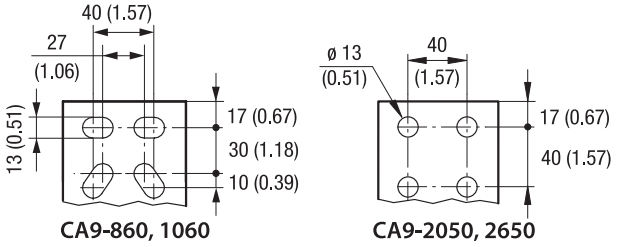

Dim	CA9-860, 1060, 2050	CA9-2650
A	392 (15.43)	422 (16.61
B	47 (1.85)	53 (2.09)
C	10 (0.39)	25 (0.98)

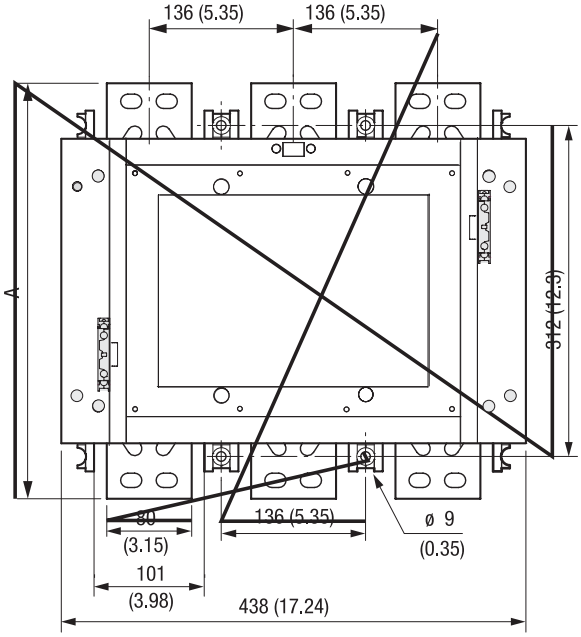

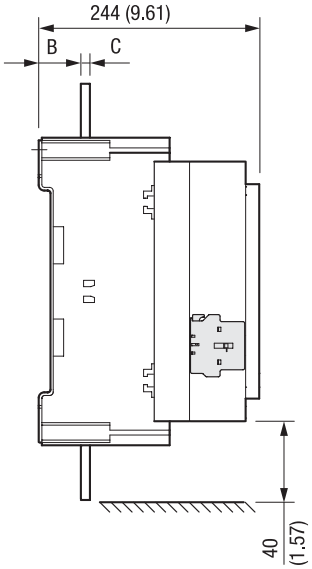

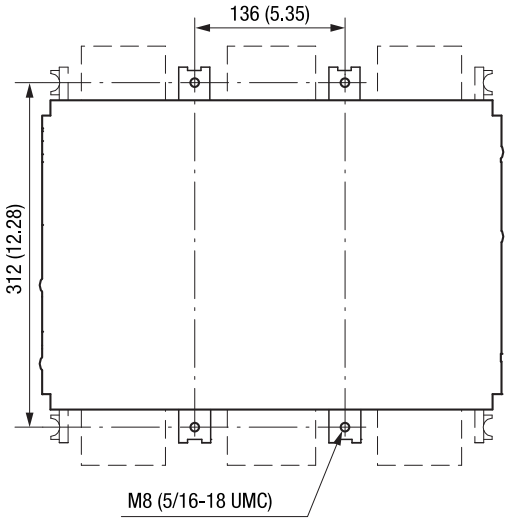

RELATED PRODUCTS

ACCESSORY



Item No: CA9A2650

Required: No

Description: S+S CA9 Main Contact Set for CA92650 Movable Contacts Only



Item No: CA9M300

Required: No

Description: S+S CA9 Mechanical Interlock

Item No: CA9C2650

Required: No

Description: S+S CA9 Arc Chute for CA9 2650



Item No: CA9S311

Required: No

Description: S+S CA9 Auxiliary Contact with 1NO Contact and 1NC Contact Inside Position for CA9 400 and 2650

Published on 01 October 2026

RELATED PRODUCTS

ACCESSORY



Item No: CA9S3B01

Required: No

Description: S+S CA9 Auxiliary Contact with 1NC Contact Low Power Inside Position for CA9 400 and 2650



Item No: CA9S3B10

Required: No

Description: S+S CA9 Auxiliary Contact with 1NO Contact Low Power Inside Position for CA9 400 and 2650



Item No: CA9S411

Required: No

Description: S+S CA9 Auxiliary Contact with 1NO Contact and 1NC Contact Outside Position for CA9 400 and 2650



Item No: CA9TLE903

Required: No

Description: S+S CA9 Coil for CA9 2650 100 to 250VAC and VDC Electronic



Item No: CA9TLE904

Required: No

Description: S+S CA9 Coil PCB for CA9 2650 100 to 250VAC and VDC Electronic