CA926511480W

S+S CA9 Contactor 132kW 3Pole 250 to 500VAC and VDC Coil 1NO 1NC Contact Auxiliary

CONTACTORS



Component type	Power contactor, AC switching
Range	CA9
Model	N/A
Product status	Existing

The Sprecher + Schuh CA9 contactors are designed with a smaller footprint and are ideal for harsh environments such as steel mills, rock quarries, mines or for large power applications where a sturdy, durable contactor is required. Combining the basic functionality of the CA7 series and the rugged performance demanded in this larger horsepower range, they are guaranteed to increase productivity.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-3, 400 V	265 A
	Rated operation power at AC-3, 400 V	132 kW
	Rated operation current Ie at AC-1, 400 V	400 A
	Max. rated operation voltage Ue AC	1000 V
	Voltage type for actuating	AC/DC
	Rated control supply voltage Us at AC 50HZ	250-500 V
	Rated control supply voltage Us at DC	250-500 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	1
	Rated operation current Ie at AC-3, 690 V	250 A
	Rated operation power at AC-3, 690 V	200 kW
	Rated operation current Ie at AC-3, 1000 V	113 A
	Rated operation power at AC-3, 1000 V	160 kW
	Rated operation power at AC-4, 400 V	110 kW
	Rated control supply voltage Us at AC 60HZ	250-500 V
	Power consumption, AC coil pickup	420 VA
	Power consumption, AC coil hold-in	21 VA
	Power consumption, DC coil pickup	600 W
	Power consumption, DC coil hold-in	4.7 W
	Type of electrical connection of main circuit	Bolt connection
	Rated operation current Ie at AC-4, 400 V	195 A
CONSTRUCTION	IP rating	IP00

Published on 01 October 2026

CA926511480W

S+S CA9 Contactor 132kW 3Pole 250 to 500VAC and VDC Coil 1NO 1NC Contact Auxiliary


CONTACTORS

CONSTRUCTION	**Mounting method**	Screw mounting
DIMENSIONS	**Height**	225 mm
	Width	140 mm
	Depth	180 mm
	Weight	4.64 kg

DIMENSIONAL DIAGRAM

Series CA9-265…370 (Contactors/Reversing Contactors)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

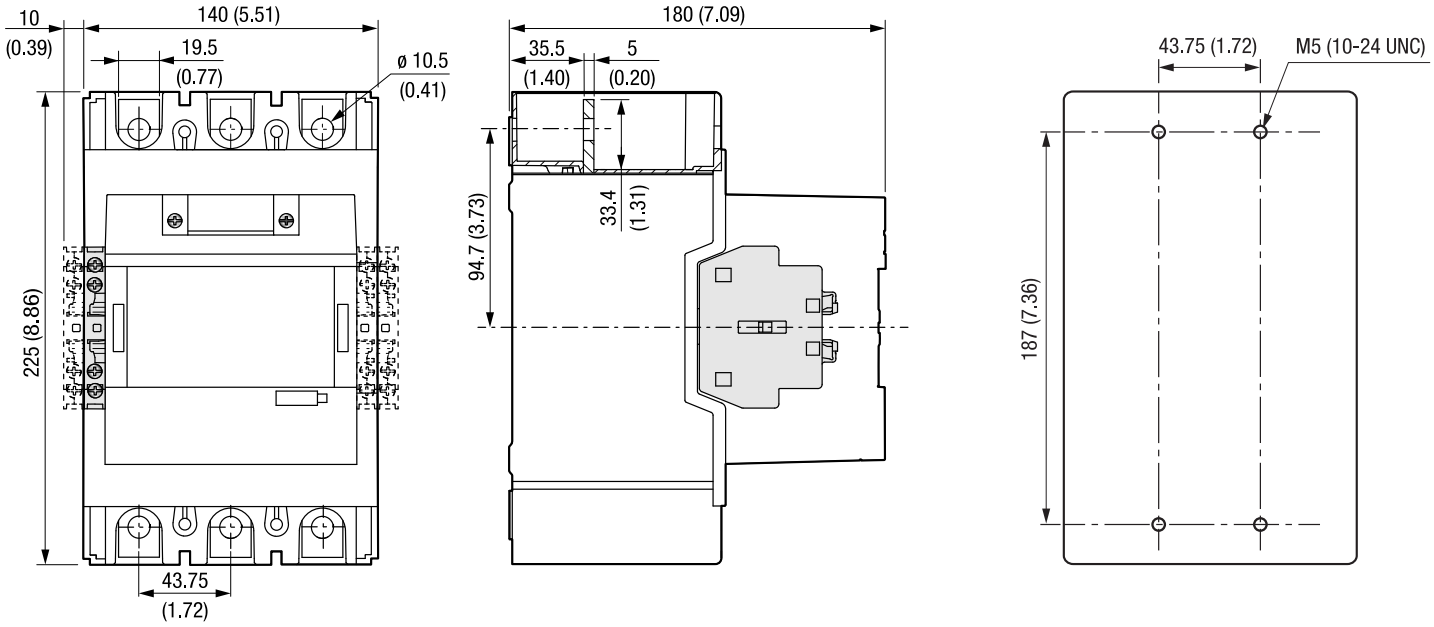

RELATED PRODUCTS

ACCESSORY



Item No: CA9A265
Required: No
Description: S+S CA9 Main Contact Set for CA9265



Item No: CA9M500
Required: No
Description: S+S CA9 Mechanical Interlock

Item No: CA9MR370
Required: No
Description: S+S CA9 Mounting Plate for 265 and 370A Reversing Contactor



Item No: CA9PW370
Required: No
Description: S+S CA9 Reversing Starter Power Connection Links for CA9 265 to 370A

Published on 01 October 2026

CA926511480W

S+S CA9 Contactor 132kW 3Pole 250 to 500VAC and VDC Coil 1NO 1NC Contact Auxiliary

CONTACTORS

RELATED PRODUCTS

ACCESSORY

Item No: CA9PWD265
Required: No
Description: S+S CA9 Star Delta Starter Power Connection Links CA9 265 to 370A

Item No: CA9PWD370
Required: No
Description: S+S CA9 Star Delta Starter Power Connection Links CA9 265 to 370A



Item No: CA9PWY370
Required: No
Description: S+S CA9 Star Point Shorting Link for CA9 265 to 370A



Item No: CA9TG909
Required: No
Description: S+S CA9 Coil for CA9 265 to 370 24 to 60VAC and VDC



Item No: CA9TG910
Required: No
Description: S+S CA9 Coil for CA9 265 to 370 48 to 130VAC and VDC



Item No: CA9TG911
Required: No
Description: S+S CA9 Coil for CA9 265 to 370 100 to 250VAC and VDC



Item No: CA9TG912
Required: No
Description: S+S CA9 Coil for CA9 265 to 370 250 to 500VAC and VDC

Item No: CA9TL370
Required: No
Description: S+S CA9 Terminal Lug for CA9 265 to 370A



Item No: CA9TS370C
Required: No
Description: S+S CA9 Terminal Shrouds for CA9 265 to 370A



Item No: CA9TS370L
Required: No
Description: S+S CA9 Terminal Shrouds for CA9 265 to 370A

Item No: CA9TX370
Required: No
Description: Sprecher + Schuh Terminal Extension For CA9-265/370 (Qty 1)

Published on 01 October 2026