CEL3250M

NHP Panelboard Accessory Isolator Switch 250A 3Pole 25kA

ELECTRICAL ENGINEERING PRODUCTS



Component type	Switch disconnector
Range	Panelboard General Accessories
Model	N/A
Product status	Existing

NHP Panelboards offer a wide range of high-quality accessories that are specifically designed, verified, and tested to ensure compliance with AS/NZS 61439.

ELECTRICAL	Max. rated operation voltage Ue AC	690 V
	Rated uninterrupted current Iu	250 A
	Number of poles	3
	Frequency	50/60 Hz
	Rated insulation voltage Ui	690 V
	Rated impulse withstand voltage Uimp	8 kV
	Electrical life at Un, In (service cycles)	6000 cycles
	Type of control element	Toggle
	Number of auxiliary contacts as normally closed contact	0
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as change-over contact	0
	Motor drive integrated	No
	Voltage release optional	No
CONSTRUCTION	Colour control element	Black
	Version as main switch	Yes
	Version as safety switch	No
	Version as reversing switch	No
	Number of switches	1
	Suitable for front mounting 4-hole	Yes
	Suitable for front mounting centre	No
	Suitable for distribution board installation	Yes
	Interlockable	Yes
MECHANICAL	Mechanical life (service cycles)	18000 cycles
DIMENSIONS	Height	165 mm

Published on 24 July 2026


CEL3250M

NHP Panelboard Accessory Isolator Switch 250A 3Pole 25kA

ELECTRICAL ENGINEERING PRODUCTS

DIMENSIONS	Width	105 mm
	Depth	95 mm
	Weight	1.5 kg
ENVIRONMENT	Rated surrounding temperature without derating	70 °C
	Storage temperature	-10…70 °C
	Allowable relative humidity	85 %
	Max. altitude before derating	2000 m

DIMENSIONAL DIAGRAM

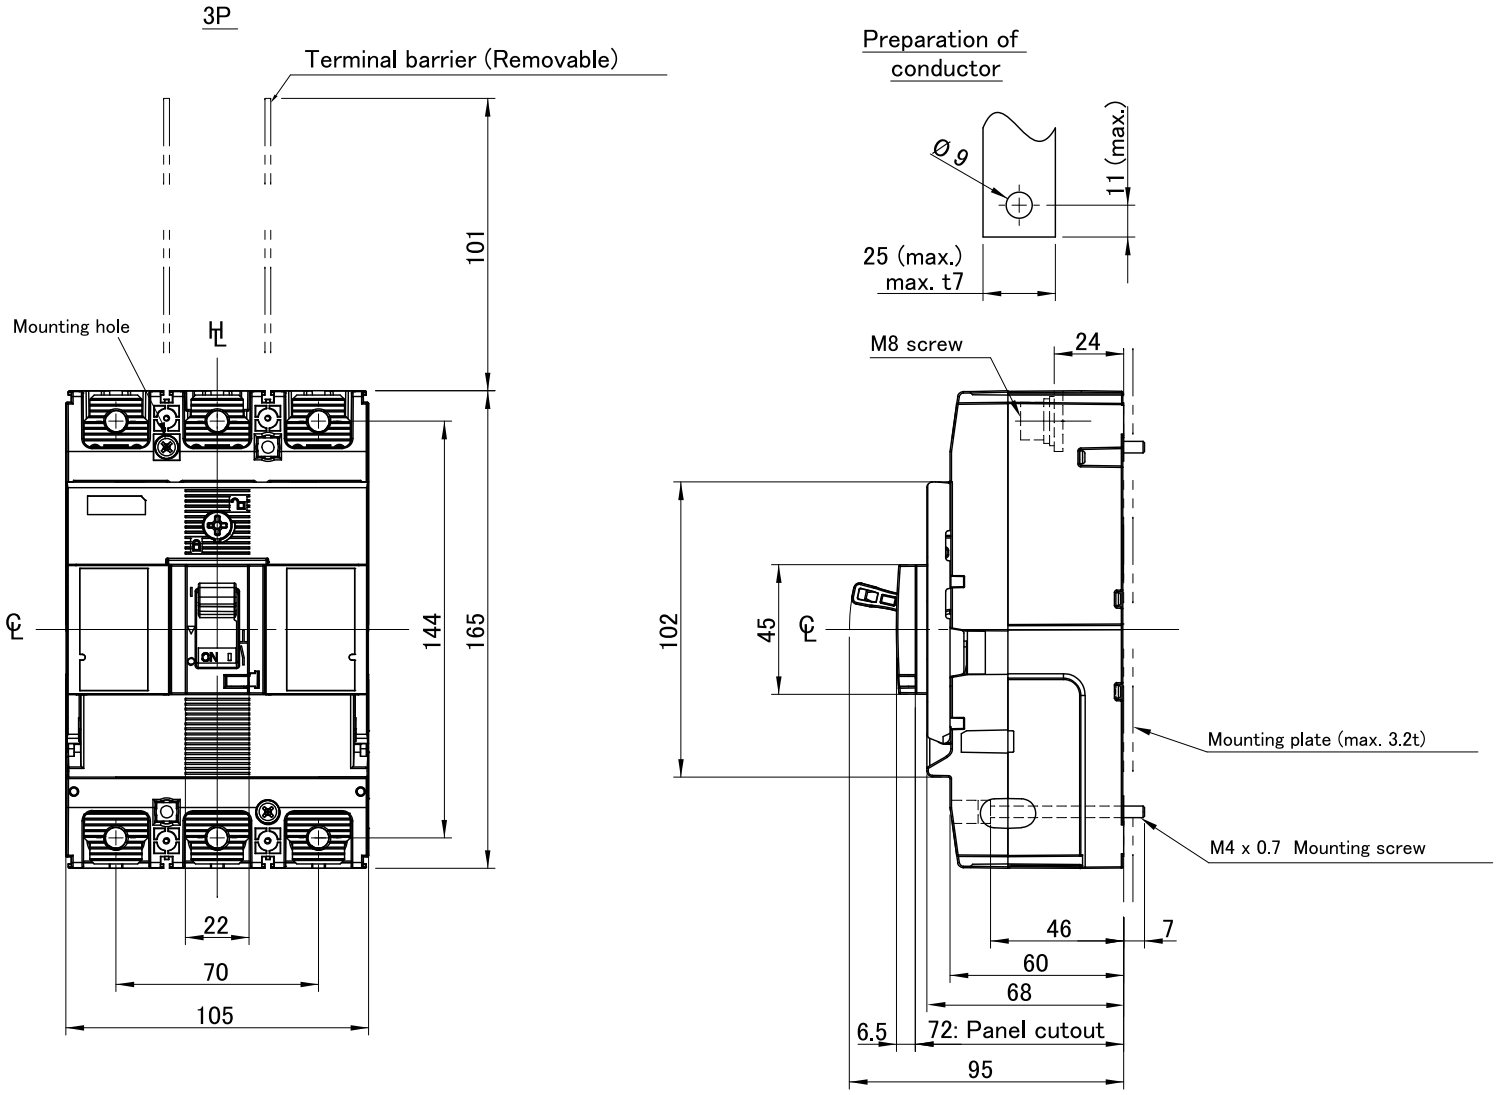

Published on 24 July 2026

RELATED PRODUCTS

ACCESSORY



Item No: T2AX00LML3STA

Required: No

Description: Terasaki TemBreak PRO Auxiliary Switch for A and P Models 1 CO Contact General Type



Item No: T2BA25L3SH

Required: No

Description: Terasaki TemBreak PRO Interpole Barriers for A250/P250/ZS250 Qty 2



Item No: T2CF25L3SLEP

Required: No

Description: Terasaki TemBreak PRO Terminal Cover CF Long Style with Barrier for 3P A250 and P250 MCCB Qty 2



Item No: T2CF25L3SLHP

Required: No

Description: Terasaki TemBreak PRO Terminal Cover CF Long Style for 3P A250 and P250 MCCB Qty 1



Item No: T2CF25L3SLNGA

Required: No

Description: Terasaki TemBreak 2 Terminal Cover Front Connect 3P Narrow E250/S250SJ/SN Lite



Item No: T2CF25L3SSHP

Required: No

Description: Terasaki TemBreak PRO Terminal Cover CF Short Style for 3P A250 and P250 MCCB Qty 1



Item No: T2CF25L3SWHP

Required: No

Description: Terasaki TemBreak PRO Terminal Cover CF Wide Style for 3P A250 and P250 MCCB Qty 1



Item No: T2FB25L3SH

Required: No

Description: Terasaki TemBreak PRO Straight Extension Bars 3P A/P/B/ZS250 MCCB Qty 3



Item No: T2FB25L3WH

Required: No

Description: Terasaki TemBreak PRO Flanged Extension Bars 3P A/P/B/ZS250 MCCB Qty 3



Item No: T2FW25LS3A

Required: No

Description: Terasaki TemBreak PRO Tunnel Terminal fits 35 to 120mm2 for A250/P250 Qty 6



Item No: T2HL25L

Required: No

Description: Terasaki TemBreak PRO Non Captive Toggle Lock 5 x 16.5mm Slot for A160/A250/P160/P250



Item No: T2SH00LA20T

Required: No

Description: Terasaki TemBreak PRO Shunt Trip for A/P Models 230-240V AC



Item No: T2UV00LA20NT

Required: No

Description: Terasaki TemBreak PRO Undervoltage Trip Instantaneous for A/P Models 230 to 240V AC