GH15BN22415VAC

Ghisalba Contactor 4kW 4Pole 415VAC Coil 2NO 2NC Contact Auxiliary

ELECTRICAL ENGINEERING PRODUCTS



Component type	Power contactor, AC switching
Range	Contactors
Model	N/A
Product status	Existing

Ghisalba's range of contactor families are available in a wide variety of contactor sizes, offering both economy and choice. Specialising in 3 and 4 pole contactors, with ranges from 4kW up to 710kW at 415V AC and 280kW up to 500kW at 1000V AC and additional DC switching contactors for up to 1000V DC.

ELECTRICAL	Number of normally open contacts as main contact	2
	Number of normally closed contacts as main contact	2
	Rated operation current Ie at AC-3, 400 V	9 A
	Rated operation power at AC-3, 400 V	4 kW
	Rated operation current Ie at AC-1, 400 V	25 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	AC
	Rated control supply voltage Us at AC 50HZ	380-415 V
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as normally closed contact	0
	Type of electrical connection of main circuit	Screw connection
CONSTRUCTION	IP rating	IP20
	Mounting method	DIN-rail/screw
DIMENSIONS	Height	80 mm
	Width	45 mm
	Depth	85 mm
	Weight	0.4 kg


Published on 30 May 2026

GH15BN22415VAC

Ghisalba Contactor 4kW 4Pole 415VAC Coil 2NO 2NC Contact Auxiliary

ELECTRICAL ENGINEERING PRODUCTS

DIMENSIONAL DIAGRAM

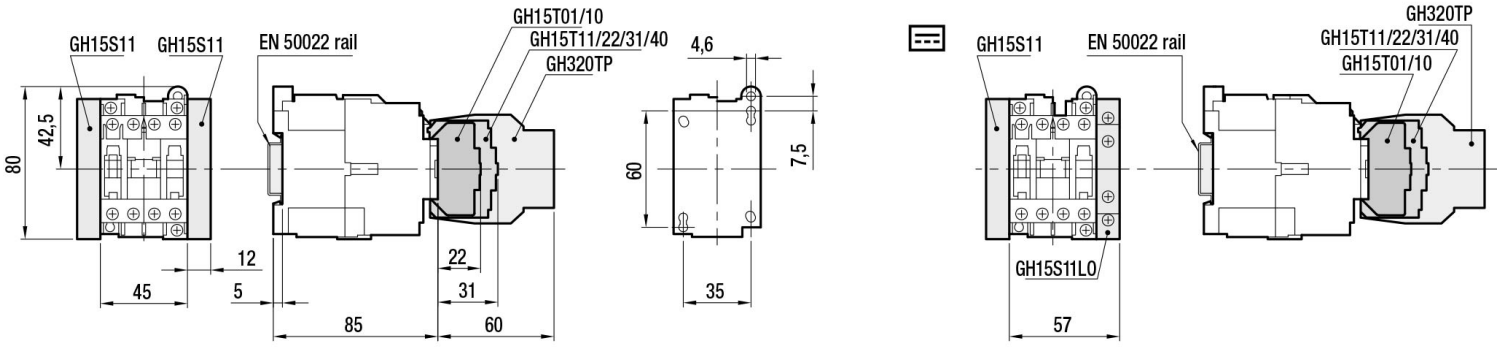

Published on 30 May 2026