# GH15LN22110VAC

**Ghisalba Contactor 45kW 4Pole 110VAC and VDC Coil 2NO 2NC Contact Auxiliary**

NHP ELECTRICAL ENGINEERING PRODUCTS




| | |
|---|---|
| **Component type** | Power contactor, AC switching |
| **Range** | Contactors |
| **Model** | N/A |
| **Product status** | Existing |

Ghisalba's range of contactor families are available in a wide variety of contactor sizes, offering both economy and choice. Specialising in 3 and 4 pole contactors, with ranges from 4kW up to 710kW at 415V AC and 280kW up to 500kW at 1000V AC and additional DC switching contactors for up to 1000V DC.

| | | |
|---|---|---|
| **ELECTRICAL** | Number of normally open contacts as main contact | 2 |
| | Number of normally closed contacts as main contact | 2 |
| | Rated operation current Ie at AC-3, 400 V | 95 A |
| | Rated operation power at AC-3, 400 V | 45 kW |
| | Rated operation current Ie at AC-1, 400 V | 135 A |
| | Max. rated operation voltage Ue AC | 1000 V |
| | Voltage type for actuating | AC/DC |
| | Rated control supply voltage Us at AC 50HZ | 110-120 V |
| | Control supply voltage Us at DC | 110 V |
| | Number of auxiliary contacts as normally open contact | 0 |
| | Number of auxiliary contacts as normally closed contact | 0 |
| | Rated operation current Ie at AC-3, 1000 V | 25 A |
| | Rated control supply voltage Us at AC 60HZ | 110-120 V |
| | Type of electrical connection of main circuit | Screw connection |
| **CONSTRUCTION** | IP rating | IP20 |
| | Mounting method | DIN-rail/screw |
| **DIMENSIONS** | Height | 142 mm |
| | Width | 106 mm |
| | Depth | 130 mm |
| | Weight | 1.3 kg |




Published on 30 May 2026


# GH15LN22110VAC


**Ghisalba Contactor 45kW 4Pole 110VAC and VDC Coil 2NO 2NC Contact Auxiliary**

ELECTRICAL ENGINEERING PRODUCTS

## DIMENSIONAL DIAGRAM

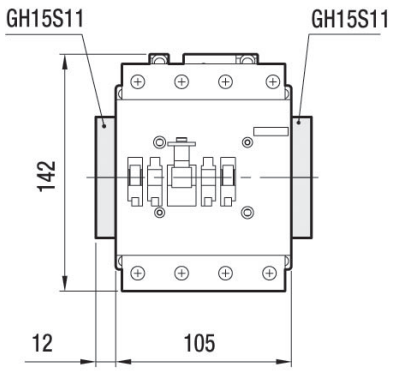

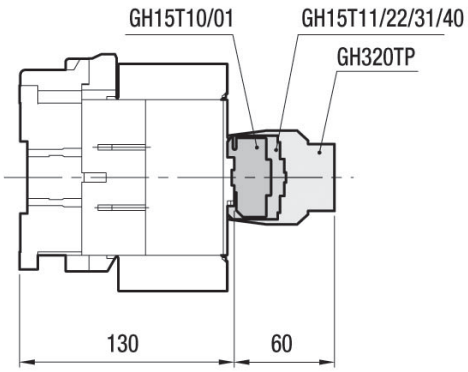

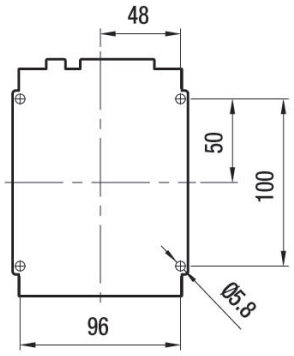
Published on 30 May 2026