
# GH15RTML110V

**Ghisalba Contactor Latching 110kW 3Pole 110VAC and VDC Close Release**

NHP ELECTRICAL ENGINEERING PRODUCTS

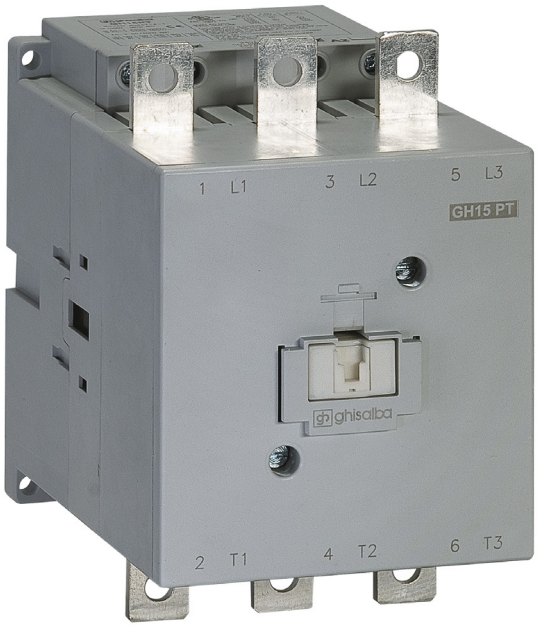


| | |
|---|---|
| **Component type** | Power contactor, AC switching |
| **Range** | Contactors |
| **Model** | N/A |
| **Product status** | Existing |

Ghisalba's range of contactor families are available in a wide variety of contactor sizes, offering both economy and choice. Specialising in 3 and 4 pole contactors, with ranges from 4kW up to 710kW at 415V AC and 280kW up to 500kW at 1000V AC and additional DC switching contactors for up to 1000V DC.

| | | |
|---|---|---|
| **ELECTRICAL** | Number of normally open contacts as main contact | 3 |
| | Number of normally closed contacts as main contact | 0 |
| | Rated operation current Ie at AC-3, 400 V | 210 A |
| | Rated operation power at AC-3, 400 V | 110 kW |
| | Rated operation current Ie at AC-1, 400 V | 350 A |
| | Max. rated operation voltage Ue AC | 1000 V |
| | Voltage type for actuating | AC/DC |
| | Rated control supply voltage Us at AC 50HZ | 110-120 V |
| | Control supply voltage Us at DC | 110 V |
| | Number of auxiliary contacts as normally open contact | 0 |
| | Number of auxiliary contacts as normally closed contact | 0 |
| | Rated operation current Ie at AC-3, 1000 V | 85 A |
| | Rated control supply voltage Us at AC 60HZ | 110-120 V |
| | Type of electrical connection of main circuit | Bolt connection |
| **CONSTRUCTION** | IP rating | IP00 |
| | Mounting method | Screw mounting |
| **DIMENSIONS** | Height | 200 mm |
| | Width | 145 mm |
| | Depth | 208 mm |
| | Weight | 7.5 kg |




Published on 30 May 2026

# GH15RTML110V

**Ghisalba Contactor Latching 110kW 3Pole 110VAC and VDC Close Release**

ELECTRICAL ENGINEERING PRODUCTS

## DIMENSIONAL DIAGRAM

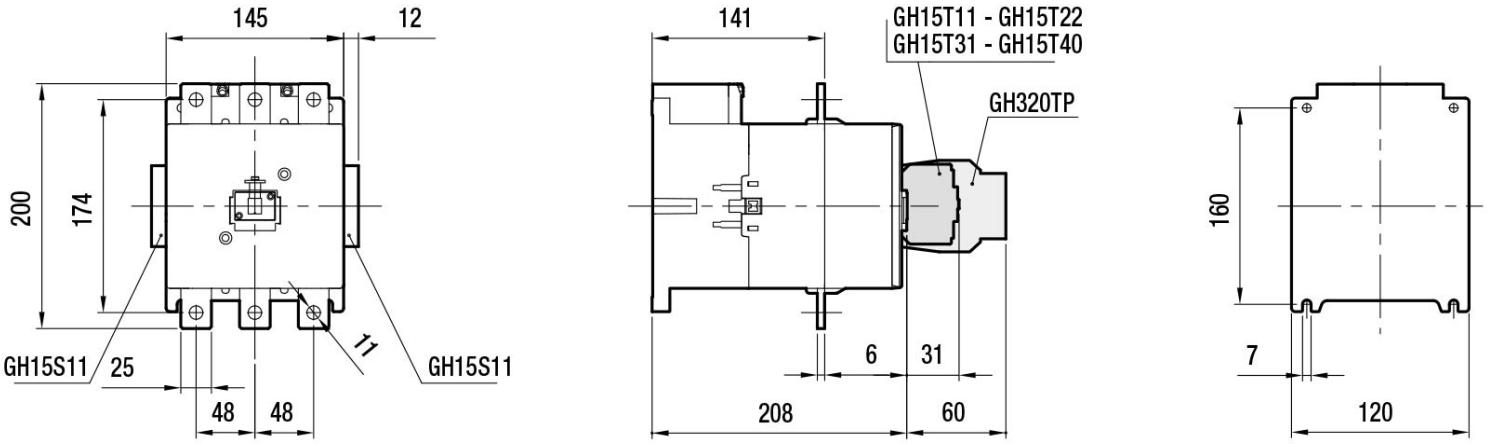




Published on 30 May 2026